


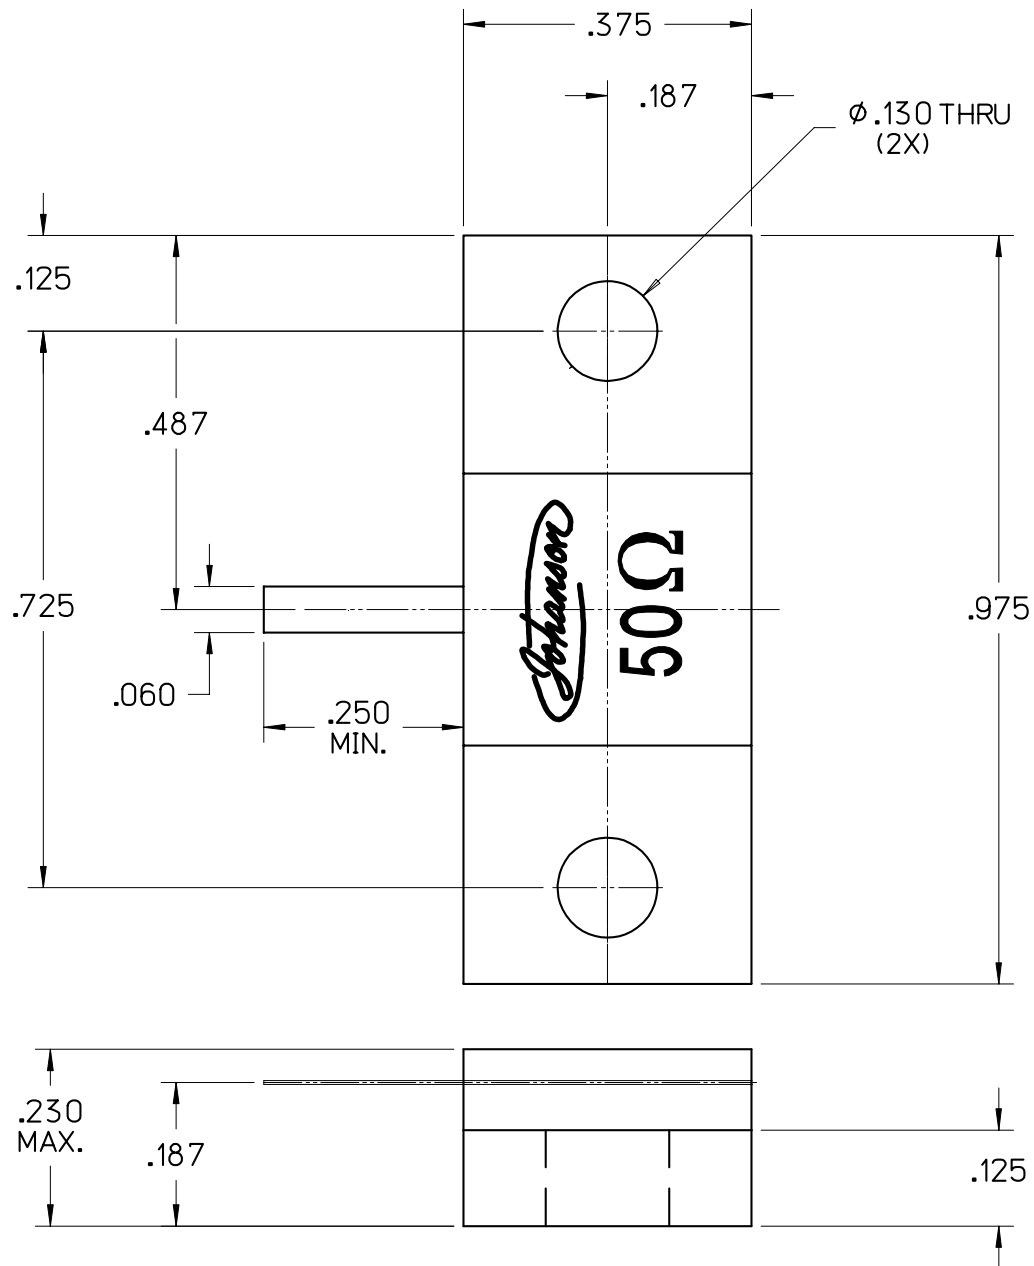

MI DRG. NO.

TF250BB12-040C

REV.

TF250BB12-040

C

HIGH POWER BeO TERMINATION

SPECIFICATIONS		FILE: TERMOUT
POWER MAX (WATTS):	250 CW	
RESISTANCE	50 OHMS (±5%)	

CAUTION

THIS SUBSTRATE USES BERYLLIUM OXIDE
USE CARE WHEN HANDLING.
DO NOT SCRATCH OR ABRASIVE
TRIM IN OPEN AREA.

C	01/17/09	MAI	MAI	MAI	000747
B	02/15/08	MLD	MAI	MAI	000646
A	07/31/07	SAF	-	-	000574
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
SAF	MAI	MAI	4" = 1"
DATE	DATE	DATE	.XX ± .015
7/31/07	08/06/07	08/06/07	.XXX ± .010



JOHANSON MANUFACTURING CORPORATION

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL