
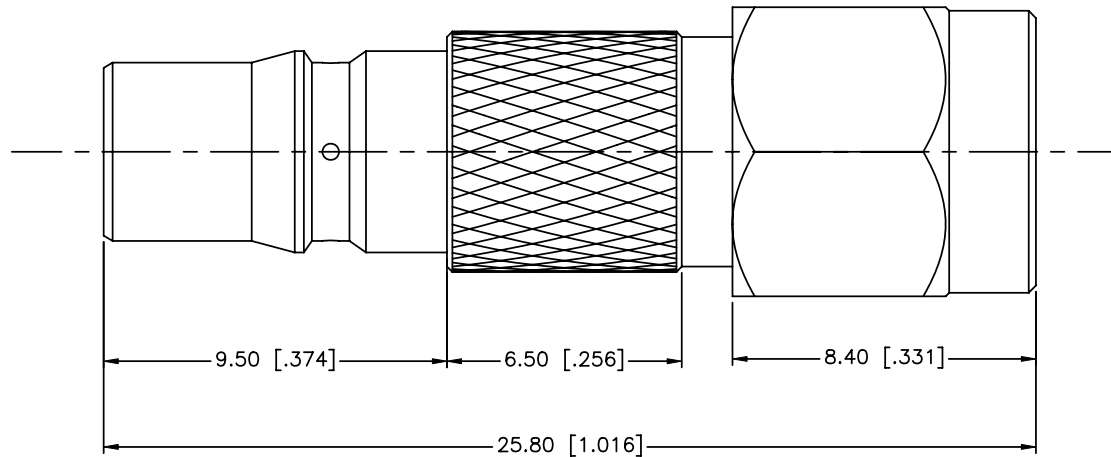


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/06/12	XXXXXX	INITIAL RELEASE

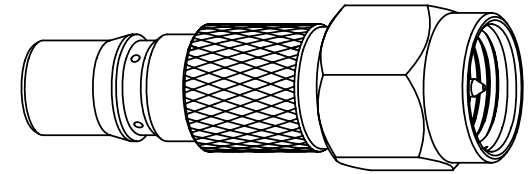

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0–18 GHz
3. RETURN LOSS: 1.07 MAX @ DC TO 3 GHz;
1.08 MAX @ 3~6 GHz;
1.18 MAX @ 6~10 GHz;
1.30 MAX @ 10~18 GHz.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
5. DURABILITY: 100 CYCLES MIN.
6. TEMPERATURE RANGE: -65°C TO +165°C

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
DRAWN		I.XU		05/02/12											
CHECKED						PART DESCRIPTION QMA JACK TO SMA PLUG ADAPTOR									
ISSUED															
SHEET		1 OF 1													
						PART NO. 242263									
CAD FILE		C:/CONNEX/242263.DWG				DWG. NO.		242263.DWG		REV.	NC	SIZE	A	SCALE	NA