

ADAPTERS, BETWEEN-SERIES

7mm / SMA, DC - 18 GHz, Precision

SPECIFICATIONS:

Models: 5110, 5111

RoHS
Compliant

Electrical:

Frequency Range _____ DC - 18 GHz
VSWR _____

DC - 4 GHz _____ 1.04:1 Max.

4 - 8 GHz _____ 1.07:1 Max.

8 - 18 GHz _____ 1.12:1 Max.

Impedance _____ 50 Ohms

Operating Temp. Range _____ -65°C to +125°C

Mechanical:


SMA Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348

7mm Connectors _____ Electropolished Stainless Steel
IAW IEEE STD 287


Conductors _____ Gold Plated Beryllium Copper

AEROFLEX
A passion for performance.

Model Number: **5110**
7mm / SMA Male

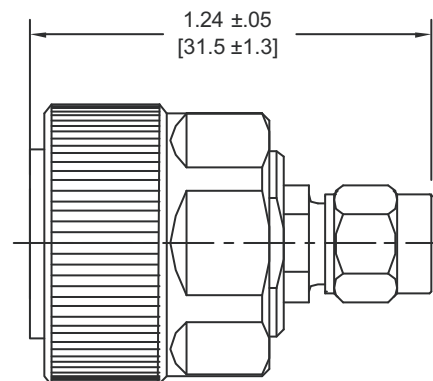

Model Number: **5111**
7mm / SMA Female

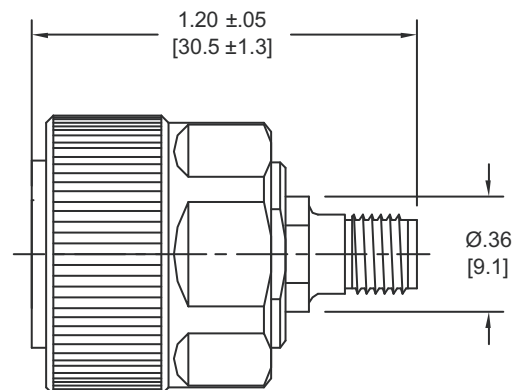

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5110: REV B

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com