

ADAPTERS, BETWEEN-SERIES

Type N / SMA, DC - 18 GHz, Bulkhead Mount

SPECIFICATIONS:

Models: 5203, 5207, 5216, 5217

RoHS
Compliant

AEROFLEX
A passion for performance.


Electrical:

Frequency Range _____ DC - 18.0 GHz
Standard Freq. Values _____ 6* & 18 GHz
VSWR _____
DC - 4 GHz _____ 1.04:1 Max.
4 - 8 GHz _____ 1.07:1 Max.
8 - 18 GHz _____ 1.12:1 Max.
Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +125°C

Mechanical:


Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348 _____
Conductors _____ Gold Plated Beryllium Copper

*For DC - 6 GHz Units add -067 to the Model Number

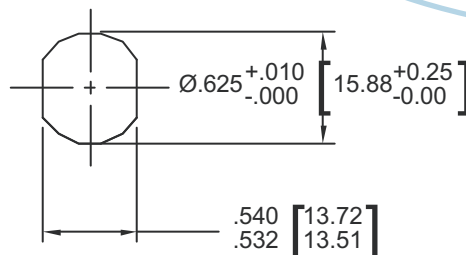


Recommended Panel Configuration

Model Number: **5207**
Type N Female / SMA Male
No O-Ring Included

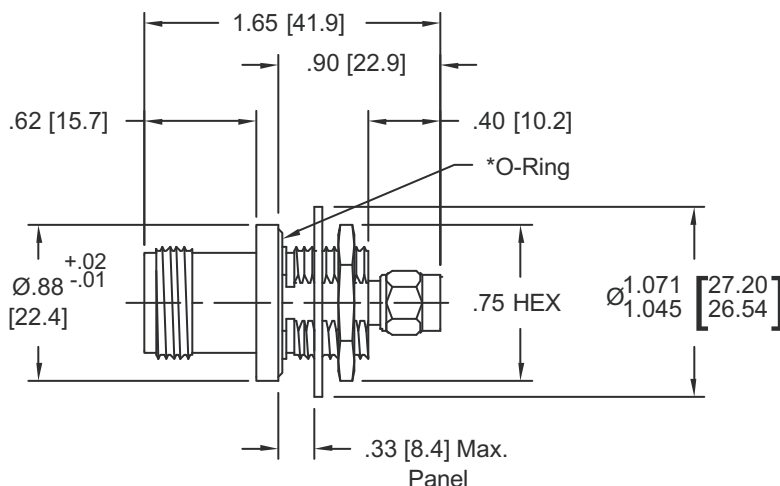

Model Number: **5216**
Type N Female / SMA Male
*Includes O-Ring

Model Number: **5203**
Type N Female / SMA Female
No O-Ring Included

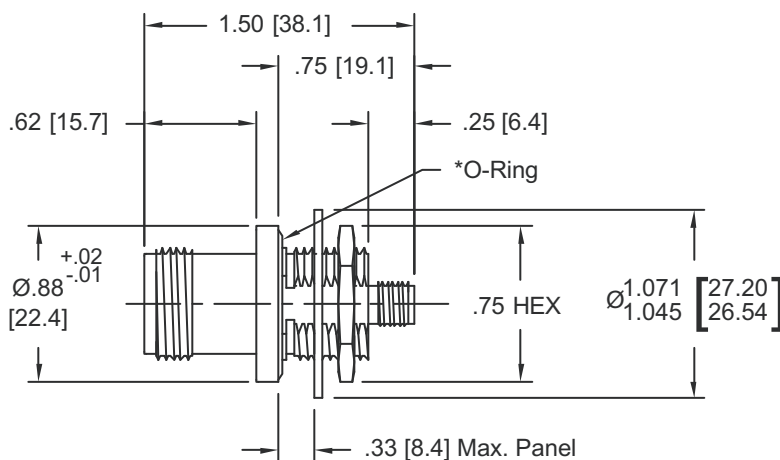

Model Number: **5217**
Type N Female / SMA Female
*Includes O-Ring

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

5207: REV G

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com