

ADAPTERS, BETWEEN-SERIES

Type N / SMA, DC - 18 GHz, Bulkhead Mount

SPECIFICATIONS:

Models: 5203, 5207, 5216, 5217

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC - 18.0 GHz
VSWR _____

DC - 4 GHz _____ 1.04:1 Max.

4 - 8 GHz _____ 1.07:1 Max.

8 - 18 GHz _____ 1.12:1 Max.

Impedance _____ 50 Ohms

Operating Temp Range _____ -65°C to +125°C


Mechanical:

Connectors _____ Passivated Stainless Steel
(Mates with MIL-STD-348)

Conductors _____ Gold Plated Beryllium Copper


Nut & Washer _____ Passivated Stainless Steel

O-Ring _____ Silicone Rubber

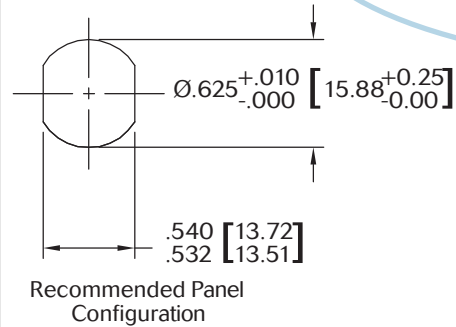

Model Number: **5207**

Type N Female / SMA Male
No O-Ring Included

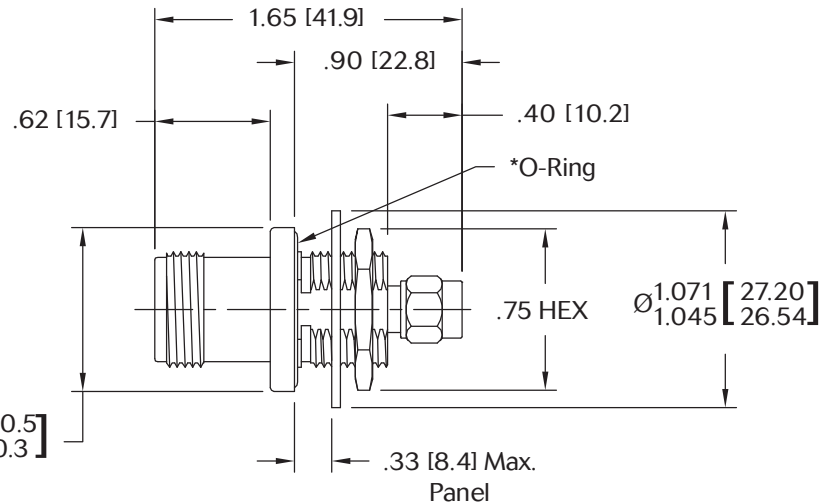


Model Number: **5216**

Type N Female / SMA Male
*Includes O-Ring



Model Number: **5203**

Type N Female / SMA Female
No O-Ring Included

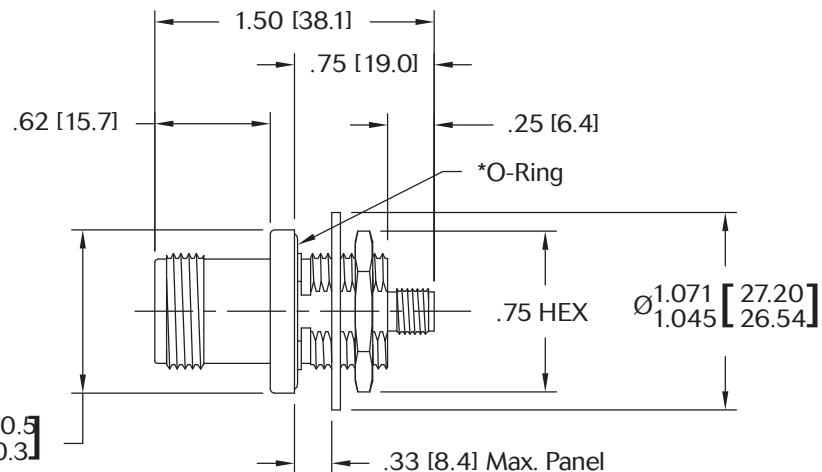

Model Number: **5217**

Type N Female / SMA Female
*Includes O-Ring



Panel Nut, Lock Washer & O-Ring are Shipped Unassembled

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

Design specifications are subject to change without notice.

Contact factory for technical specifications before purchasing or use.

5207: REV J

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet@aeroflex.com