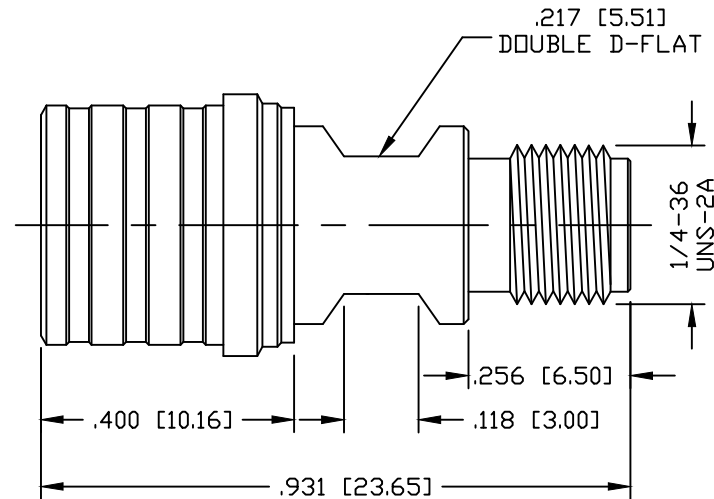


PART NO.

RQA-5405

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	11/04/14	JDMc

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-11 GHz
 VSWR (RETURN LOSS): 32 dB MIN. @ DC-4 GHz,
 22 dB MIN. @ DC-6 GHz
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 Vrms MIN.
 TEMPERATURE RANGE: -65°C TO 165°C

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLY
 UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]

DRAWN	C. ZUNIGA	11/04/14
CHECKED		
ORJ DRAWN	C. ZUNIGA	11/04/14

RoHS
COMPLIANT

 PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

**QMA PLUG TO
SMA JACK ADAPTER**

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RQA-5405	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	008974		

#	DESCRIPTION	QTY	MATERIAL	FINISH
3	CONTACT	1	BeCu	SILVER
2	INSULATOR	1	PTFE	---
1	BODY	1	BRASS	WHITE BRONZE