
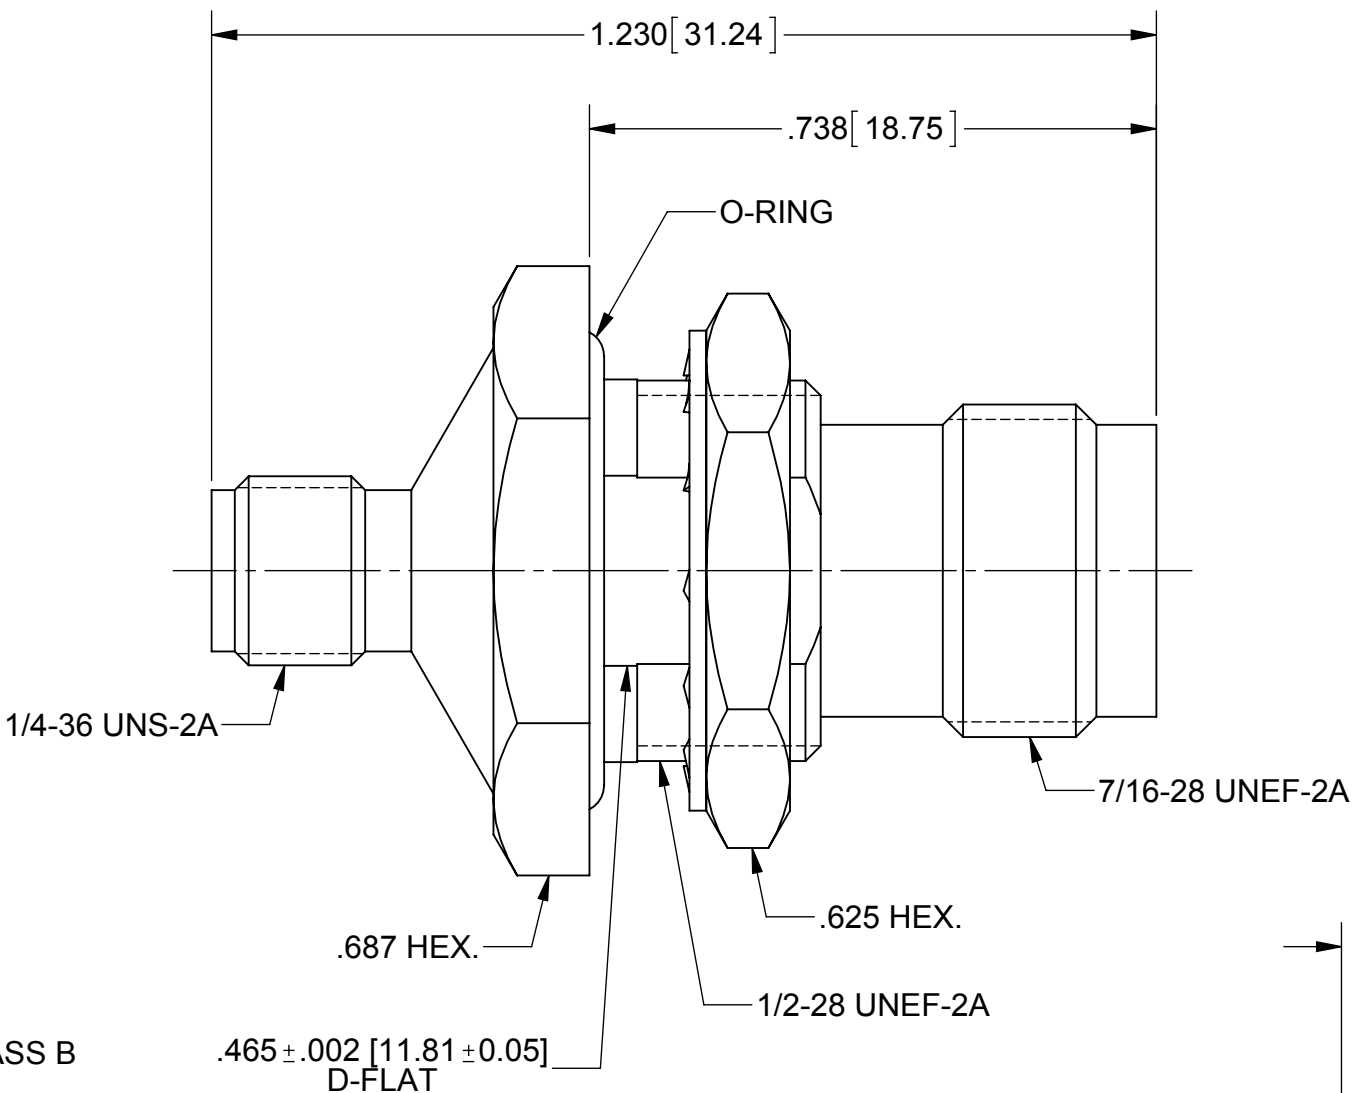


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 38585	09/11	PJS
A	DCN 38692	11/11	FSG

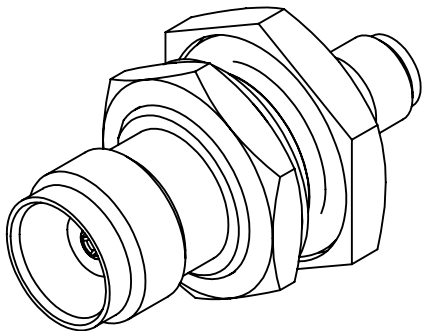

RECOMMENDED MOUNTING HOLE

MATERIAL:

- BODY &
HEX NUT:STAINLESS STEEL PER AMS-5640,
ALLOY UNS S30300, TYPE 1
- CONTACT:BERYLLIUM COPPER PER ASTM B196,
ALLOY No. UNS C17300, TD04
- INSULATORS:PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B
- O-RING:SILICONE RUBBER PER A-A-59588,
CLASS 2B, GRADE 60/70
- LOCKWASHER:300 SERIES STAINLESS STEEL

FINISH:

- BODY,
LOCKWASHER &
HEX NUT:PASSIVATED PER AMS-2700
- CONTACT:GOLD PER ASTM B488, TYPE II,
CODE C, CLASS .76, OVER NICKEL
PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

- IMPEDANCE:50 OHMS
- FREQ. RANGE:DC TO 18.0 GHz

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--