

ADAPTERS, In-Series

1.85mm, DC - 65 GHz, Bulkhead Mount

SPECIFICATIONS:

Models: 5289, 5290

RoHS
Compliant

AEROFLEX
A passion for performance.


Electrical:

Frequency Range _____ DC - 65 GHz
VSWR _____
DC - 26.5 GHz _____ 1.25:1 Max.
26.5 - 50 GHz _____ 1.35:1 Max.
50 - 65 GHz _____ 1.40:1 Max.
Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +125°C

Mechanical:

Connectors _____ Passivated Stainless Steel
Mates with 2.4mm & V* connectors
Conductors _____ Gold Plated Beryllium Copper
O-Ring _____ 70 Durometer Buna N

* V is a Trademark of Anritsu Corp.

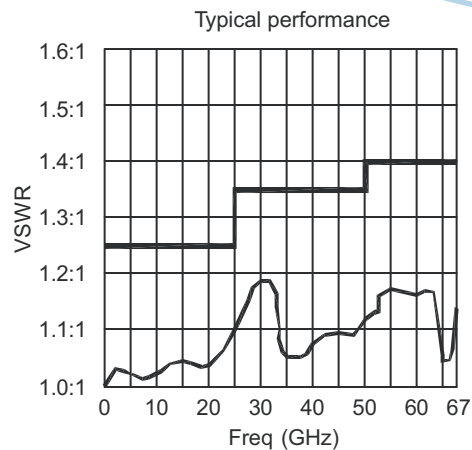



Model Number: **5289**

*Includes O-Ring as Shown

Model Number: **5290**

No O-Ring Included

**Recommended
Mounting Hole**

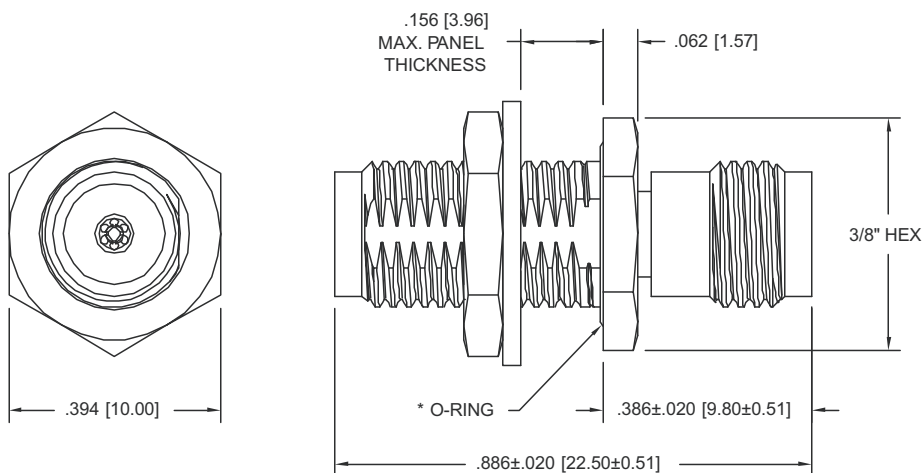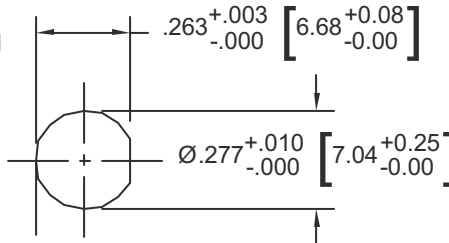

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design, specifications are subject to change without notice. Contact factory for technical specifications before purchasing and/or use.

5289: REVA

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@aeroflex.com