


PRODUCT DATA DRAWING

CAD
GENERATED
DRAWING

DCN
CONTROLLED
DOCUMENT

DWG. NO.

SF2990-6005

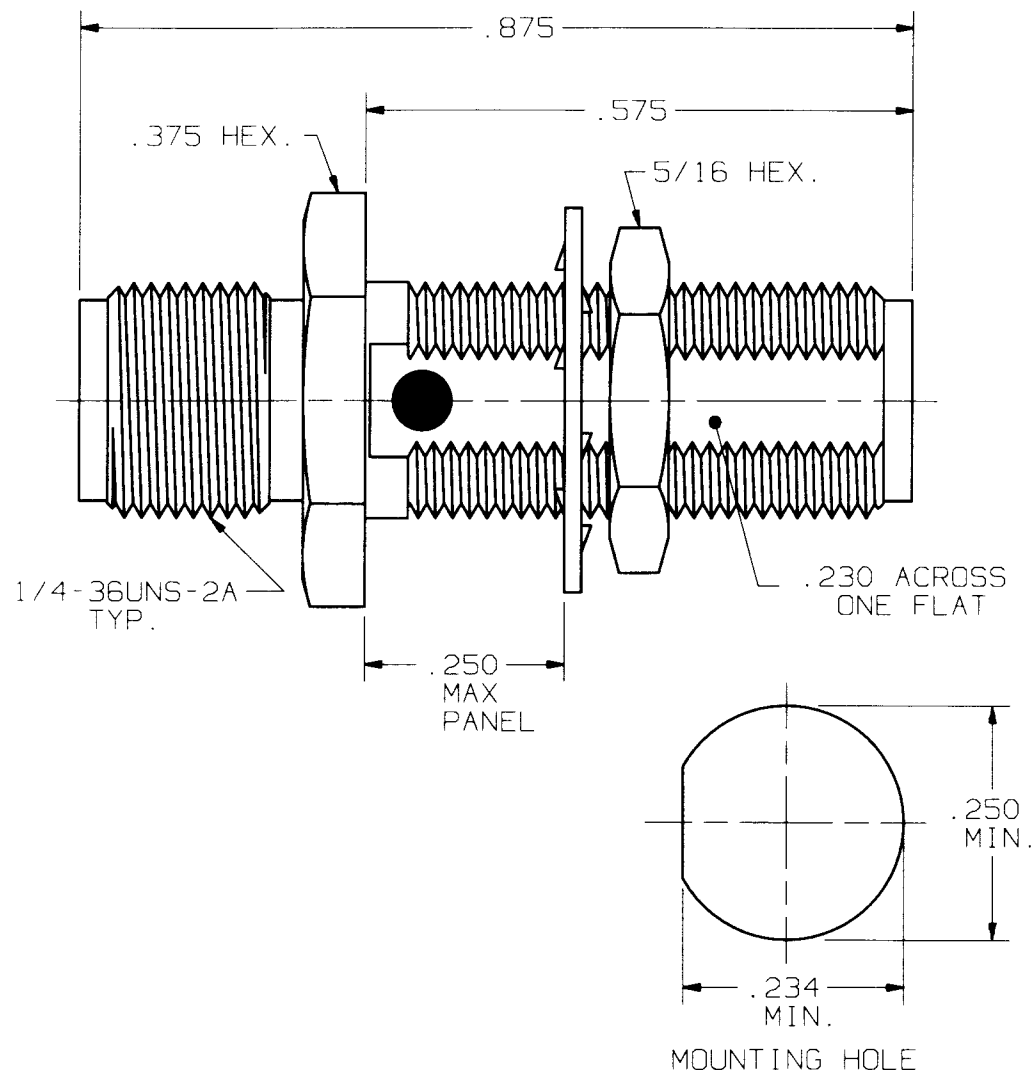

MATERIAL:

BODY, HEX NUT
& LOCK WASHER: STAINLESS STEEL PER AMS-5640,
UNS S30300, TYPE I.

CONTACT: BERYLLIUM COPPER PER ASTM-B-196,
ALLOY C17300, COND. TD04.

INSULATOR: TEFLON PER ASTM-D-1457.

FINISH:

BODY, HEX NUT
& LOCK WASHER: PASSIVATED PER QQ-P-35C,
TYPE II.

CONTACT: GOLD PER MIL-G-45204, TYPE I,
GRADE C, CLASS 1; OVER NICKEL
PER QQ-N-290, CLASS 1.

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC-18.0 GHz
D.W.V.: 1000 VRMS
INSUL. RES.: 5000 MEGOHMS

SYM.	DESCRIPTION	DATE	APPR.	UNLESS OTHERWISE SPECIFIED: 1)ALL DIMENSIONS ARE AFTER PLATING. 2)BREAK CORNERS & EDGES .005 R. MAX. 3)CHAM. 1st & LAST THDS. 4)SURFACE ROUGHNESS 63 / MIL-STD-10. 5)DIAS. ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6)REMOVE ALL BURRS.	DIMENSIONS ARE IN INCHES TOLERANCES: DECIMALS FRACTIONAL ANGULAR .X ±.030 .XX ±.015 .XXX ±.005 +1/64 X° ±1°0' X°X' ±15'			Solitron Vector Microwave 3301 ELECTRONICS WAY WEST PALM BEACH, FL. 33407	
C	REV.DCN F9360	6/83	RG		MATERIAL: SEE ABOVE			TITLE: SMA JACK TO JACK JAM NUT MOUNT	
D	REV.DCN 23350	4/97			FINISH: SEE ABOVE AREA: N/A				
				REDRAWN: BRT 4/02/97	SIZE	CAGE NO.	SCALE	DWG. NO. SF2990-6005	
				CHECKED:	A	95077	5X		
				APPROVED: DGG 11/20/79					