


NOTES:

1. PACKAGE CABLE ASSEMBLY INDIVIDUALLY IN HEAT SEALED POLY BAG.
TAG IN BAG WITH “AMPHENOL CONNEX, 135101-08-XX.XX AND DATE CODE”.
2. CABLE ASSEMBLY TO BE 100% TESTED FOR HI-POT, CONTINUITY, SHORTS AND OPEN.

135101-08-XX.XX		REVISIONS			
DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ. 	A	RELEASE TO MFG.	20-Dec-12	--	MG

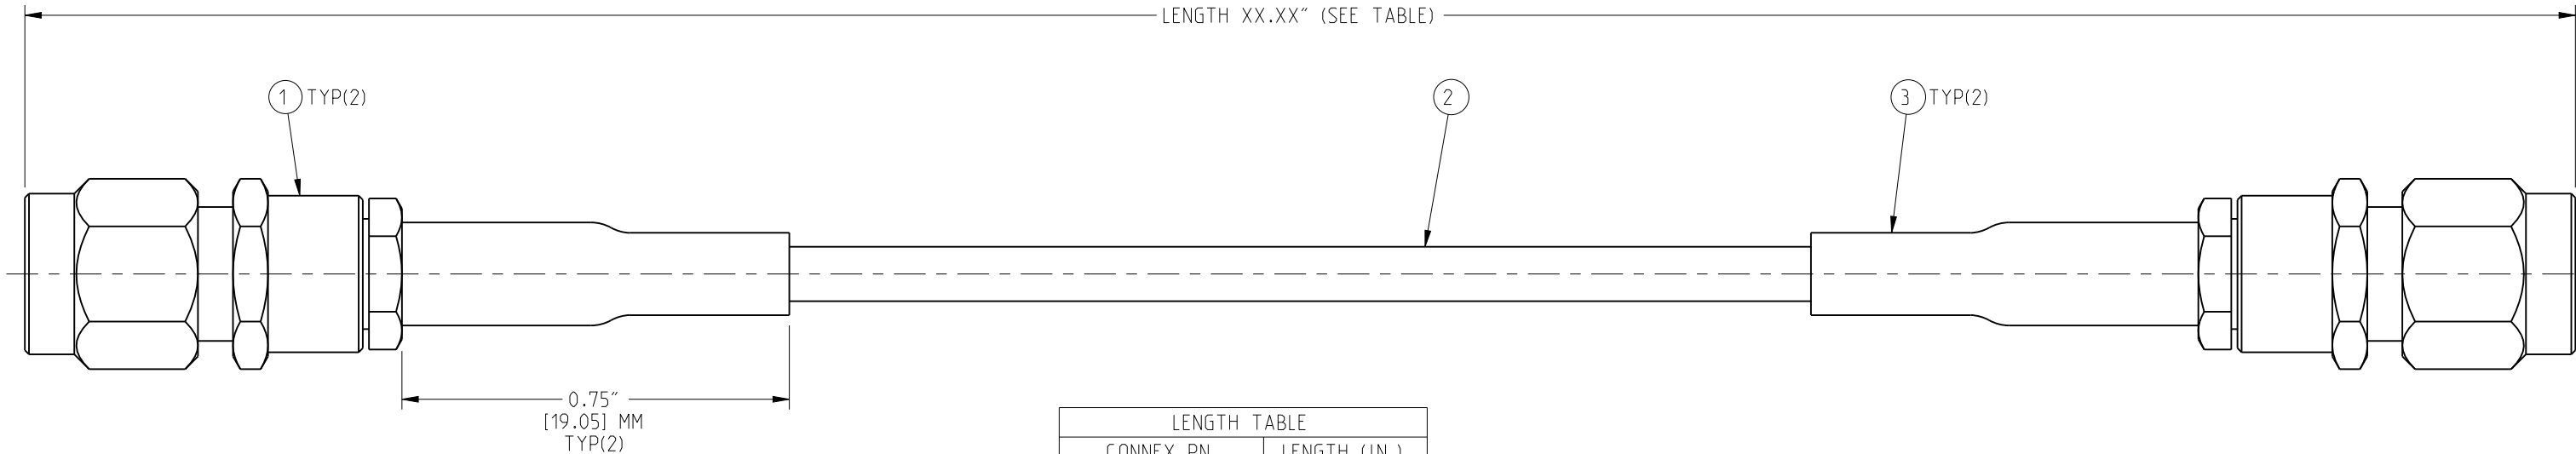

LENGTH TABLE	
CONNEX PN	LENGTH (IN.)
135101-08-06.00	6.00 ±0.25
135101-08-12.00	12.00 ±0.25
135101-08-24.00	24.00 ±0.50
135101-08-36.00	36.00 ±0.50

* ADDITIONAL LENGTH CAN BE PROVIDED
BY CHANGING XX.XX TO DESIRED LENGTH IN INCHES
CONTACT CONNEX MARKETING FOR QUOTE

DESIGN REQUIREMENTS:

- ☐ FREQUENCY _____ TO _____ GHz
- ☒ CONTINUITY
- ☐ VSWR ____ : 1 MAX
- ☒ HI-POT : 500 VRMS
- ☐ INS. LOSS _____ dB MAX
- ☐ OTHER

009-954-458	A/R	3	HEAT SHRINK TUBING	BLACK
009-881-240	A/R	2	RG 178 COAXIAL CABLE	
132193	2	1	SMA CRIMP PLUG	
PART NUMBER	QTY	ITEM	DESCRIPTION	FINISH

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES ±.015 (0,381 mm) ±.005 (0,127 mm) ± 1°	MATERIAL	DRAWN GOPI M	DATE 20-Dec-12	TITLE SMA CRIMP PLUG TO SMA CRIMP PLUG, USING RG 178 COAXIAL CABLE XX.XX" LENGHTS		Amphenol Connex	
		ENGINEER GOPI M	DATE 20-Dec-12				
	REFERENCE	APPROVED	DATE	SCALE: 3.2:1		SHEET	1 OF 1
		CAD FILE			DWG SIZE B	DRAWING NO. 135101-08-XX.XX	REV A