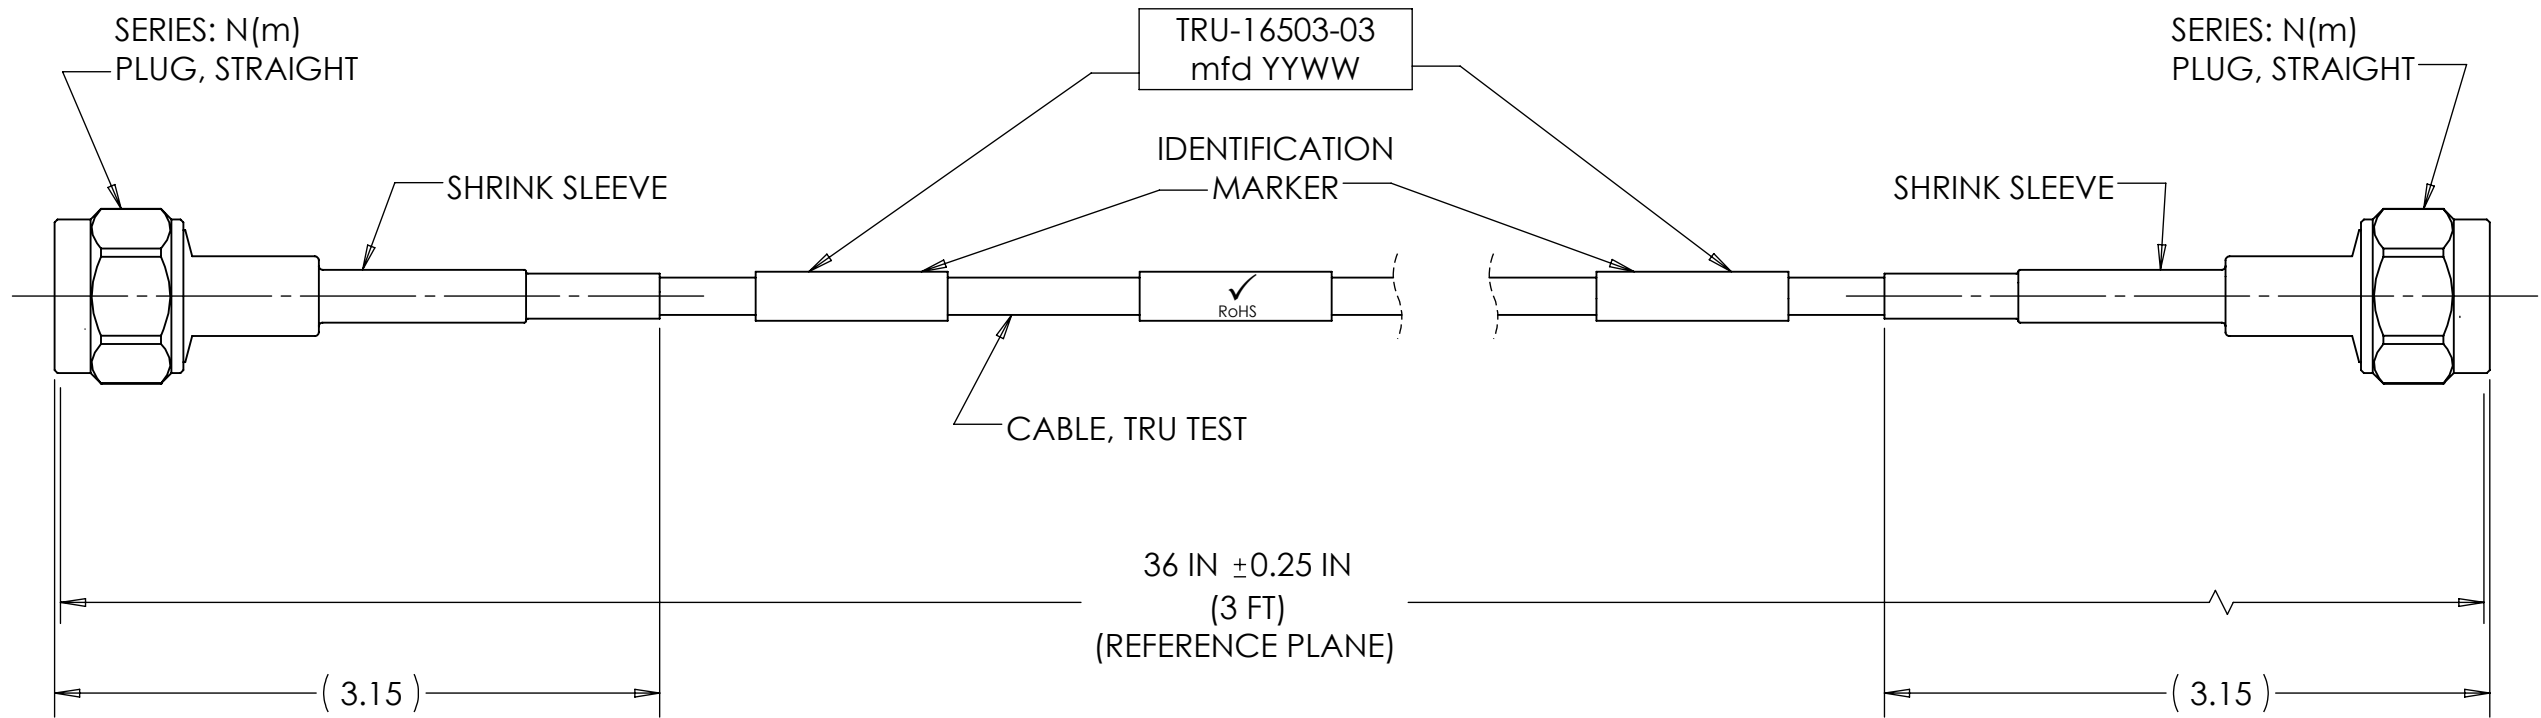




This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	09/10/12	TRC



- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE REFERENCE ONLY.
  - 2. ELECTRICAL SPECIFICATIONS:  
FREQUENCY RANGE: .05 TO 18 GHz  
VSWR MAX: 1.35:1  
INSERTION LOSS: MAX: 1.60 dB
  - 3. PRODUCT COMPLIES WITH RoHS DIRECTIVE 2002/95/EC

MATERIAL	DO NOT SCALE DRAWING		DRAWN TRC	DATE 08/24/12	 <b>TRU Corporation</b> 245 Lynnfield St, Peabody, MA 01960		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		ENG APPR. TRC	DATE 09/10/12			
	TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES:		MFG APPR.	DATE	TITLE:  CABLE ASSEMBLY TRUtest18-Nm-Nm-3.0		
	63/		OTHER APPR. AM	DATE 09/05/12			
COMMENTS:			THIRD ANGLE PROJECTION 		SIZE <b>B</b>	DWG. NO. TRU-16503-03	REV -
					CAGE CODE: 92180	SCALE: 1:1	SHEET 1 OF 1
surface area: sq inch		weight: lbs					