


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASE PER ECO-05-009687	20SEP2005	DRR	MY
			B	REVISED PER ECO-05-015421	06DEC2005	DRR	LZ

D

C

B


A

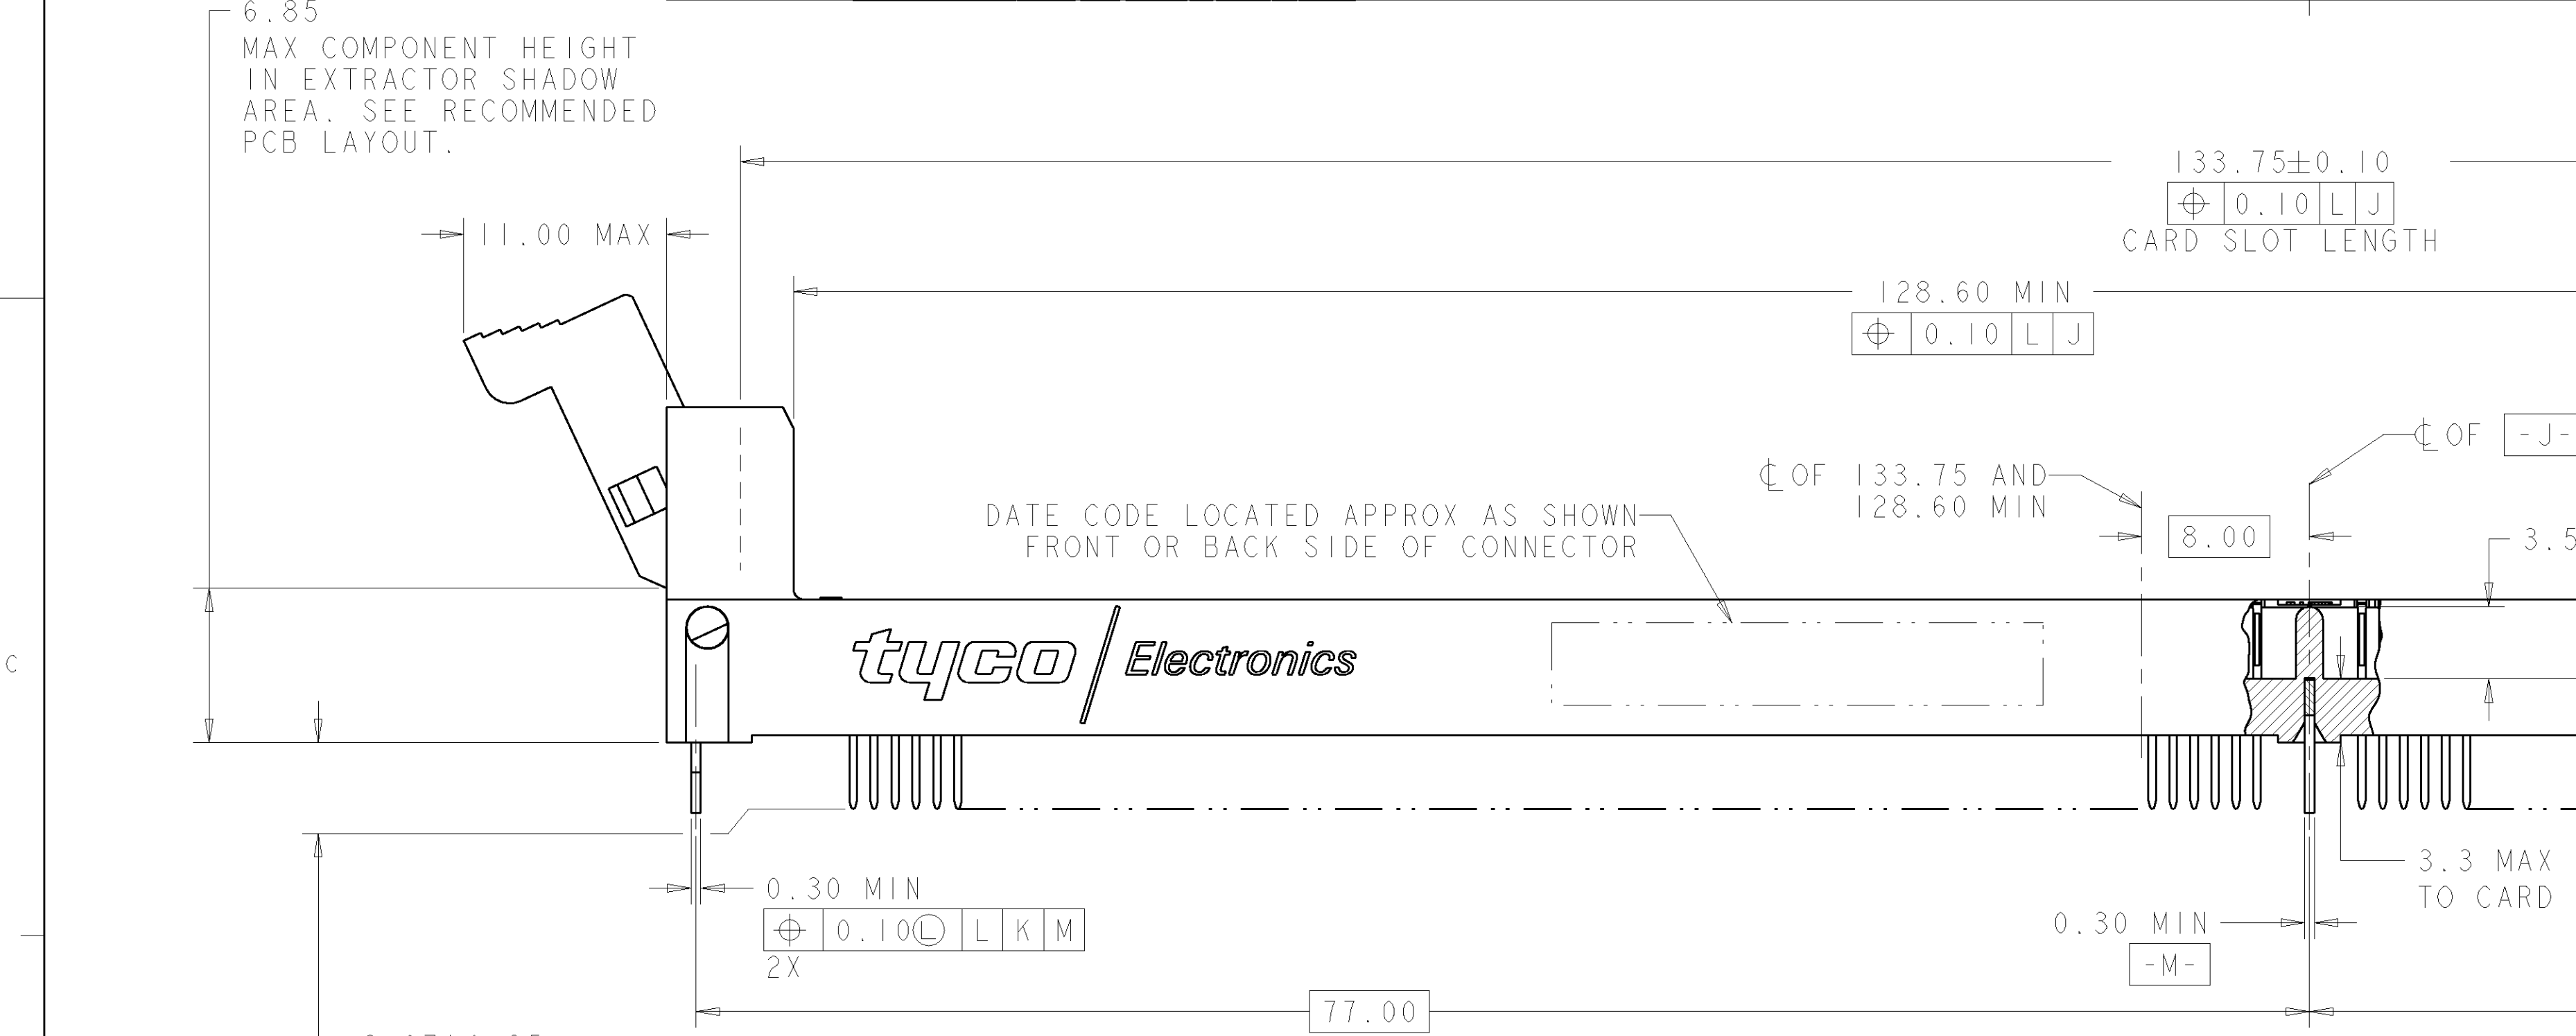

2.67±0.25
FOR 1.60 (.063") THK PCB

3.18±0.25
FOR 2.36 (.093") THK PCB



4.00±0.25
FOR 3.18 (.125") THK PCB

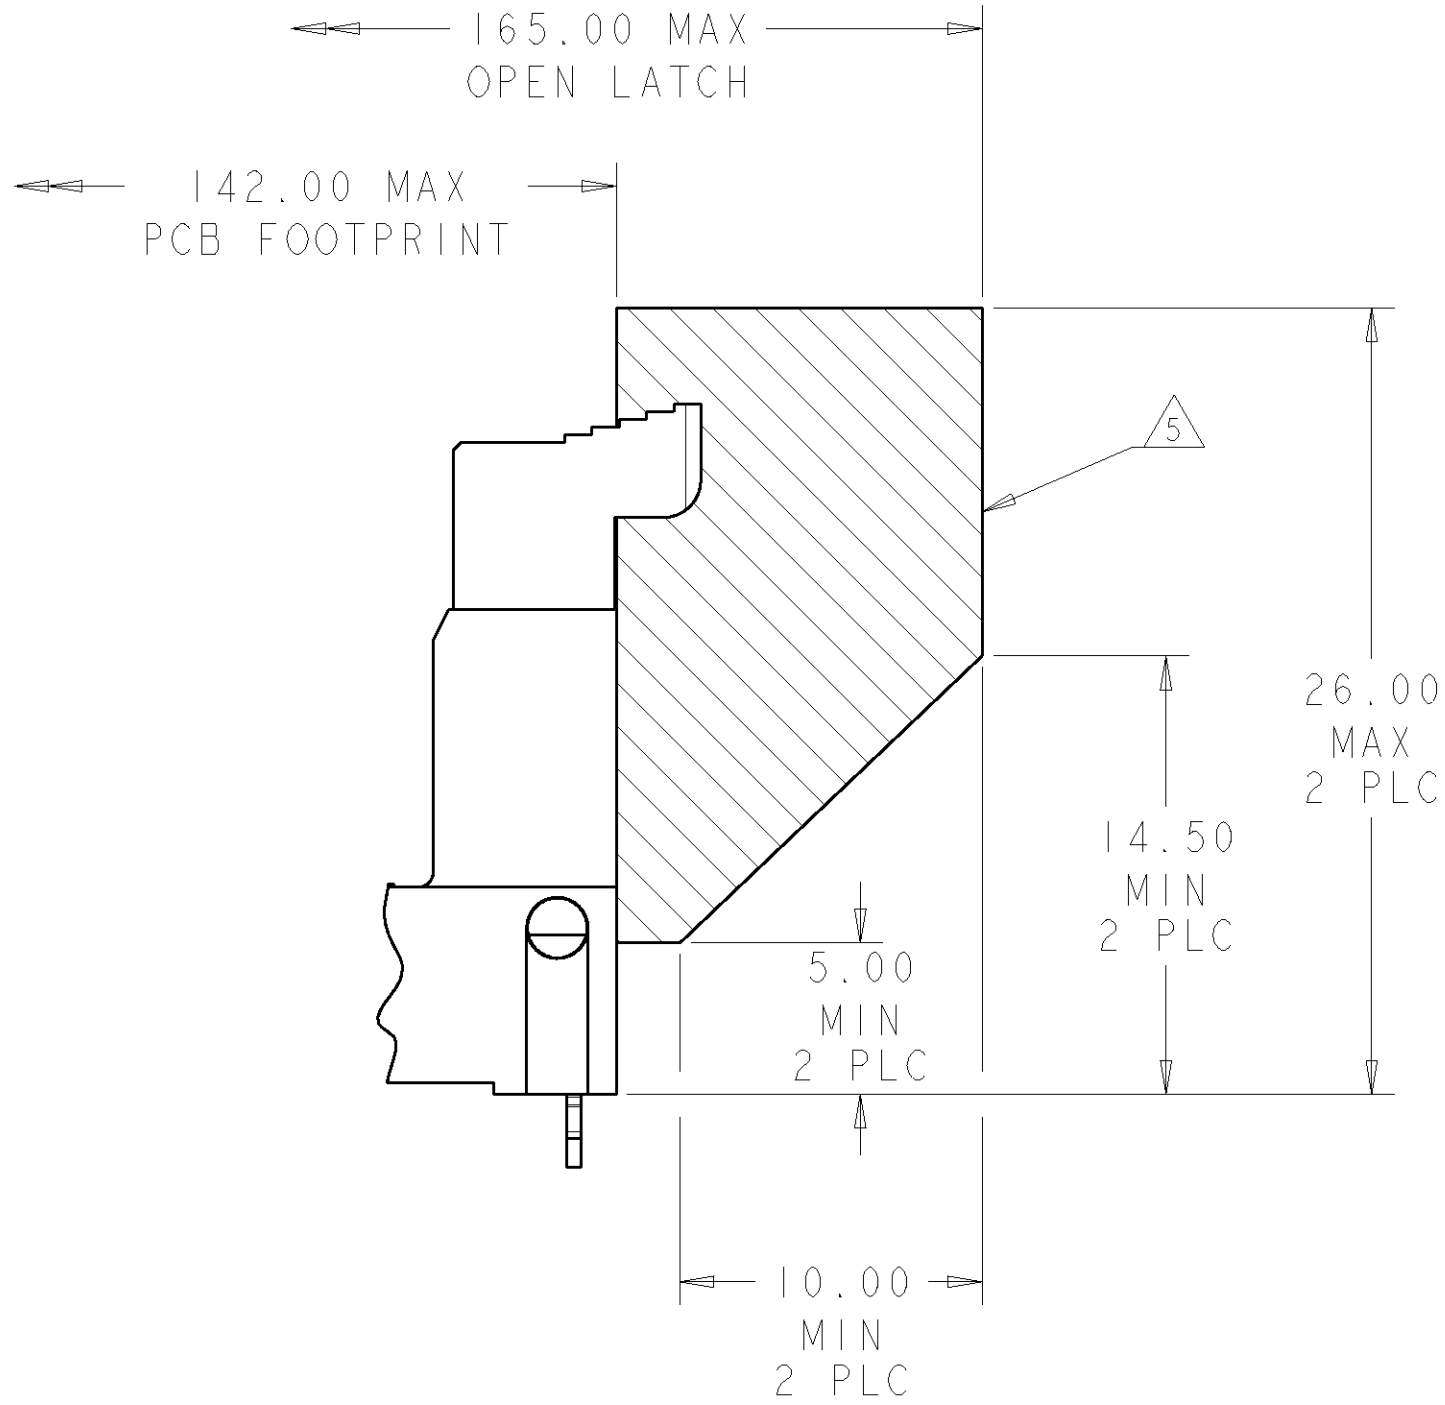

- 1 MATERIALS:
- HOUSING: HIGH TEMPERATURE NYLON, BLACK, UL94 V-0
- EXTRACTOR: HIGH TEMPERATURE THERMOPLASTIC
- CONTACTS: COPPER ALLOY
- RETENTION BARB: STAINLESS STEEL
- 2 INTERFACE FINISH:
- (1) 0.00076 MIN THK GOLD OVER 0.00127 MIN THK NICKEL
- (2) 0.00038 MIN THK GOLD OVER 0.00127 MIN THK NICKEL
- (3) 0.00008 MIN THK GOLD OVER 0.00127 MIN THK NICKEL
- 3 FINISHED HOLE SIZE. 0.15 MAXIMUM ANNULAR RING.
- 4 KEEP OUT ZONE.
- 5 KEEP OUT AREA RESERVED FOR SOCKET EXTRACTORS, BOTH ENDS.
- 6 SOLDER TAIL FINISH:
- 0.00300 MIN THK BRIGHT TIN-LEAD OVER 0.00127 MIN THK NICKEL.
- 7 SOLDER TAIL FINISH:
- 0.00300 MIN THK MATTE TIN OVER 0.00127 MIN THK NICKEL.
- 8 LED LOCATION AS APPLICABLE PER CUSTOMER.
- 9 DATUM -G- IS CONNECTOR SIDE SURFACE OF PCB.

	BLACK		0.00038 MIN	4.00	2-1761024-4
				3.18	2-1761024-3
				2.67	2-1761024-2
	BLACK		0.00076 MIN	4.00	2-1761024-1
				3.18	2-1761024-0
				2.67	1-1761024-9
SUPERCEDED BY 1-1761024-2				4.00	1-1761024-8
SUPERCEDED BY 1-1761024-1			0.00008 MIN	3.18	1-1761024-7
SUPERCEDED BY 1-1761024-0				2.67	1-1761024-6
SUPERCEDED BY 1-1761024-2				4.00	1-1761024-5
	NATURAL		0.00038 MIN	3.18	1-1761024-4
				2.67	1-1761024-3
				4.00	1-1761024-2
	NATURAL		0.00076 MIN	3.18	1-1761024-1
				2.67	1-1761024-0
				4.00	1761024-9
SUPERCEDED BY 1-1761024-2			0.00008 MIN	3.18	1761024-8
SUPERCEDED BY 1-1761024-1				2.67	1761024-7
SUPERCEDED BY 1-1761024-0				4.00	1761024-6
SUPERCEDED BY 1-1761024-2				4.00	1761024-5
SUPERCEDED BY 1-1761024-1			0.00038 MIN	3.18	1761024-4
SUPERCEDED BY 1-1761024-0				2.67	1761024-3
SUPERCEDED BY 1-1761024-2				4.00	1761024-2
SUPERCEDED BY 1-1761024-1			0.00076 MIN	3.18	1761024-1
SUPERCEDED BY 1-1761024-0				2.67	
	EXTRACTOR COLOR	SOLDER TAIL	CONTACT GOLD INTERFACE 	TAIL LENGTH	PART NUMBER

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

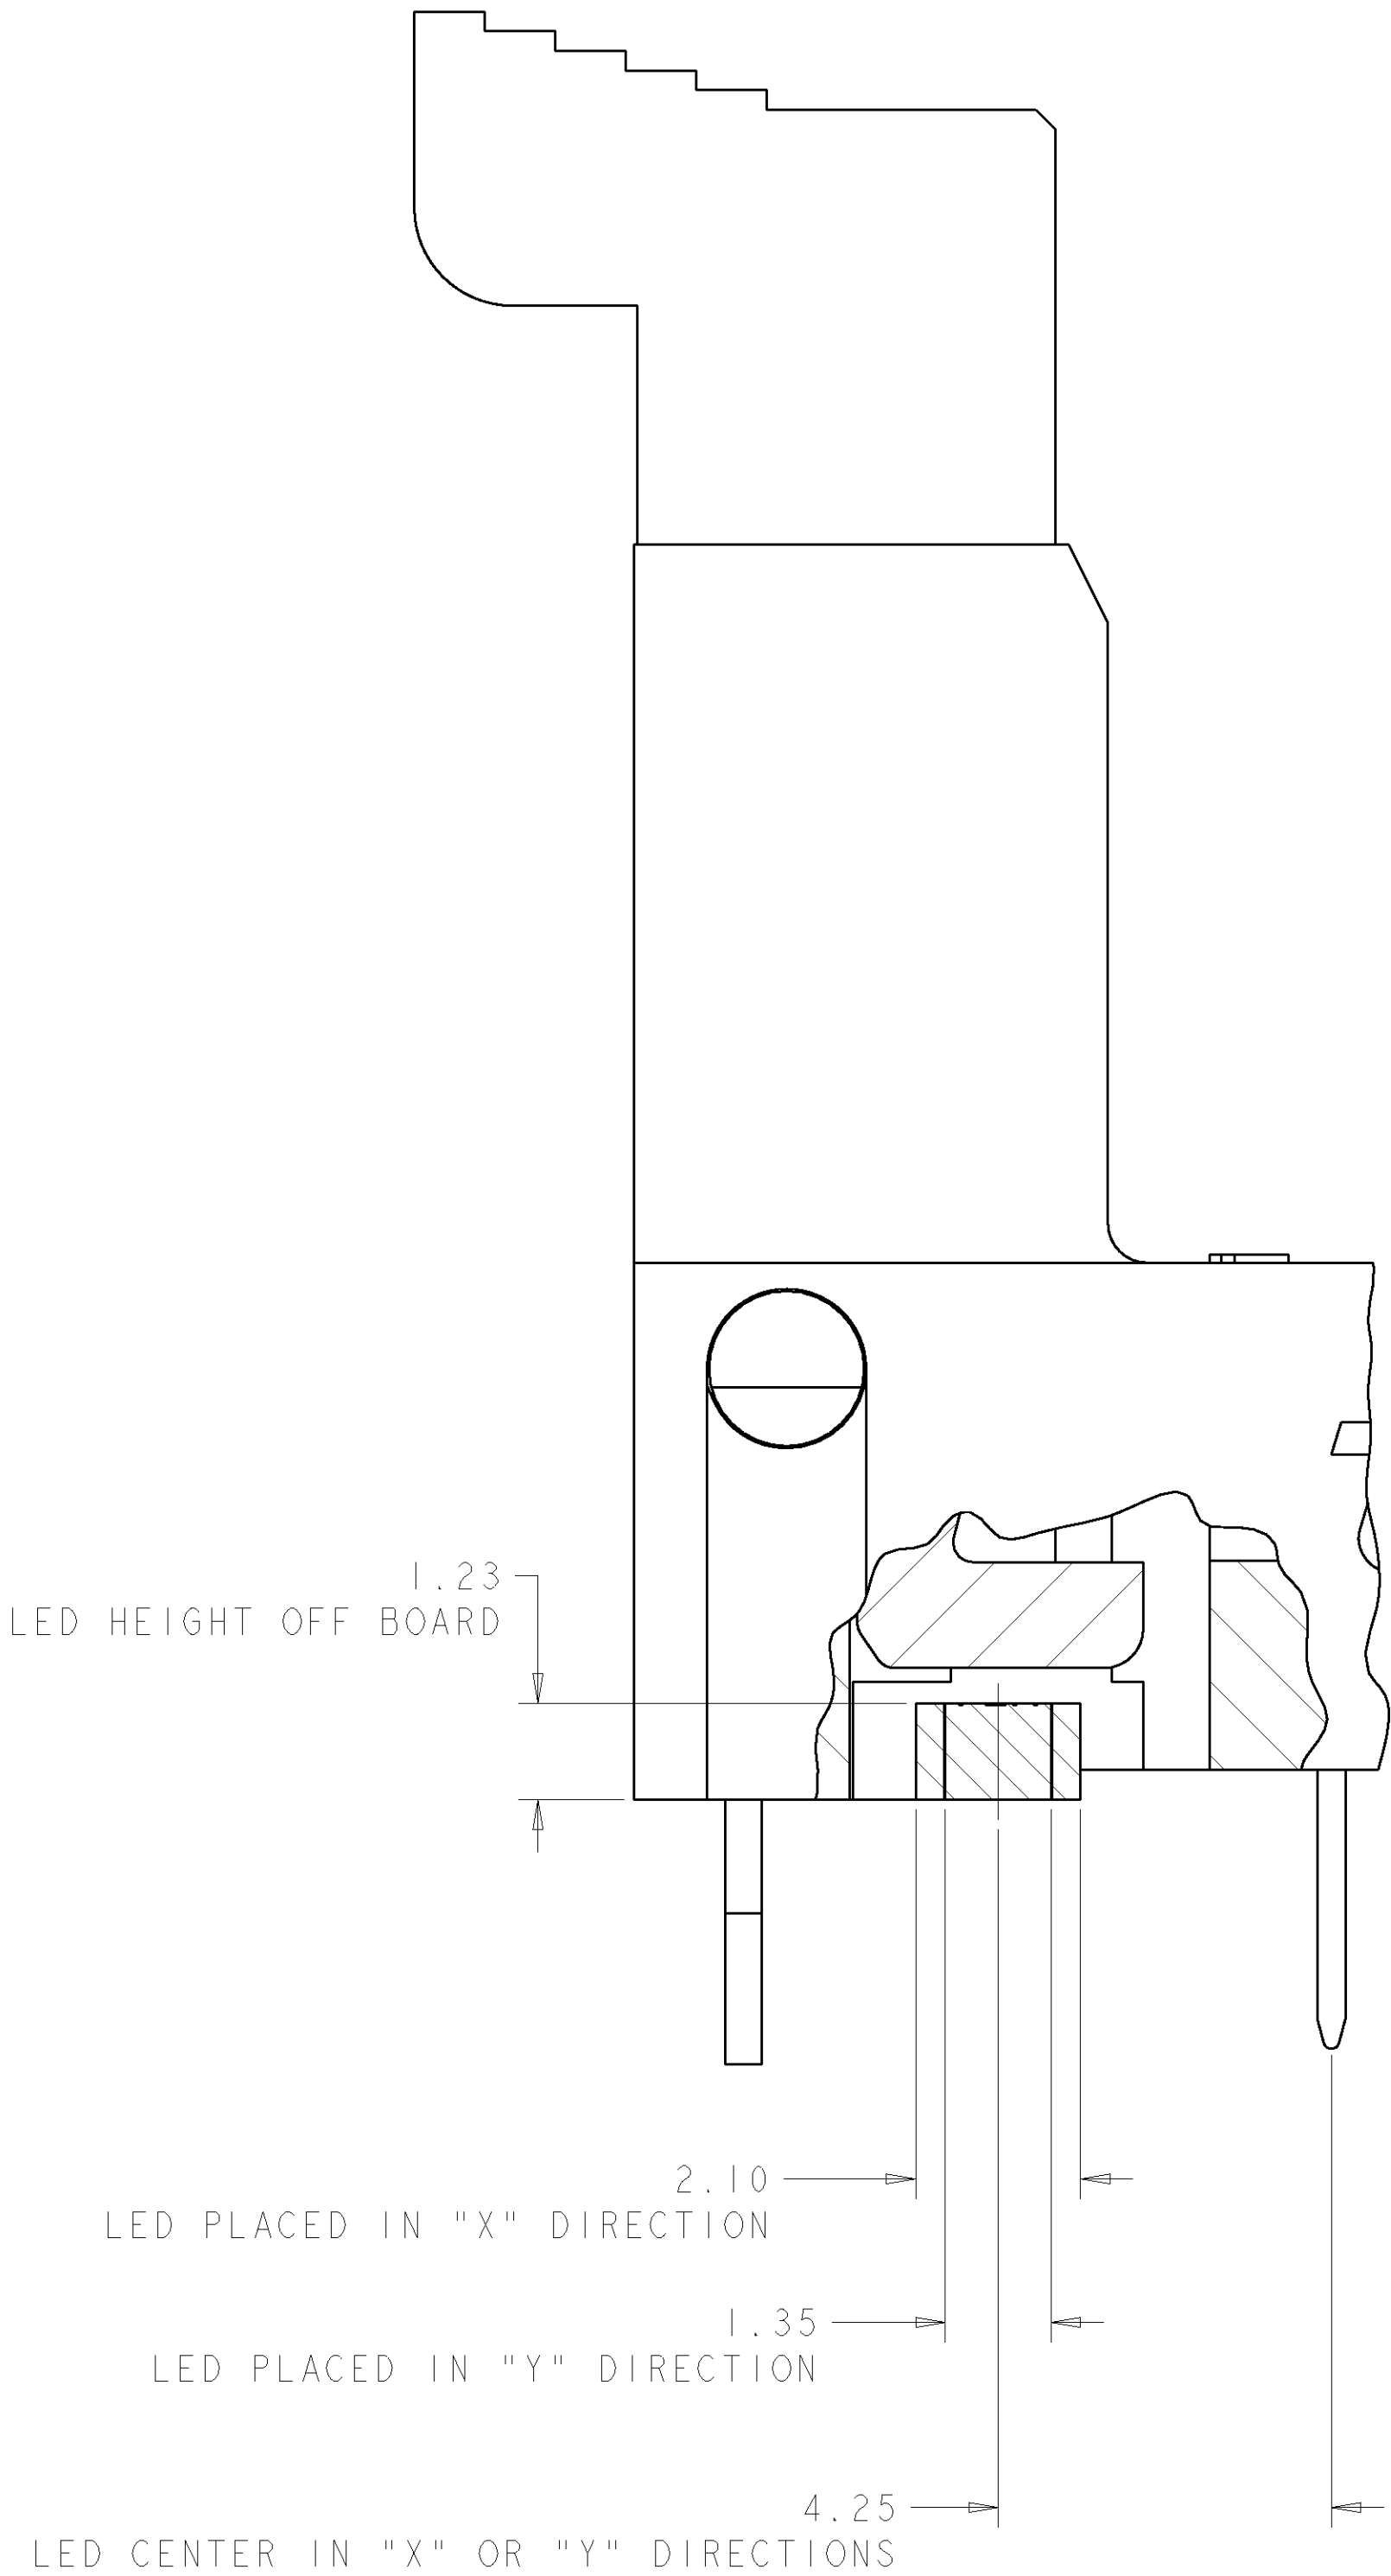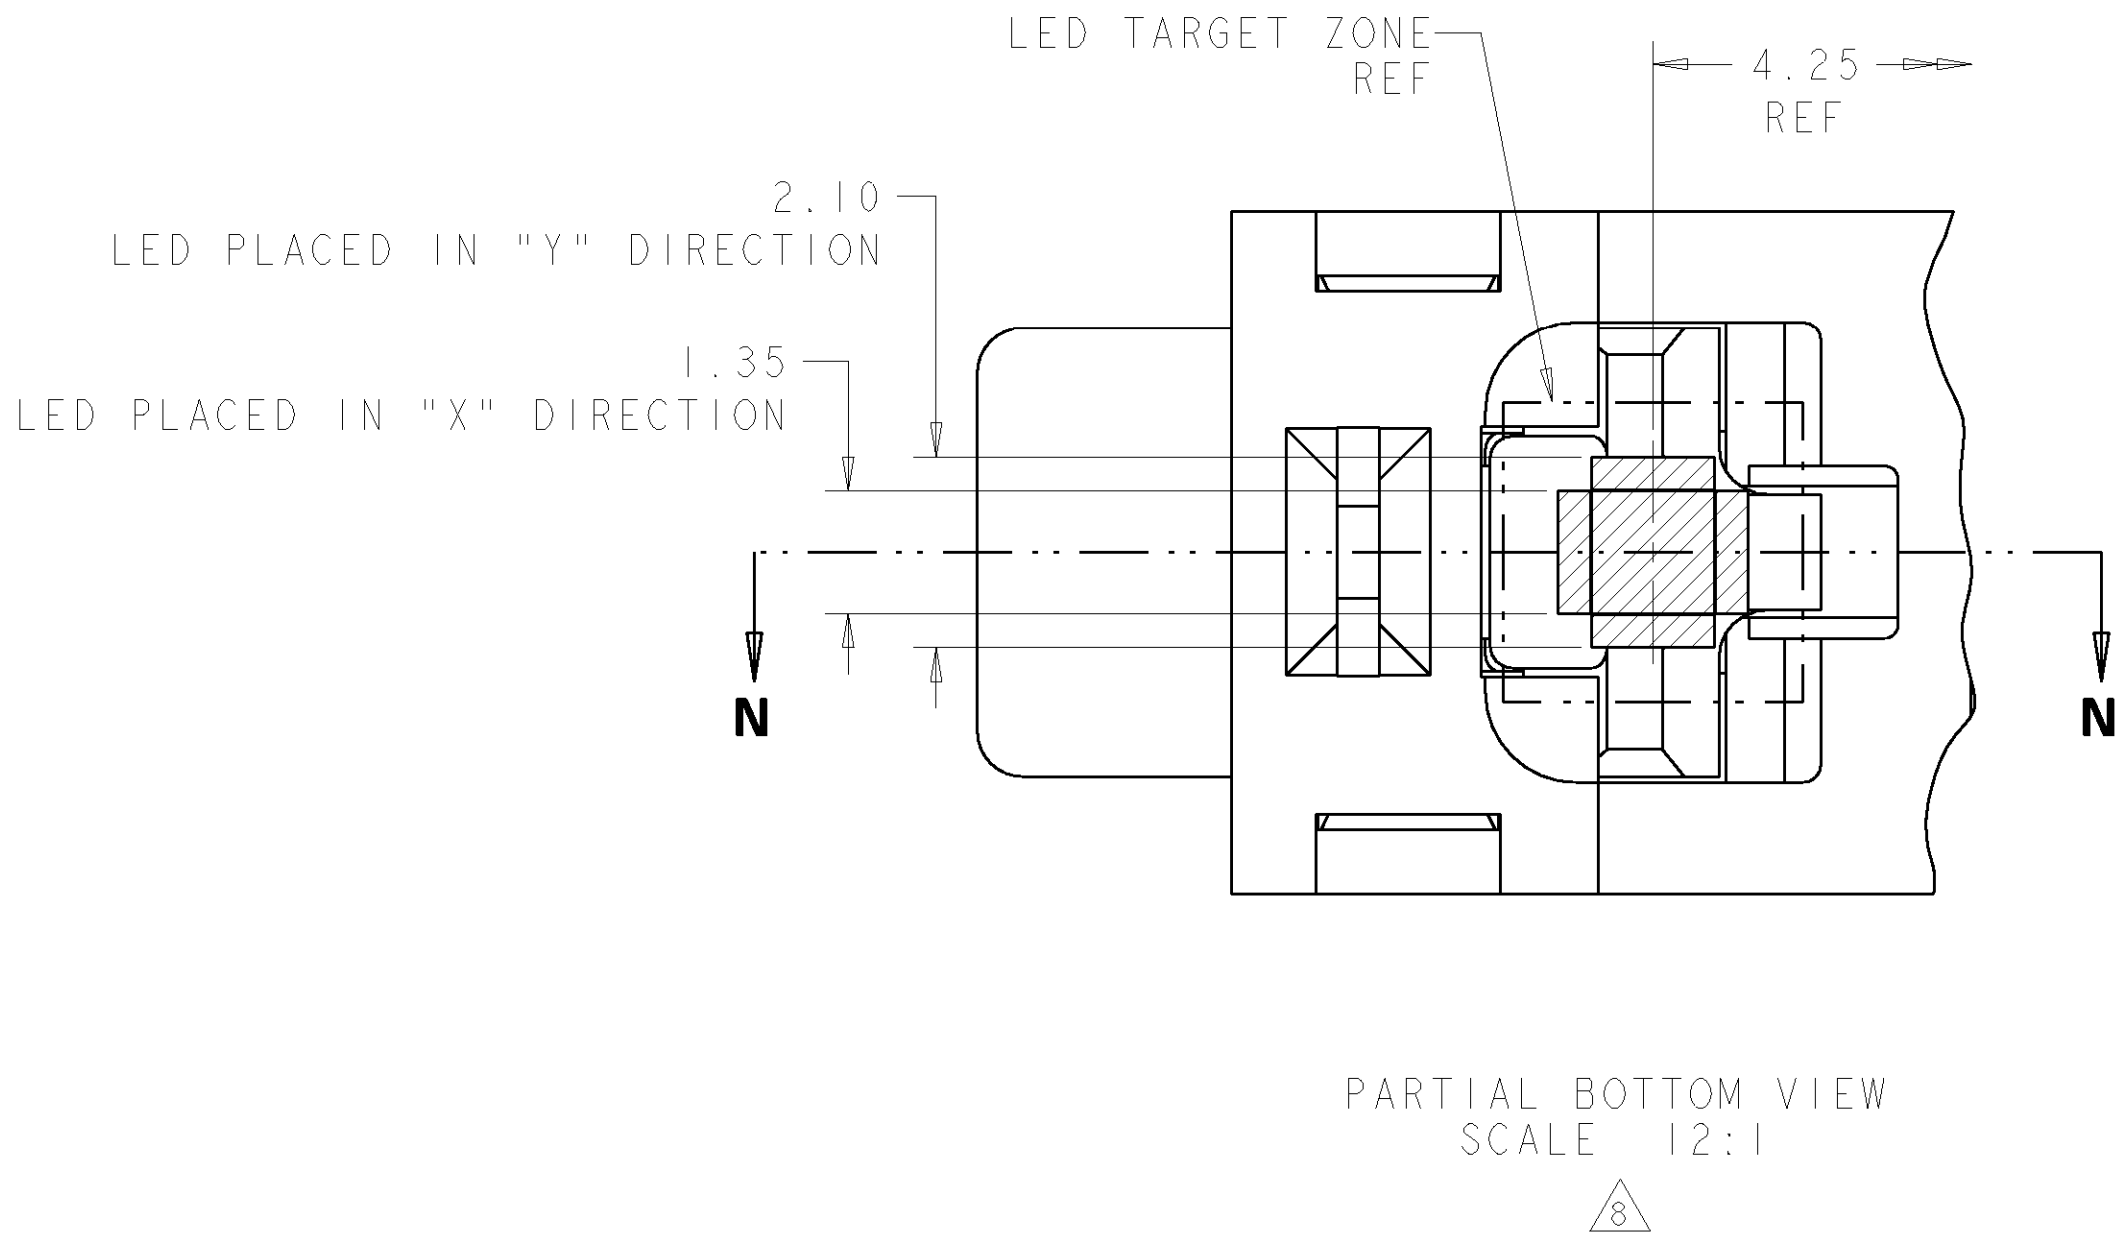

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE KEPT IN CONFIDENTIALITY AND NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT PERMISSION IN WRITING FROM TYCO ELECTRONICS CORPORATION, NO PART OF THIS DRAWING IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.										DWN	D. RINGLER	11FEB2004	tyco <i>Electronics</i>		Tyco Electronics Harrisburg, PA 17105-3608										
										CHK	M. CORRELL	18FEB2004													
										APVD	M. YEOMANS	20SEP2005	NAME		SOCKET ASSEMBLY, VERTICAL FB DIMM, SOLDER TAIL, 240 POSITION										
DIMENSIONS:										TOLERANCES UNLESS OTHERWISE SPECIFIED:															
mm										0 PLC ±.5															
										1 PLC ±0.13															
										2 PLC ±0.13															
										3 PLC ±0.013															
										4 PLC ±0.0001															
										ANGLES															
										FINISH															
MATERIAL										WEIGHT															
-										-															
										CUSTOMER DRAWING															
										SCALE		4:1		SHEET		2		OF		3		REV		B	

