

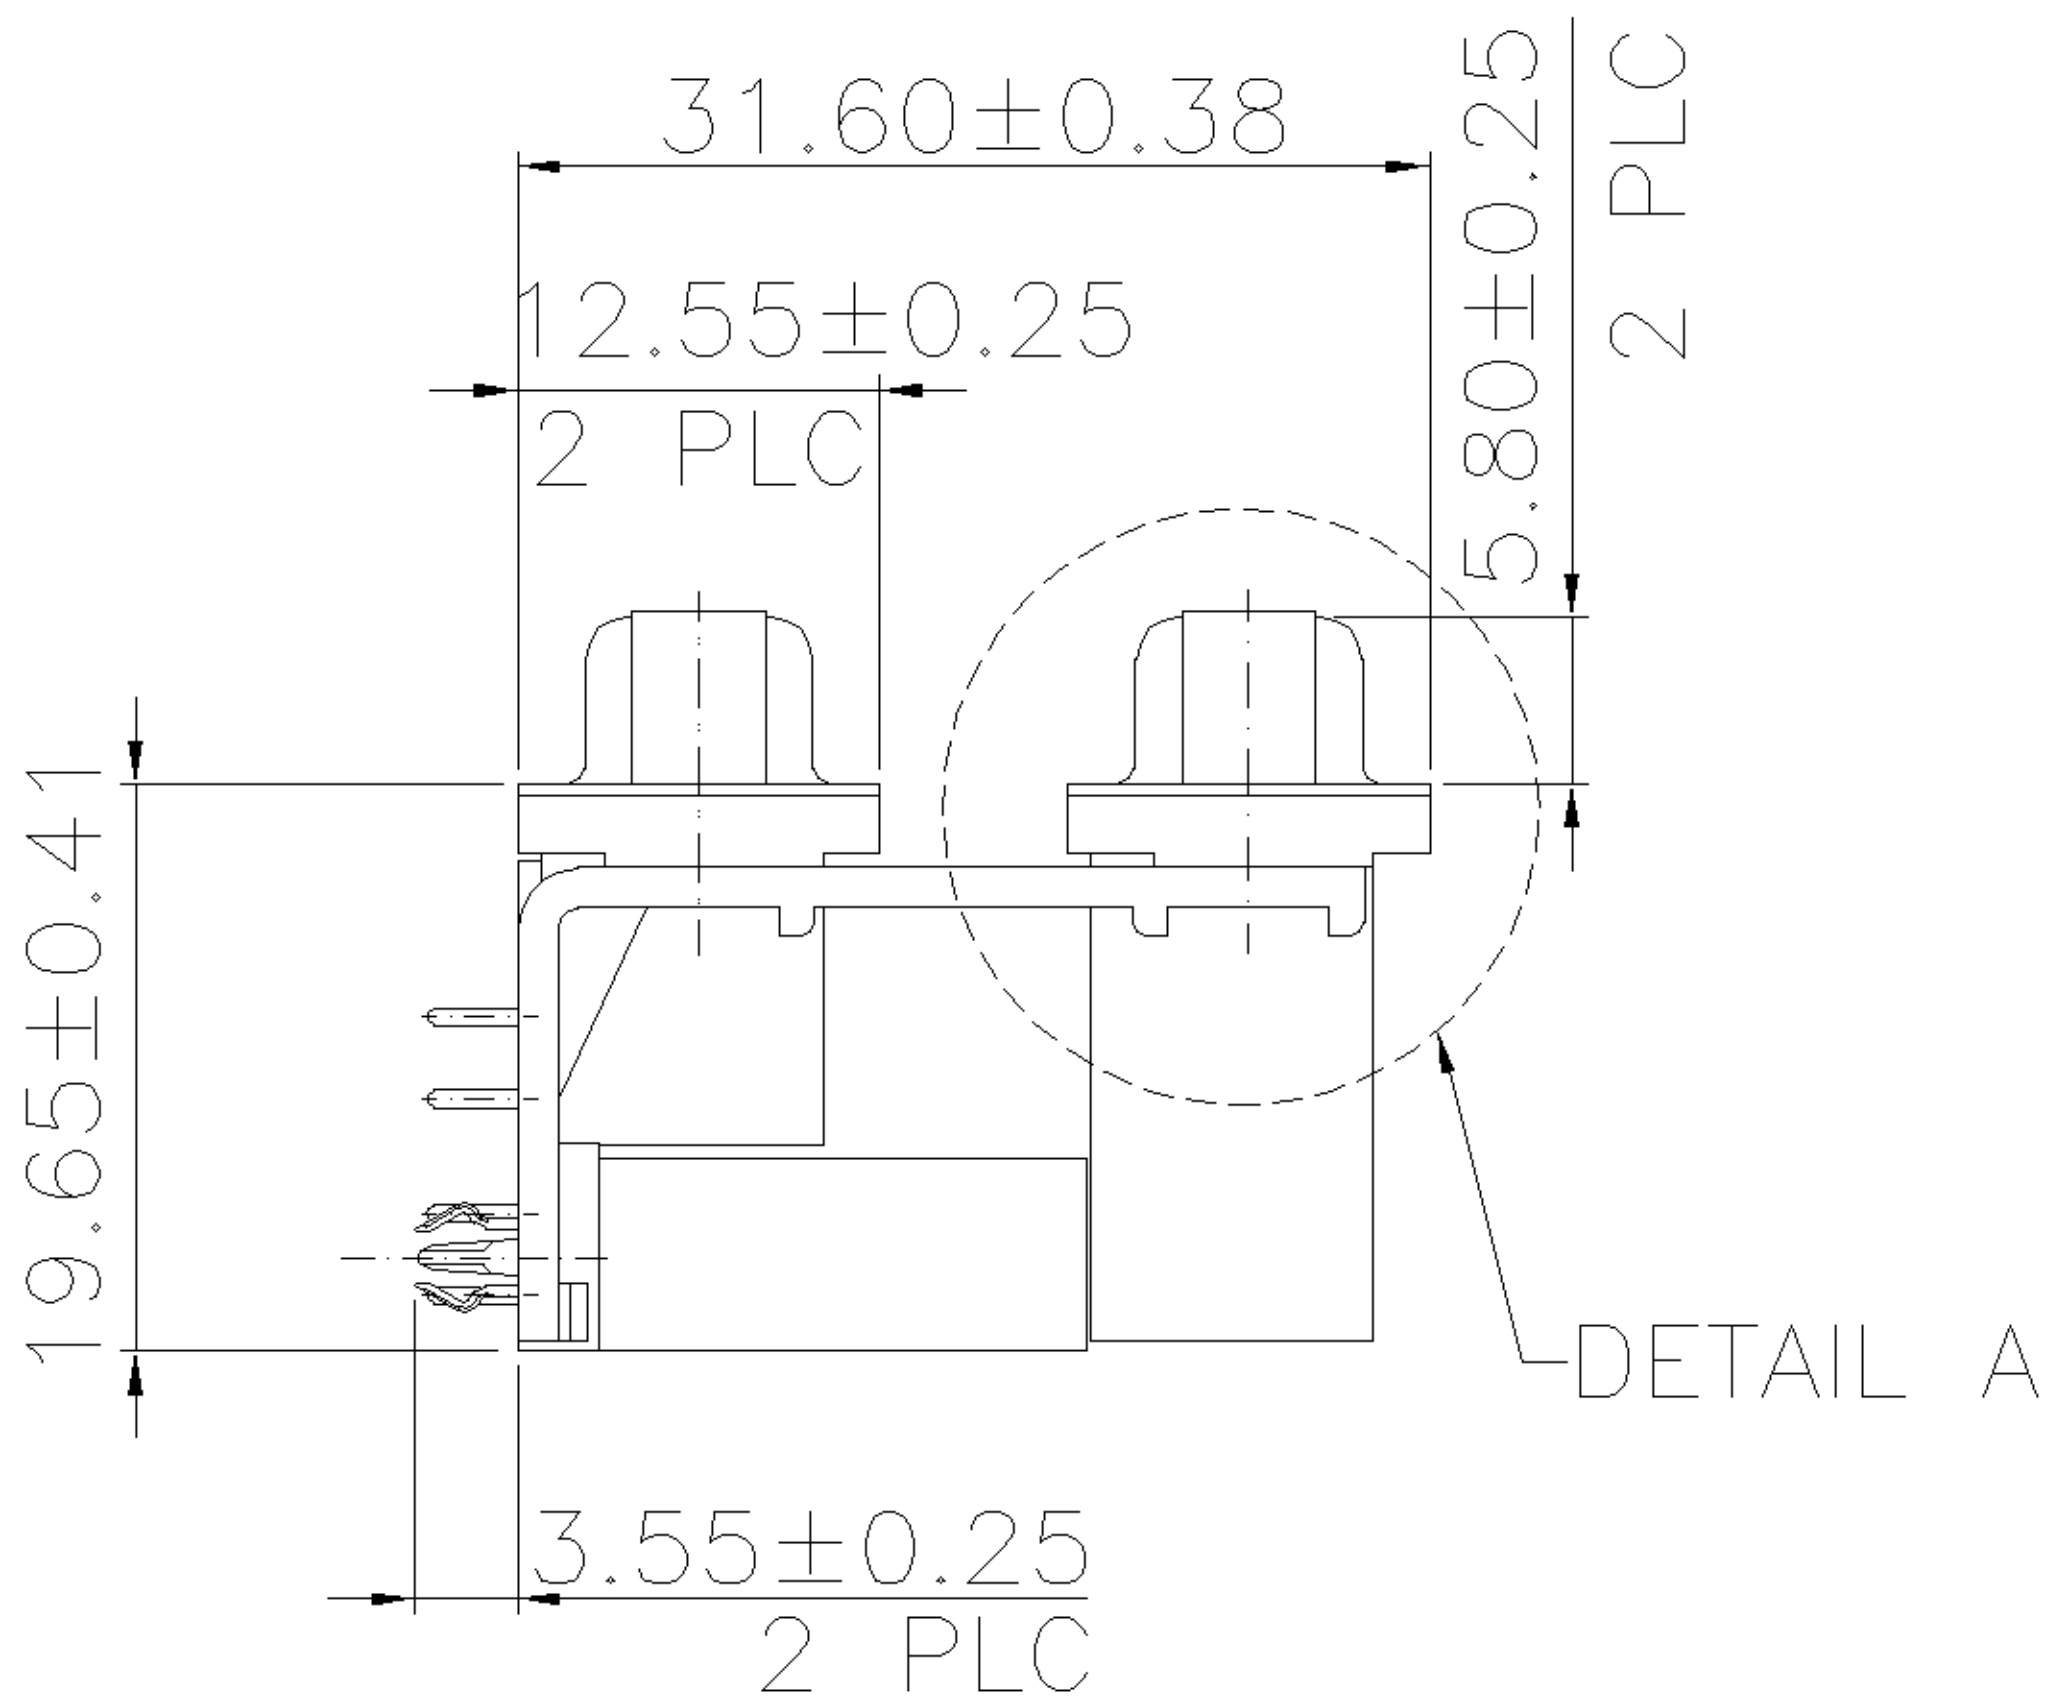
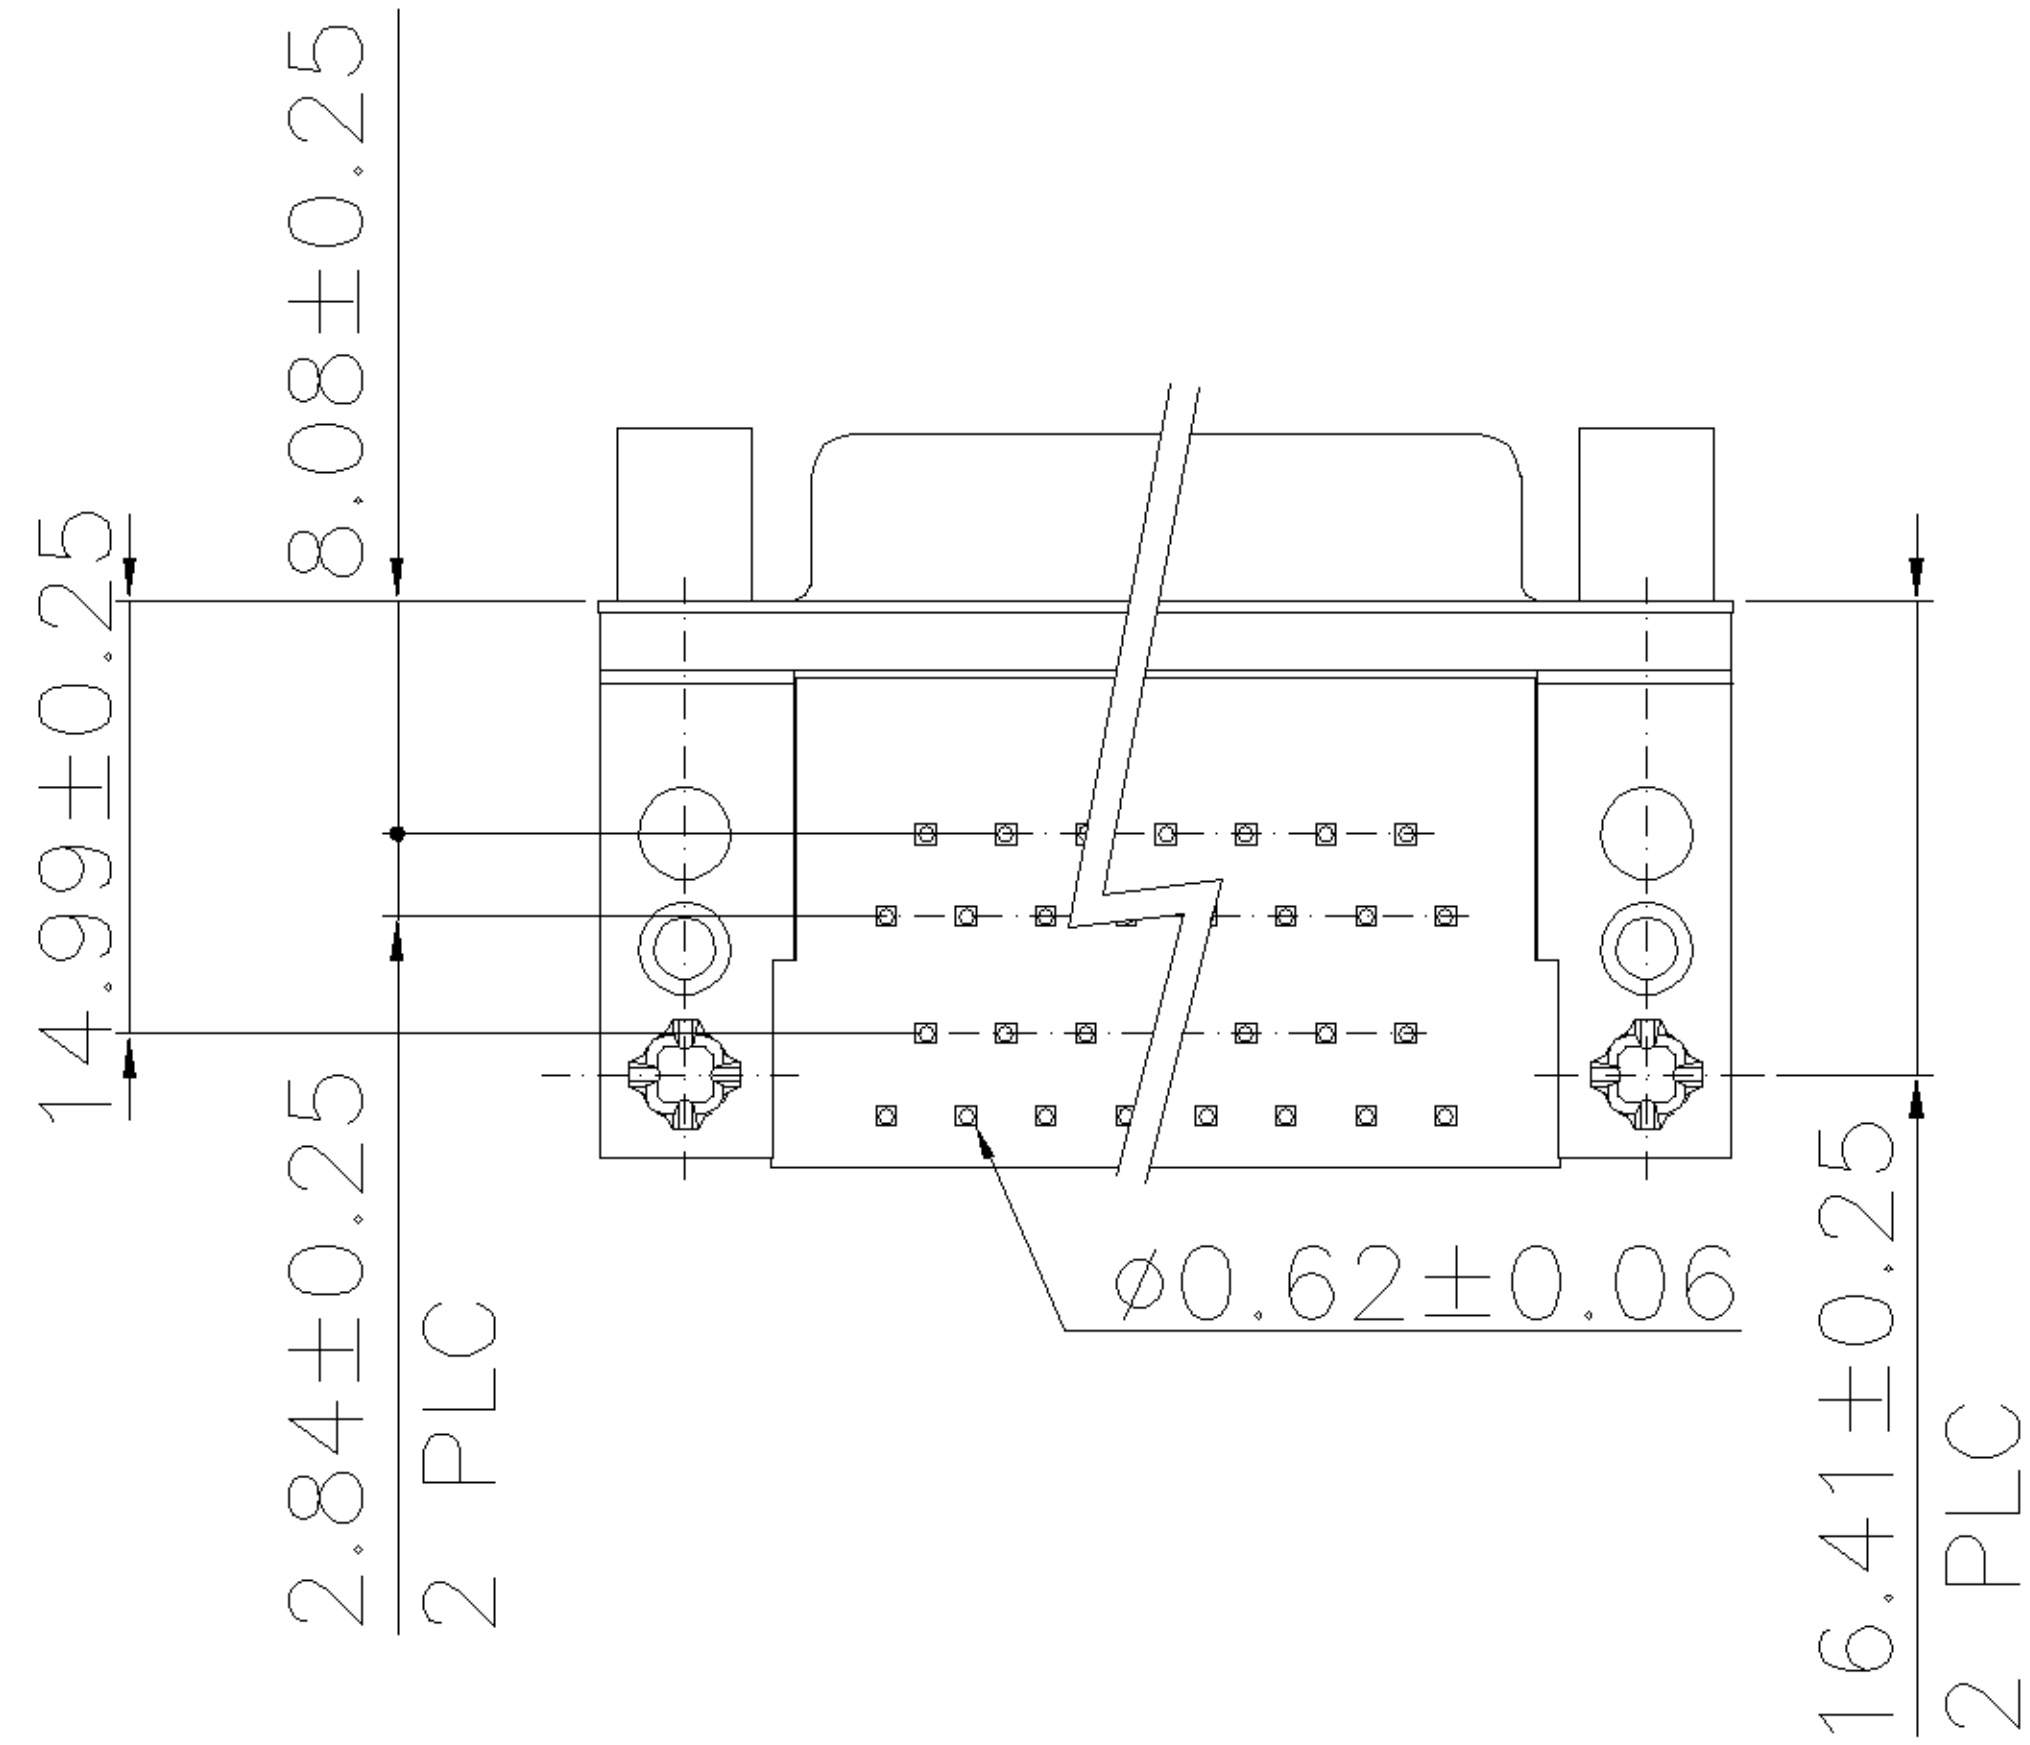


5-1734286-X	15-15	39.30	33.30	24.60	19.39	NY9T 
3-1734286-X	37-37	69.34	63.50	54.80	49.86	PBT 
2-1734286-X	25-25	53.10	47.04	38.30	33.24	
1-1734286-X	15-15	39.30	33.30	24.60	19.39	
1734286-X	9-9	30.95	24.99	16.20	11.08	HOUSING
PART NO.	PINS	A	B	C	D	

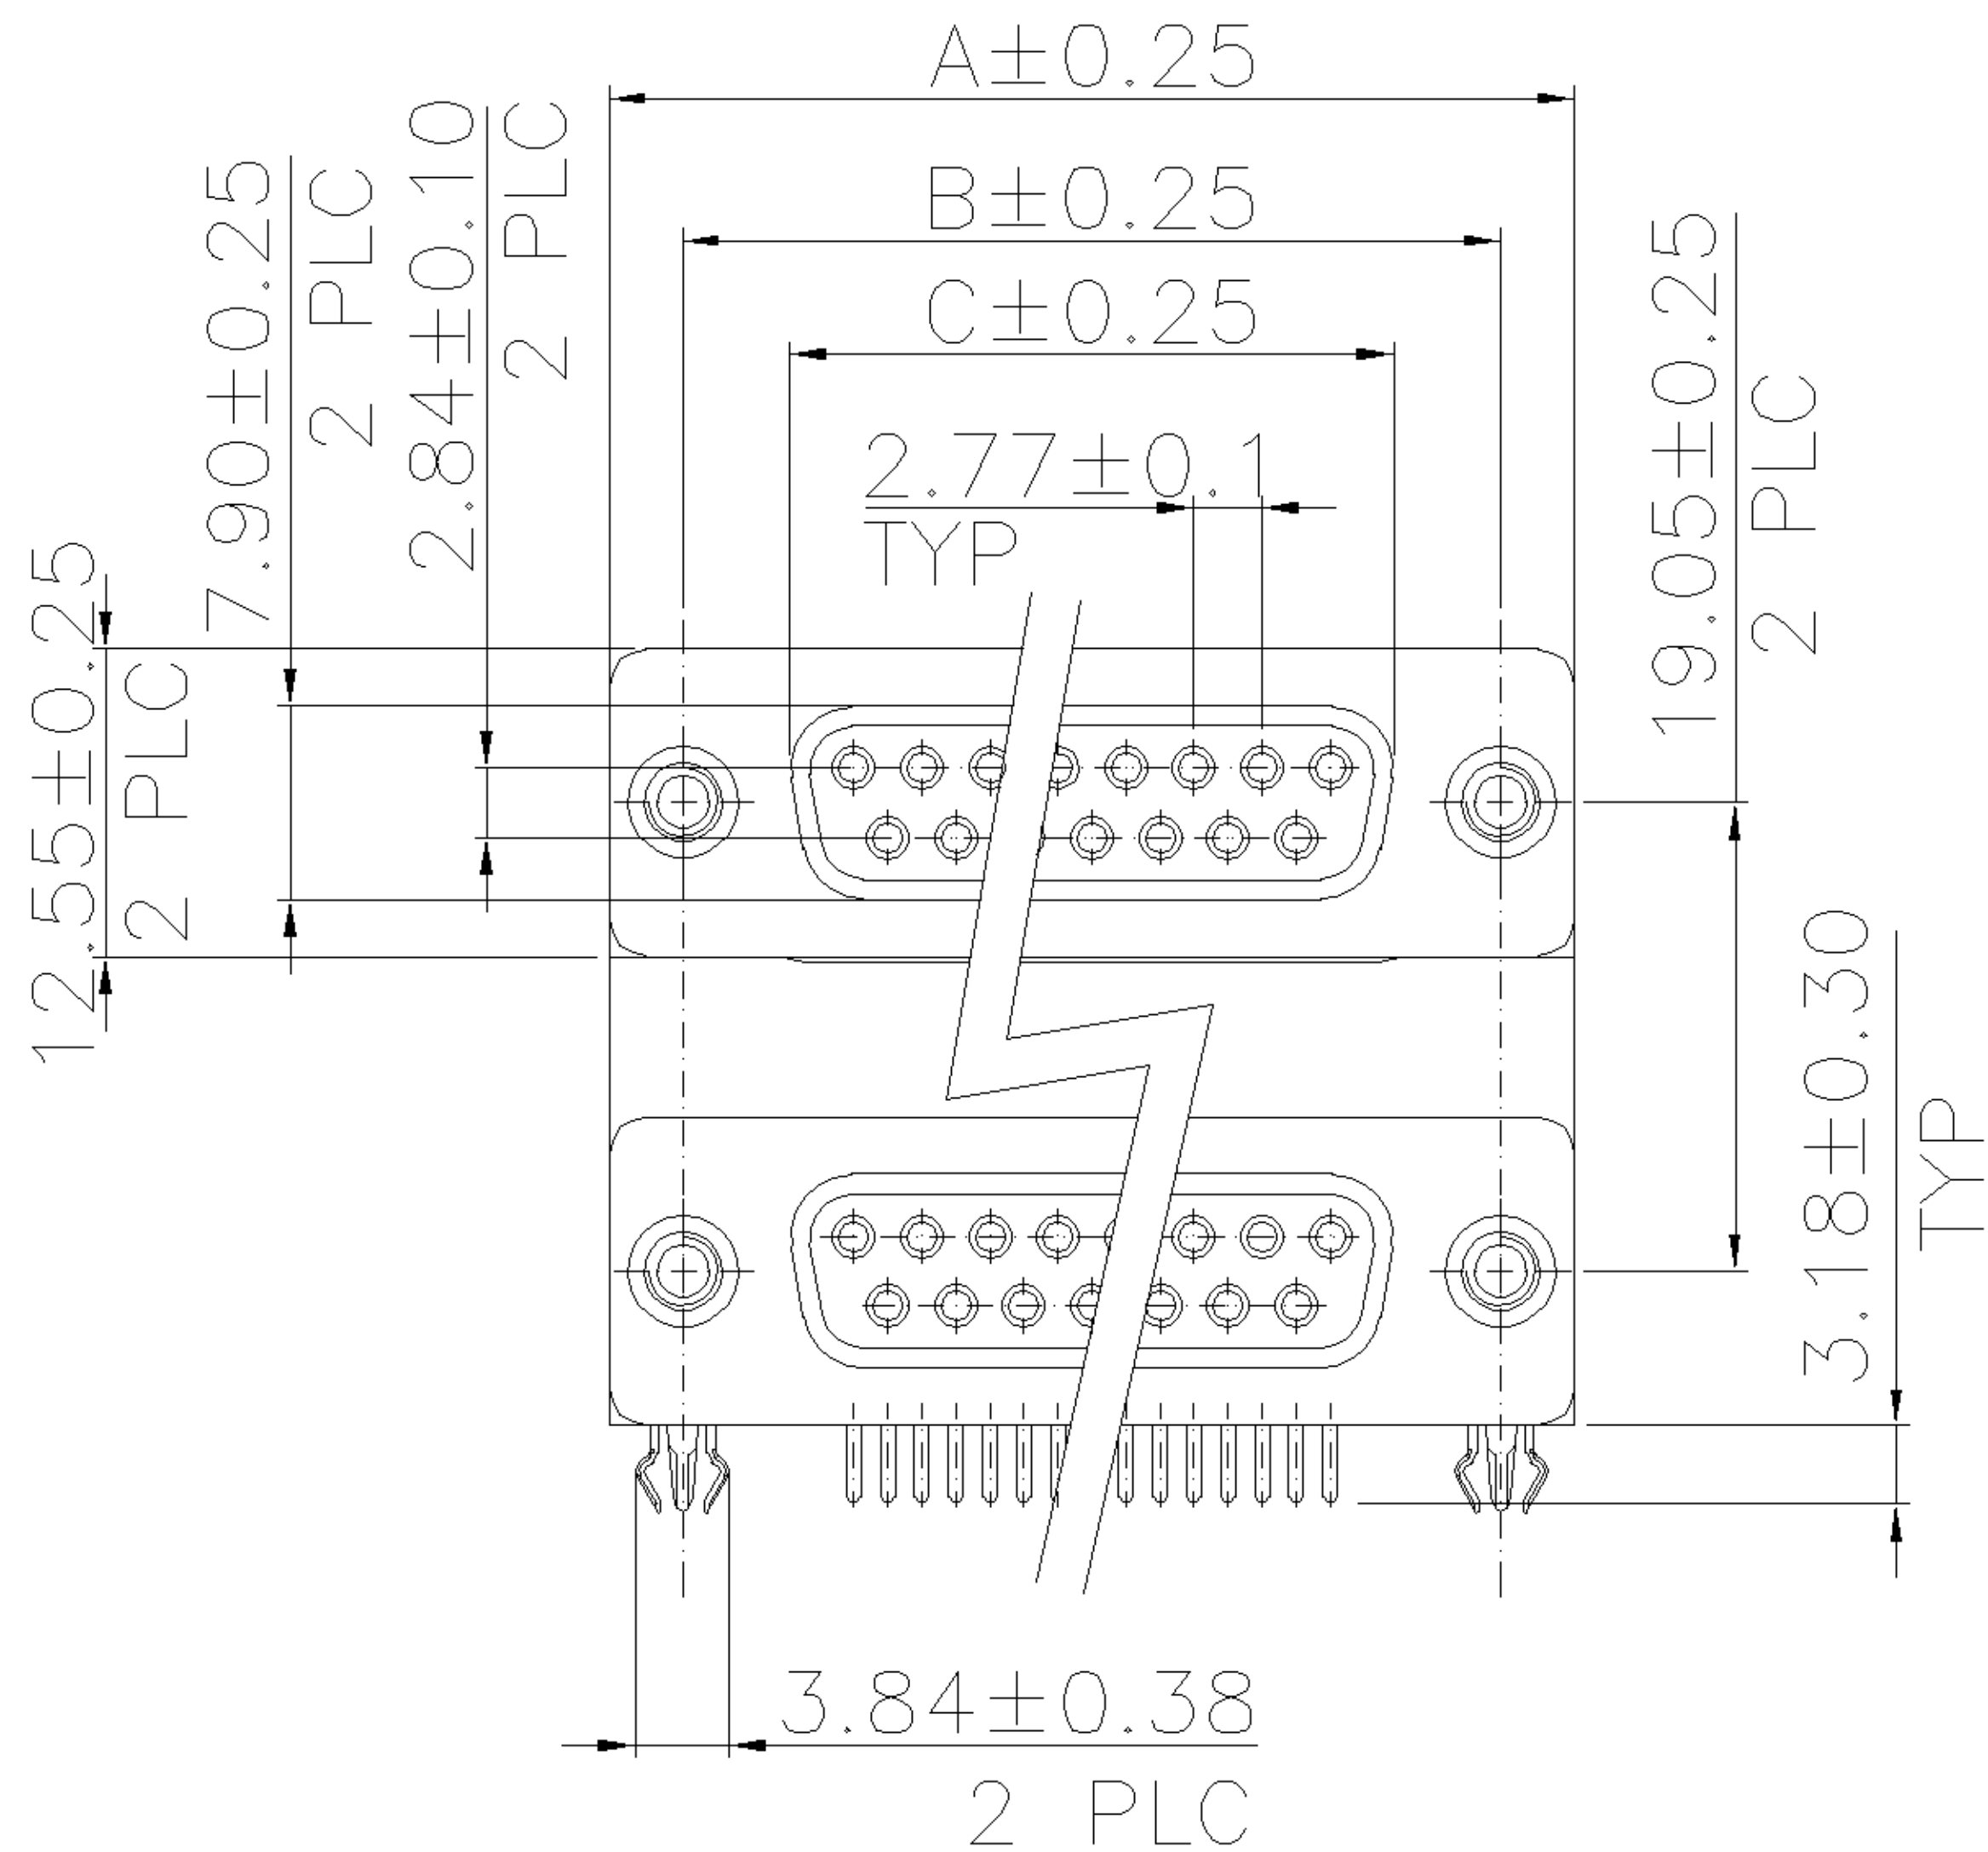


X-1734286-6	30 u"	PC99/ACTUAL COLOR	37-37
X-1734286-5	10 u"	PC99/ACTUAL COLOR	NOT AVAILABLE
X-1734286-4	GOLD FLASH	PC99/ACTUAL COLOR	
X-1734286-3	30 u"	BLACK	
X-1734286-2	10 u"	BLACK	
X-1734286-1	GOLD FLASH	BLACK	
PART NO.	GOLD PLATING	HSG COLOR	


A	REVISE MATERIAL	ECR-06-014922	JL SH	20-JUN 2006
O	NEW RELEASE	--	JL SH	28-DEC 2005
LTR	REVISION RECORD	ECN	DWN CHK	DATE

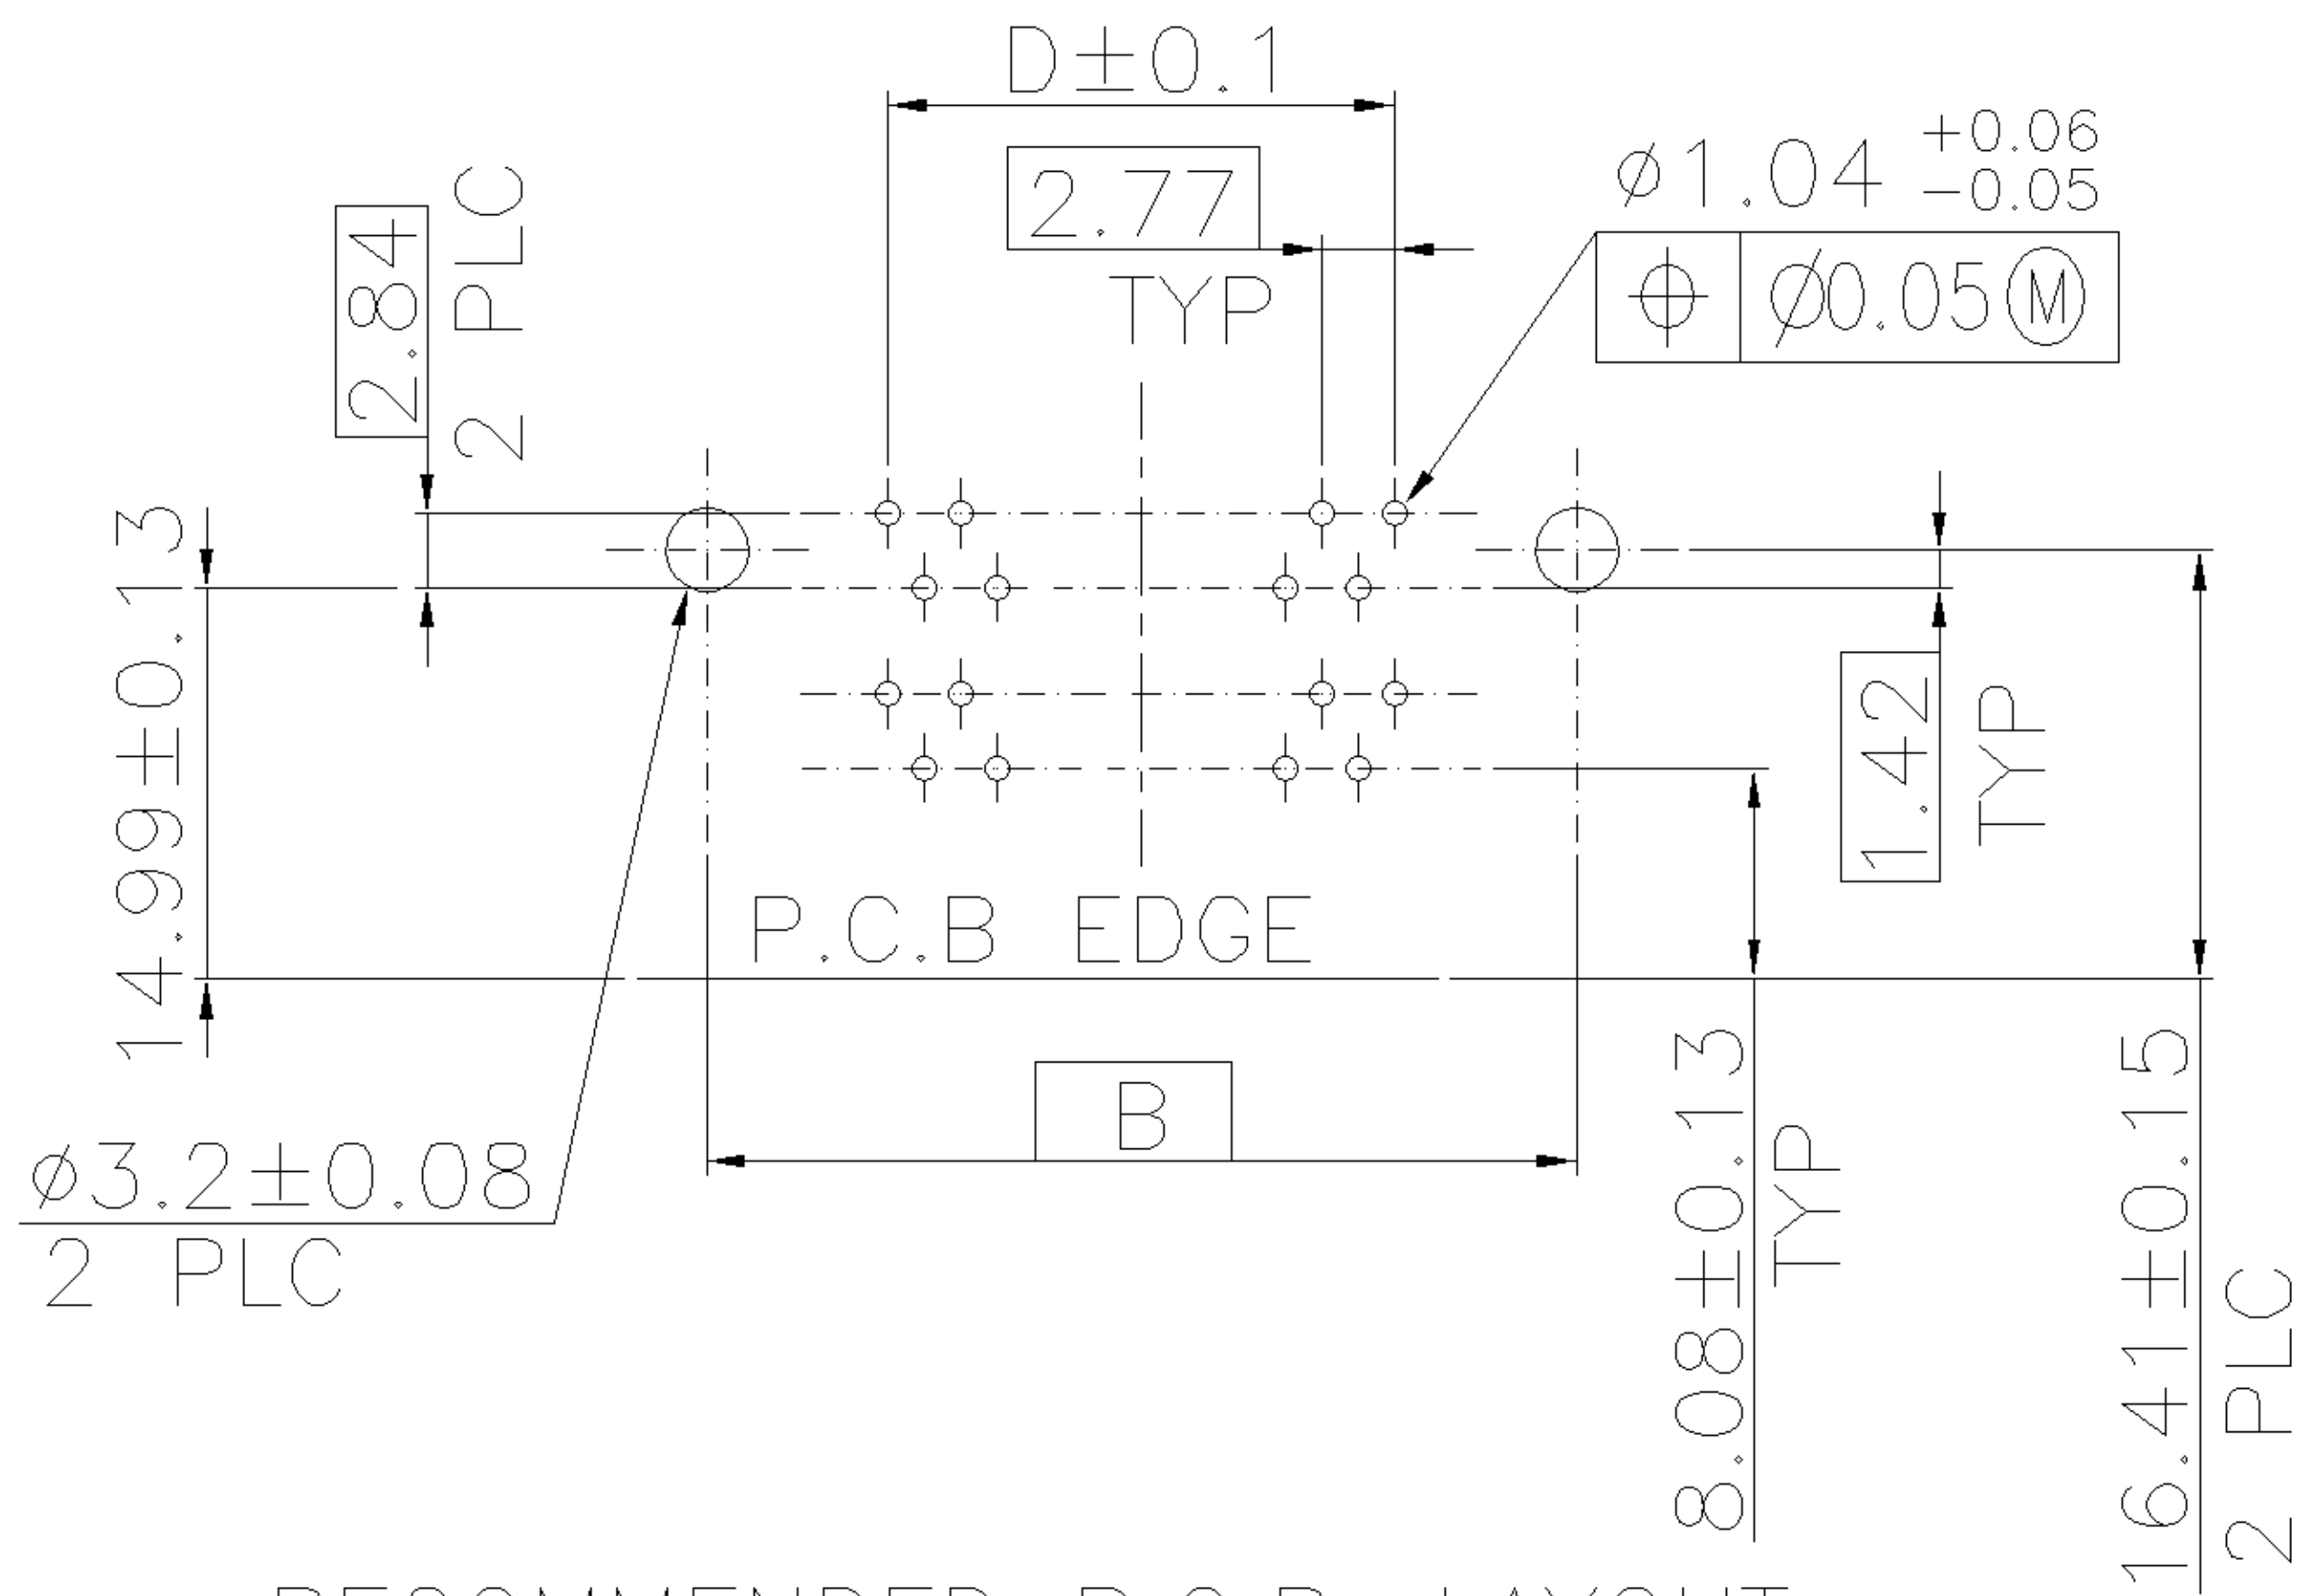

RECOMMENDED P.C.B. LAYOUT

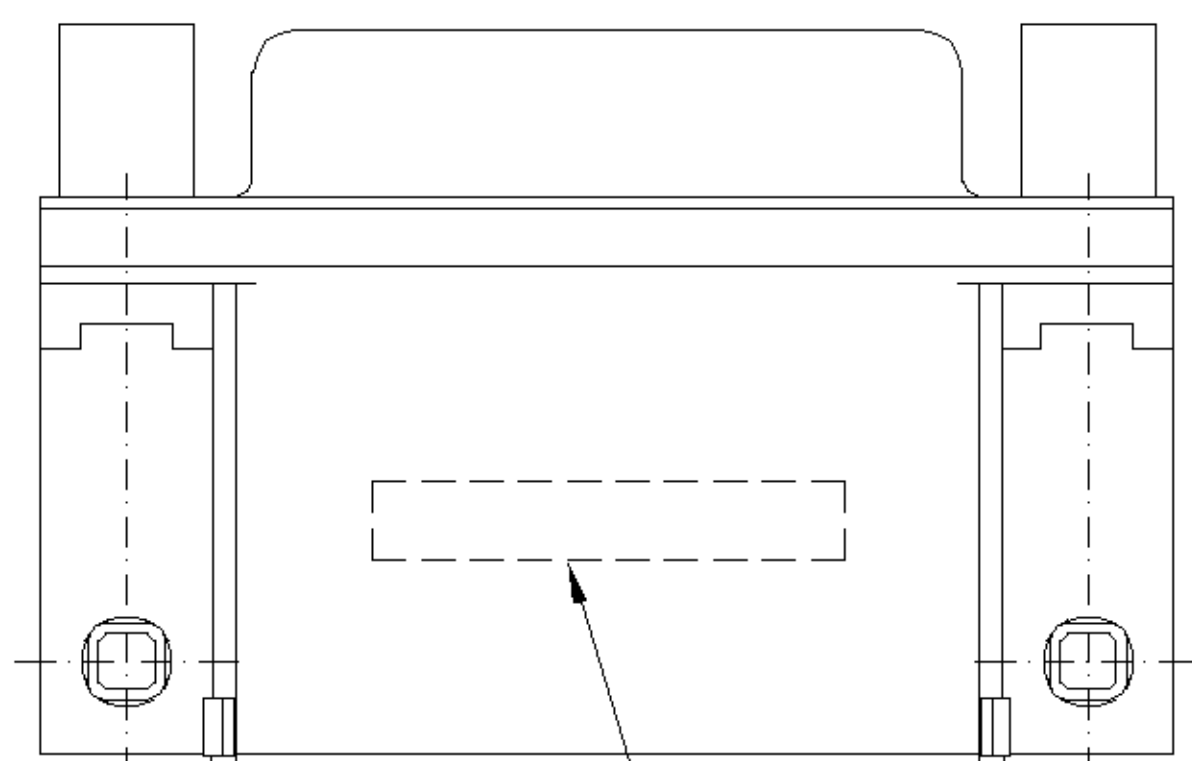


AMP LOGO &
DATE CODE

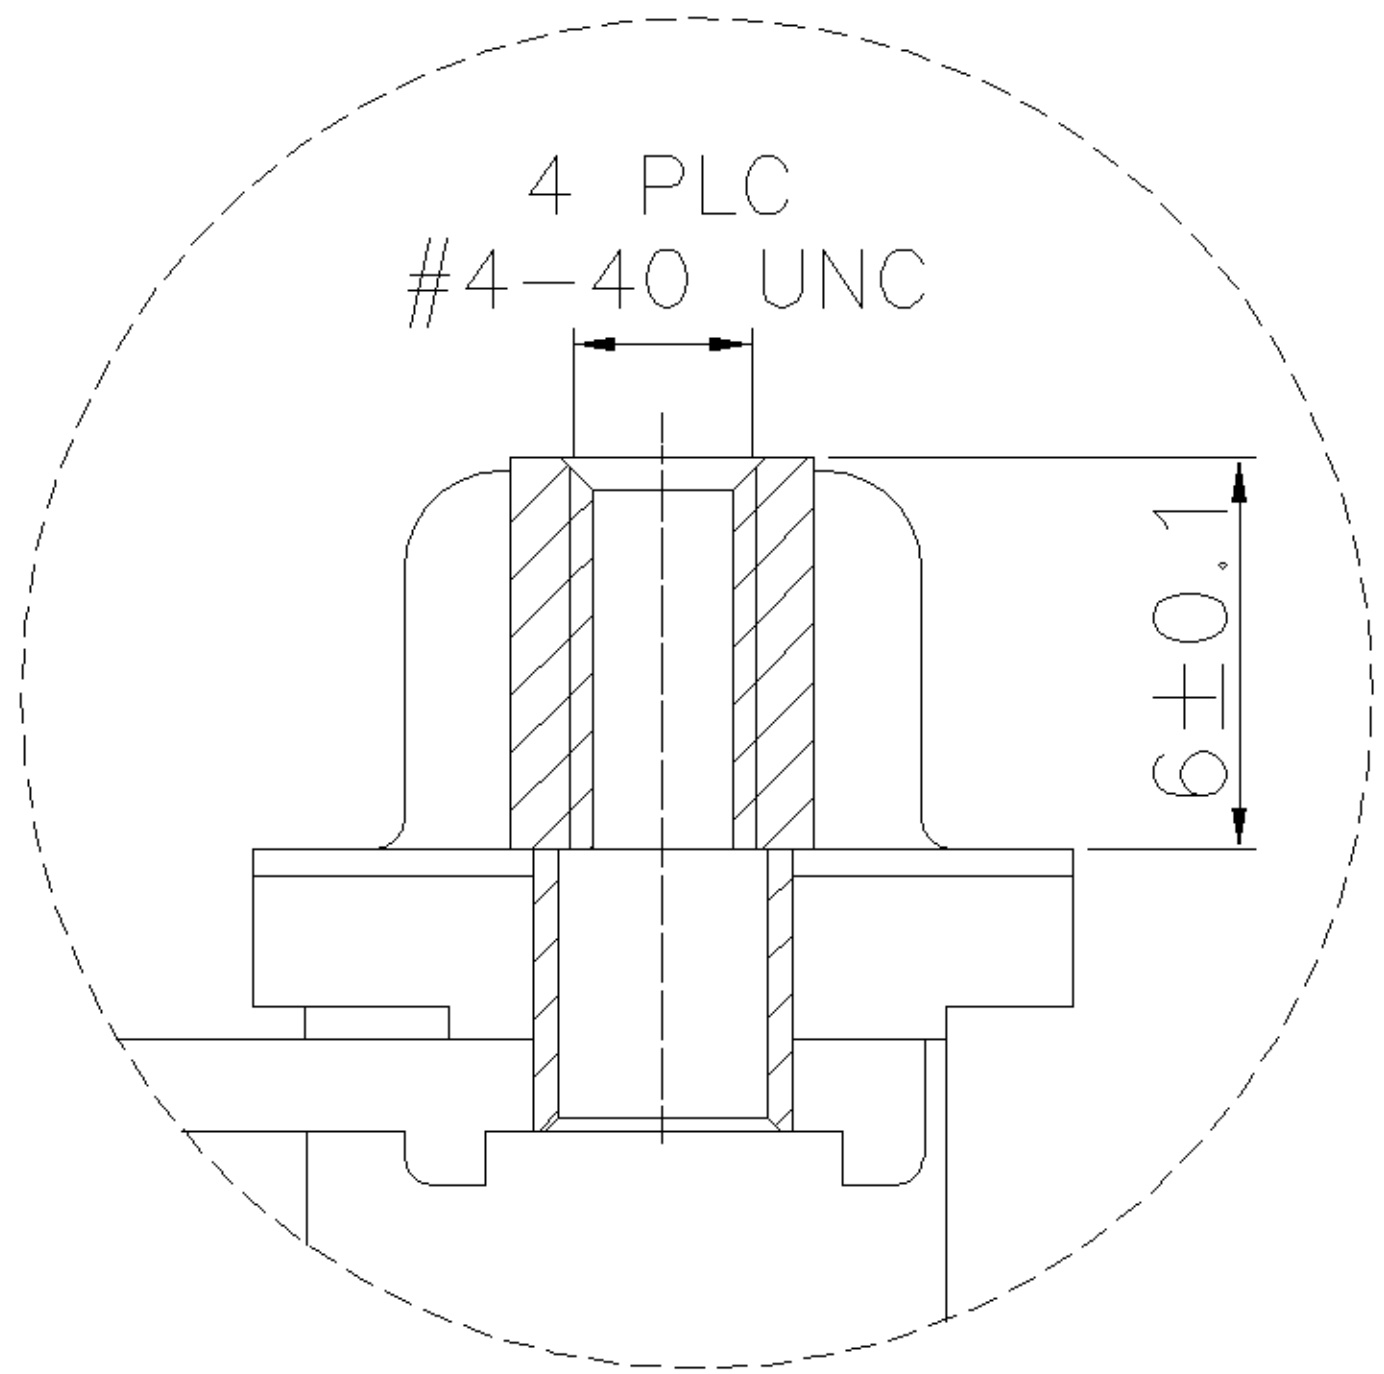

DETAIL A


- NOTES:
- MATERIAL:
HOUSING: THERMOPLASTIC(SEE TABLE), UL94V-0;
COLOR: SEE TABLE.
CONTACTS: COPPER ALLOY
BOARDLOCK: COPPER ALLOY
BRACKET: ZINC ALLOY
SHELL: STEEL
 - FINISH:
CONTACT:
GOLD PLATING (SEE TABLE) ON CONTACT AREA.
100u" MIN. BRIGHT TIN PLATING ON SOLDER TAIL AREA,
50u" MIN. NICKEL UNDERPLATING OVERALL.
BOARDLOCK:
60u" MIN. BRIGHT TIN PLATING OVERALL.
SHELL:
60u" MIN. BRIGHT TIN PLATING OVERALL.
 -  WAVE SOLDER CAPABLE TO 265°C
PER TYCO SPEC. 109-202, CONDITION B.
 -  REFLOW SOLDER CAPABLE TO 260°C
PER TYCO SPEC. 109-201, CONDITION B.
 - CHOOSE PRE-FIX FROM LEFT TABLE AND SUFFIX FROM
RIGHT TABLE FOR DESIRED PART NUMBER COMBINATION.

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 0.5 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 ANGLES ± 3°	DWN J. LEE 20-JUN-2006 CHK S. HOU 20-JUN-2006 APVD W.J. KE 20-JUN-2006 PRODUCT SPEC 108-57517 QUALIFICATION TEST REPORT 501-57590 WEIGHT	 TYCO HOLDINGS (BERMUDA) VII LTD. TAIWAN BRANCH NAME D-SUB STACKED RCPT. OVER RCPT. R/A TYPE, WITH #4-40 SCREWLOCK LOC DW A SIZE A3 DRAWING NO C-1734286 REV A
		SCALE -- SHEET 1 OF 2

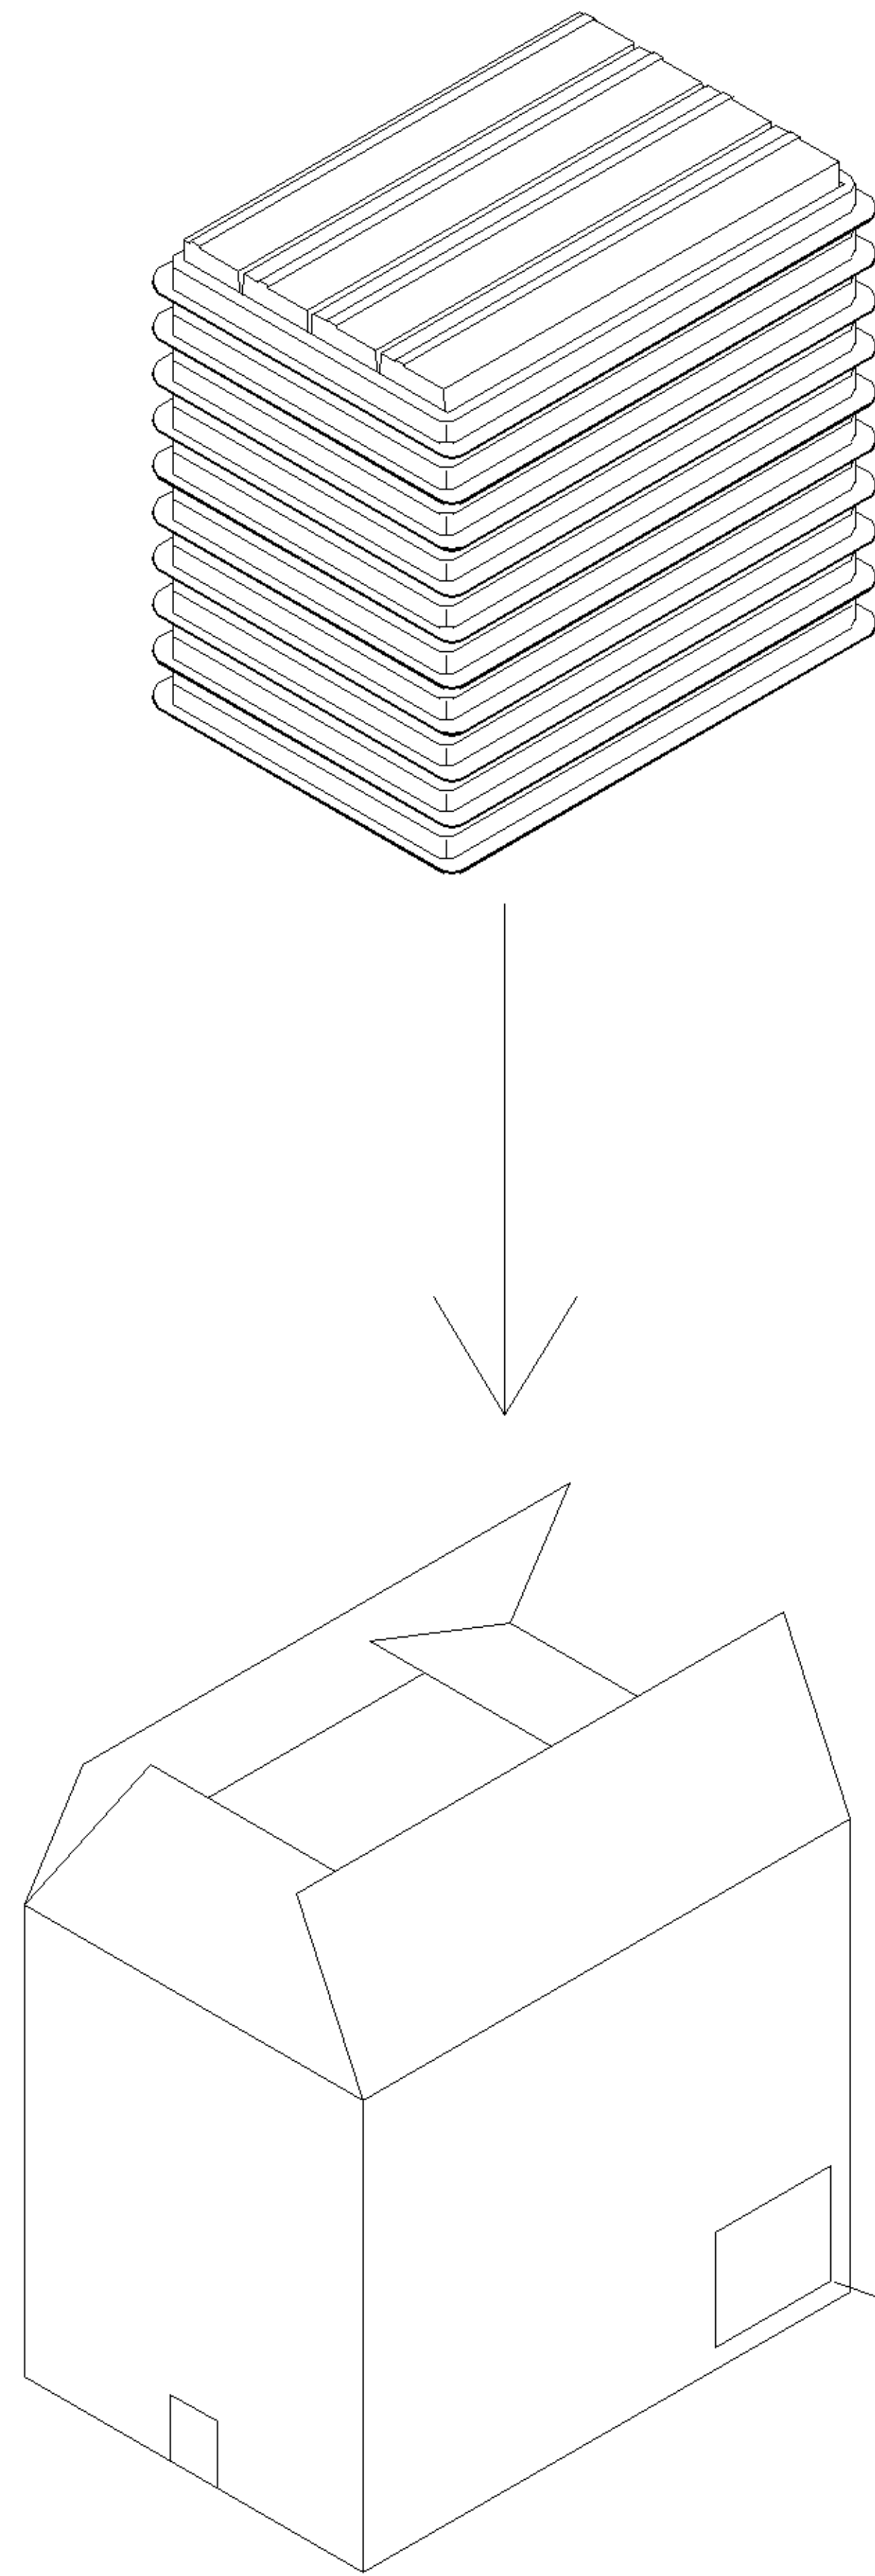

CARTON

LABEL

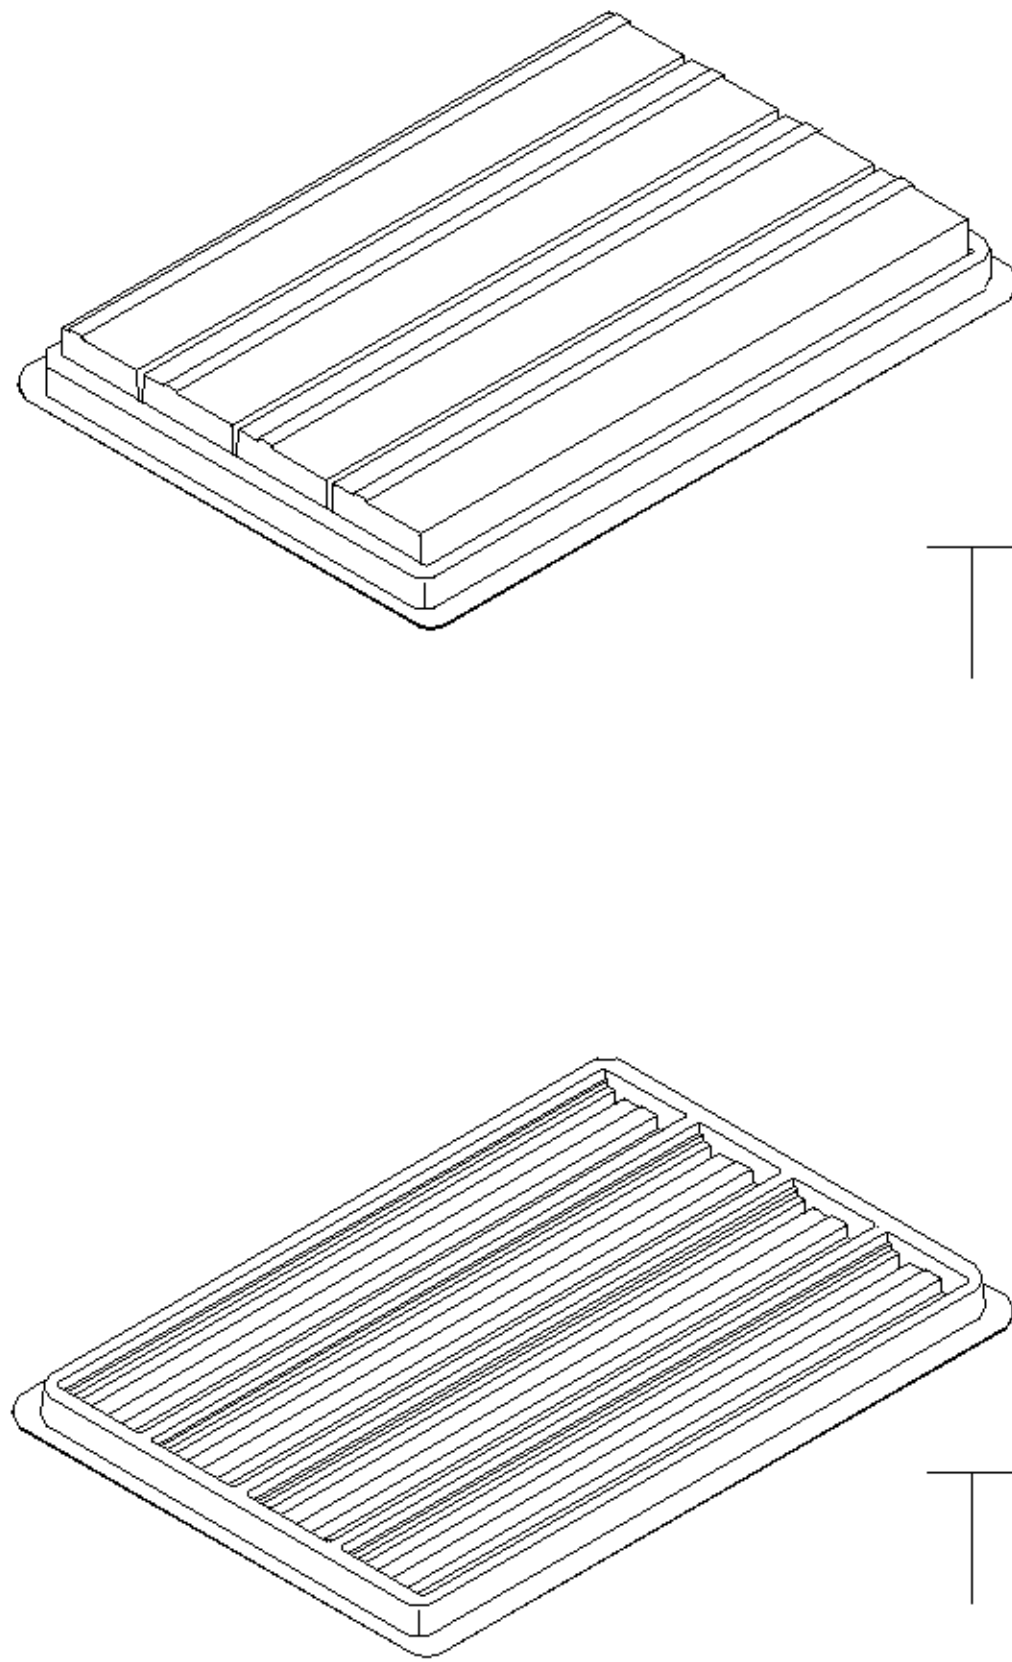


TOP COVER

TRAY

- NOTE :
- DIMENSION :
TRAY : L=315, W=215, H=30
CARTON : L=335, W=230, H=280
 - TRAY : PS or PET
 - QUANTITY:

PIN NO.	9-9	15-15	25-25	37-37
PCS/TRAY	36	28	20	16
TRAY/CARTON	10	10	10	10
PCS/CARTON	360	280	200	160
NET WEIGHT	10.33	10.0	9.85	10.57
GROSS WEIGHT	11.75	11.25	11.28	11.73

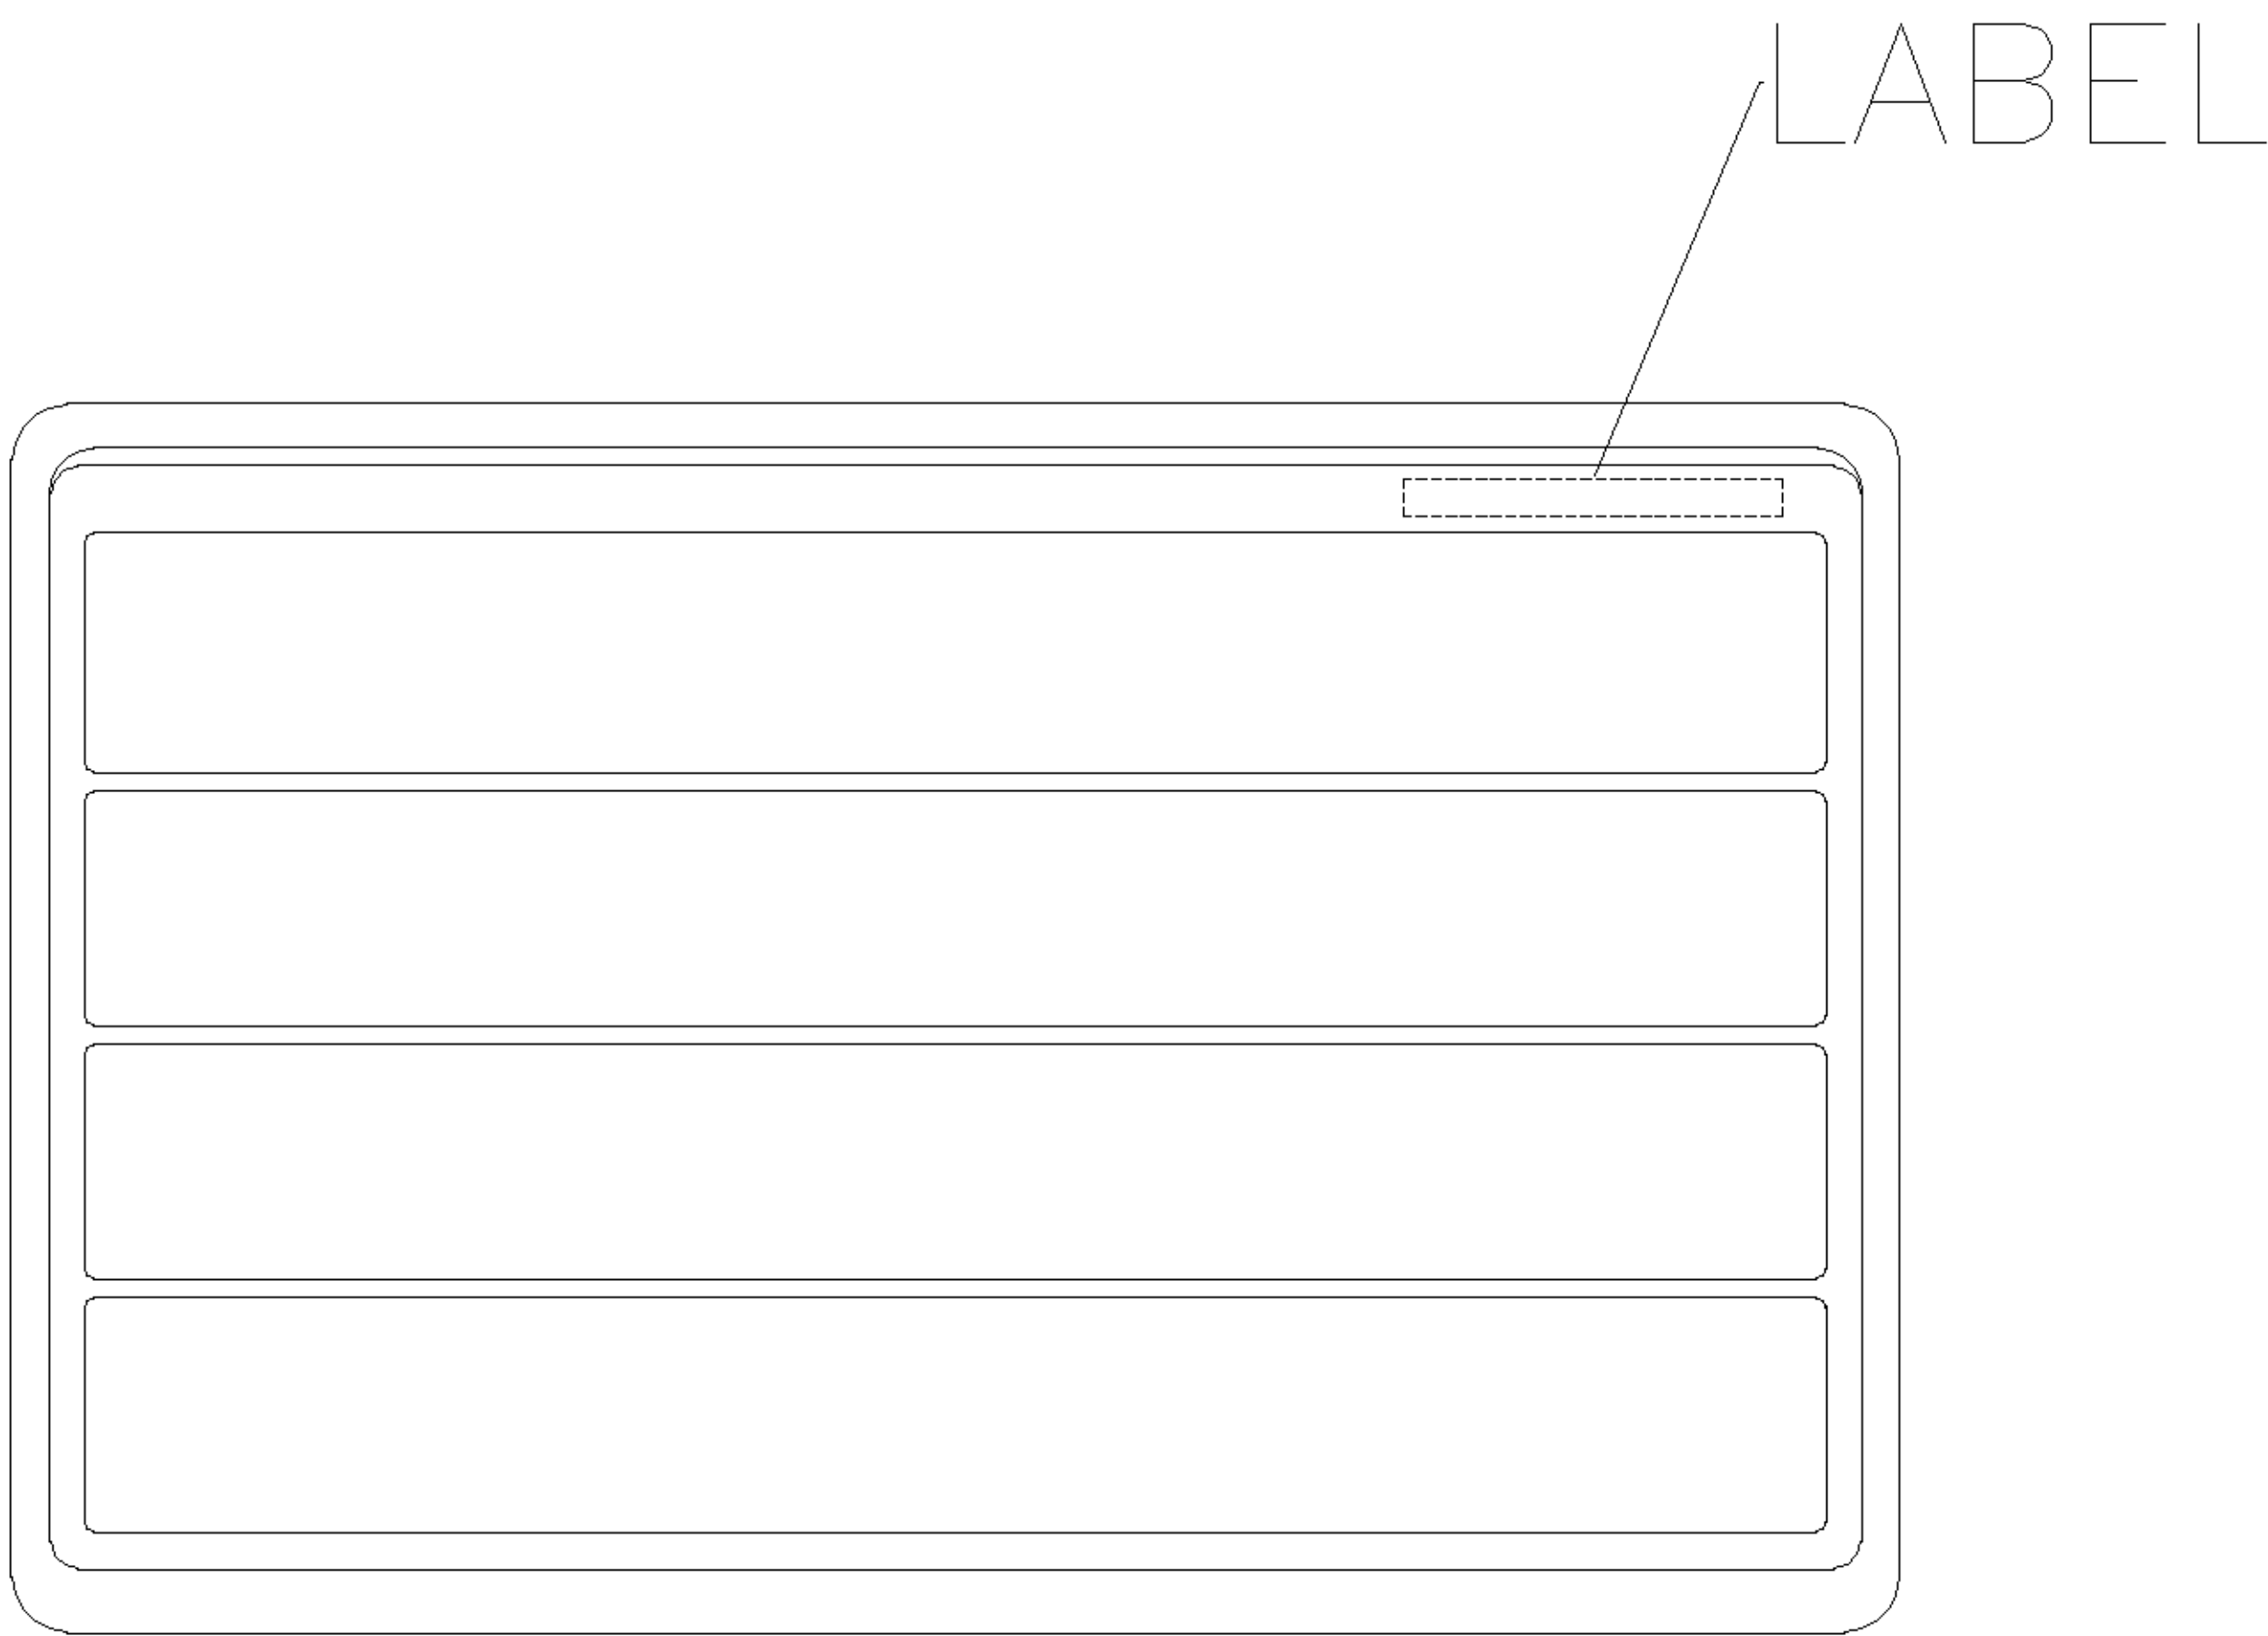

TRAY LAYOUT

	SEE SHEET 1			
LTR	REVISION RECORD	ECN	DWN CHK	DATE

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± ANGLES ±		DWN J. LEE 20-JUN-2006	tyco Electronics TYCO HOLDINGS (BERMUDA) VII LTD. TAIWAN BRANCH	
MATERIAL SEE NOTE		CHK S. HOU 20-JUN-2006		
FINISH SEE NOTE		APVD W.J. KE 20-JUN-2006	NAME D-SUB STACKED RCPT. OVER RCPT. R/A TYPE, WITH #4-40 SCREWLOCK	
		PRODUCT SPEC -	LOC DW	SIZE A ₃
		QUALIFICATION TEST REPORT -	DRAWING NO C-1734286	
		WEIGHT	SCALE --	REV A
			SHEET 2 OF 2	