

# Banana Plug - Uninsulated Rivet Type

## SPECIFICATIONS

**Plug Body:** Brass per QQ-B-626D

**Plug Spring:** Beryllium copper per QQ-C-533

**Finish:** Silver

**Panel Thickness:** Up to .156 (4.00)


## RATINGS

**Current:** 15 amps

**Contact Resistance:** 0.010 ohms maximum



|                       |
|-----------------------|
| <b>SILVER PLATING</b> |
| 108-0754-001          |

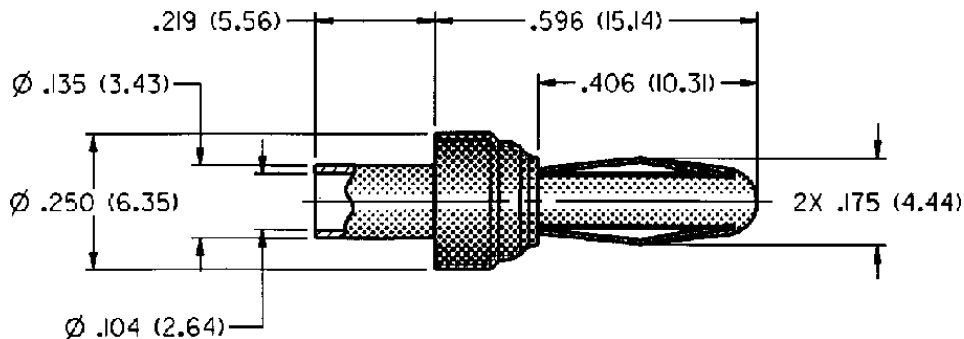

**For Standard Banana Jack: .166 (4.23) Diameter**

## FEATURES:

- Shorter spring adapts to standard jack or special size jack
- Ideal for limited space applications