



LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	OWN	APVD
—	—	—	—	—	—

1.0 PERFORMANCE

- 1.1 TEMPERATURE RANGE:-65°C TO +165°C
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 DURABILITY: 500 matings
- 1.4 D.W.V.:1000VRMS MAX.
- 1.5 CONTACT CAPTIVATION:6 LBS
- 1.6 MATING TORQUE:7 TO 10 POUND INCHES

2.0 MATERIALS

- 2.1 DIELECTRIC: PTFE
- 2.2 CENTER CONTACT: BeCu
- 2.3 BODY: BRASS
- 3.0 FINISHES
- 3.1 CENTER CONTACT: GOLD PLATED
- 3.2 BODY: GOLD PLATED
- 4.0 THE CONNECTOR IS ROHS COMPLIANT.

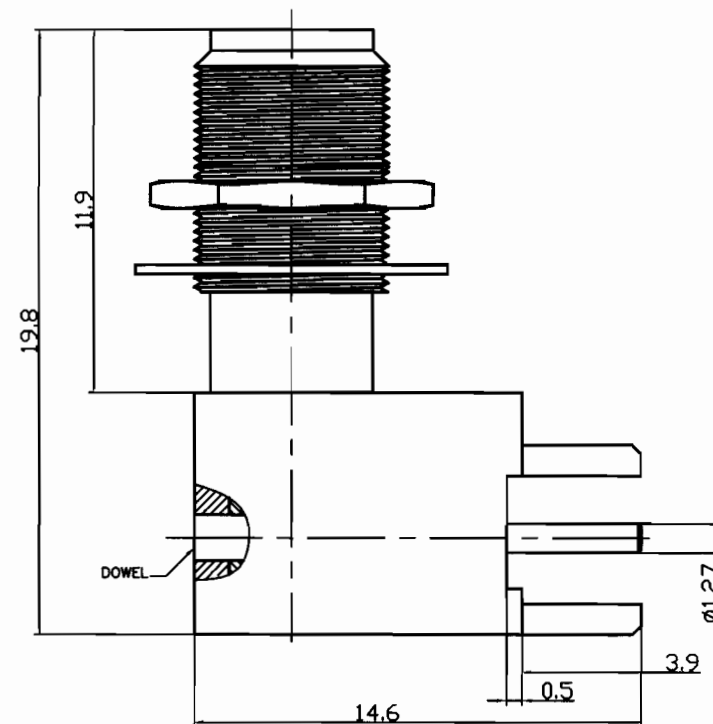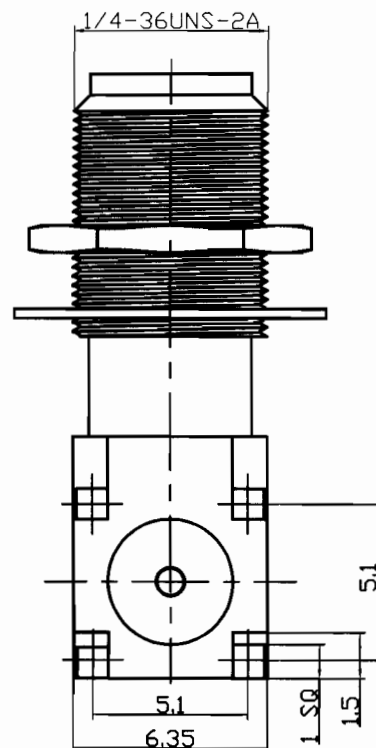

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN Rebecca 21-12-2011		SHANGHAI SHIDI TECHNOLOGY INC.	
DIMENSIONS: MM		CHK David 21-12-2011			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD —		NAME SMA RIGHT ANGLE JACK-50 OHM	
0 PLC ± —		PRODUCT SPEC —		SIZE A3	
1 PLC ± 0.25		APPLICATION SPEC —		CAGE CODE —	
2 PLC ± 0.15		WEIGHT —		DRAWING NO C-22335-0A	
3 PLC ± —		RESTRICTED TO —		SCALE —	
4 PLC ± —		SHEET 1 OF 1		REV 0	
ANGLES ± —					
MATERIAL —					
FINISH —					