

LOC		DIST		P		LIR		DESCRIPTION		DATE		DWG		APPD	
-		-		-		-		-		-		-		-	


REVISIONS

1.0 PERFORMANCE

- 1.1 FREQUENCY RANGE: DC-6GHZ
- 1.2 TEMPERATURE RANGE:-65°C TO +165°C
- 1.3 NOMINAL IMPEDANCE: 50 OHMS
- 1.4 DURABILITY: 500 matings

2.0 MATERIALS

- 2.1 DIELECTRIC: PTFE
- 2.2 CENTER CONTACT: BeCu
- 2.3 BODY: BRASS
- 3.0 FINISHES
- 3.1 CENTER CONTACT: GOLD PLATED
- 3.2 BODY: GOLD PLATED
- 4.0 THE CONNECTOR IS ROHS COMPLIANT.

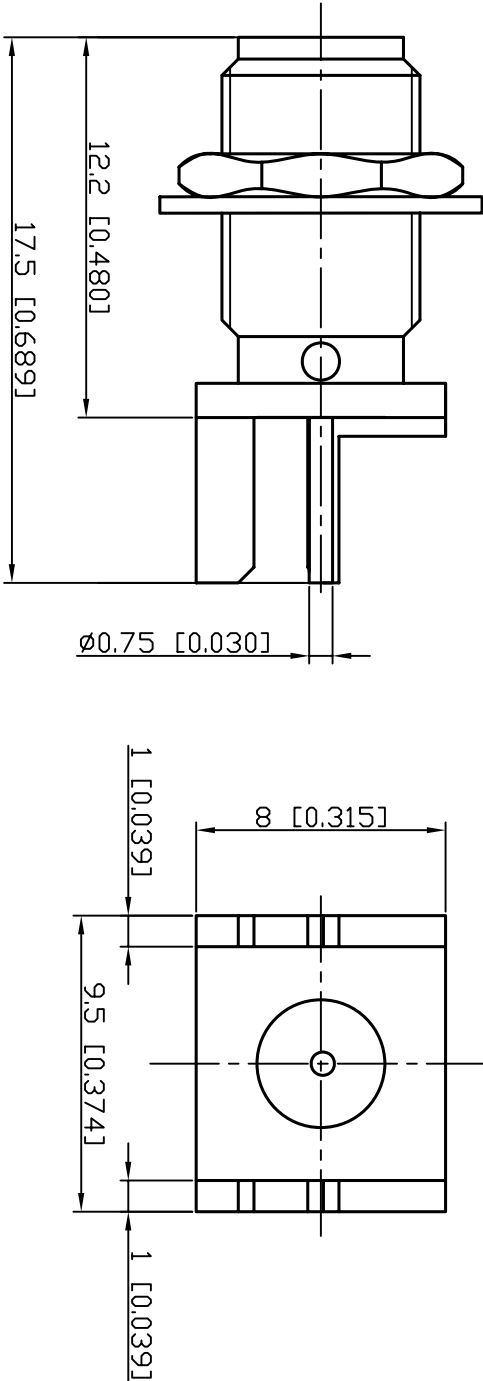

THIS DRAWING IS A CONTROLLED DOCUMENT.

SHANGHAI SHIDI TECHNOLOGY INC.

SMA-50K JACK

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVED		NAME	
MM		0 P/C ± -		DWG		Rebecca	
1 P/C ± 0.25		PRODUCT SPEC		CHK		-	
2 P/C ± 0.15		APPLICATION SPEC		15-08-2011		-	
3 P/C ± -		WEIGHT		-		-	
4 P/C ANGLES ± -		SIZE		A3		CAGE CODE	
MATERIAL		DRAWING NO		G-22368-0		RESTRICTED TO	
-		SCALE		1		SHEET	
-		REV		0		DATE	