



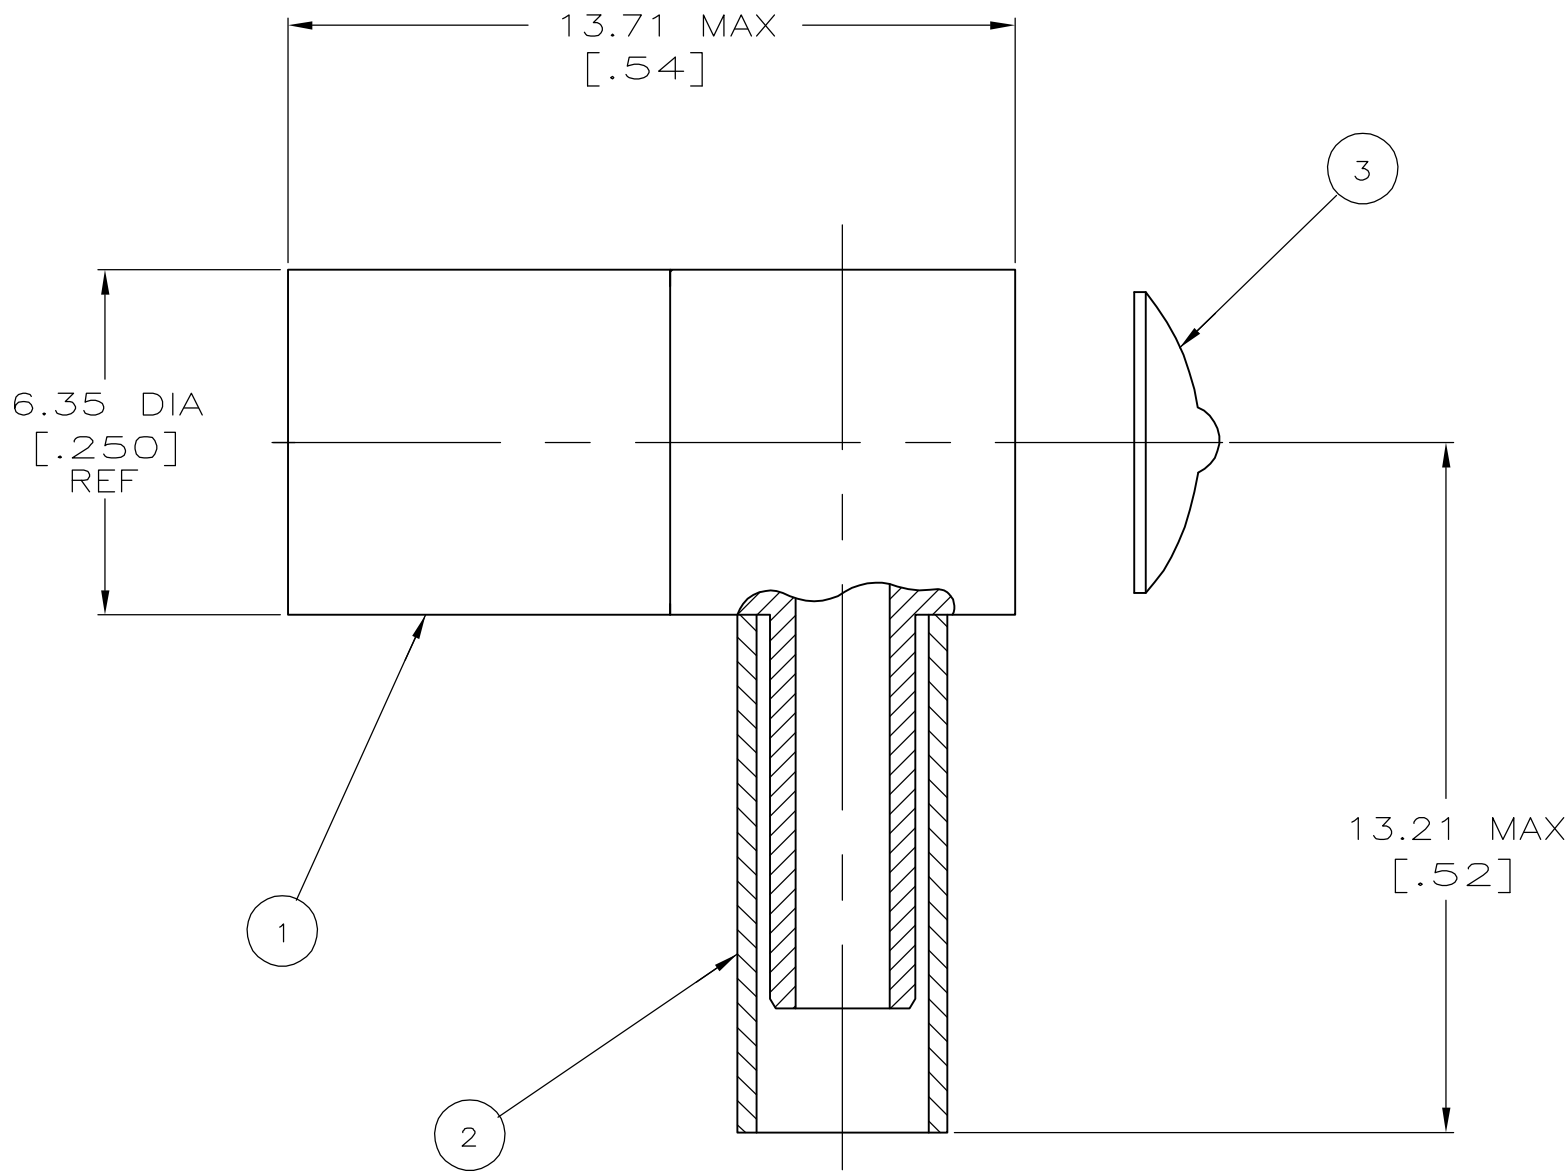

1. INTERFACE PER MIL-C-39012.
2. SEE INSTRUCTION SHEET 408-2987-9.
3. USES SCREW MACHINED CONTACT.

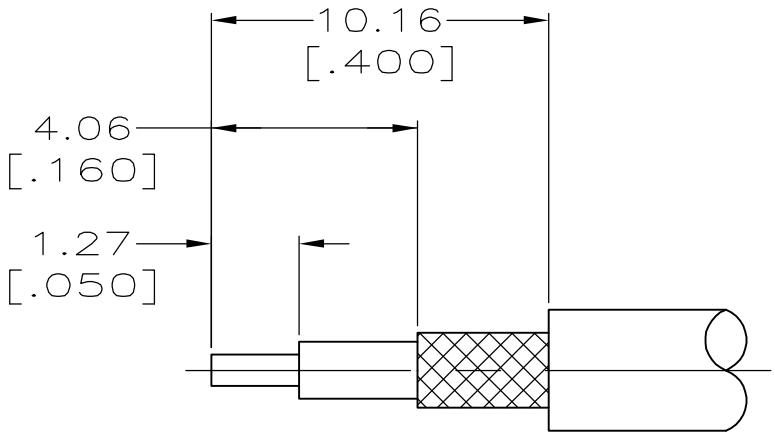

RECOMMENDED STRIP LENGTHS
SCALE NTS

SUPERSEDED BY 1-414363-1	OBSOLETE	C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-6	RG 174,188,316(ALL DBL SHIELDED)	③1-414363-4			
		C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-1	RG 174,188,316(ALL DBL SHIELDED)	1-414363-2			
		C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-1	RG 174,188,316(ALL DBL SHIELDED)	1-414363-1			
	OBSOLETE	A	58483-1	.105	HX4-1637	414013-3	1-413889-5	414364-4	RG 178,196	414363-9			
		A	58483-1	.105	HX4-1637	414013-3	1-413889-5	414364-3	RG 178,196	414363-8			
	OBSOLETE	C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-2	RG 174,188,316(ALL DBL SHIELDED)	414363-6			
		B	58483-1	.128	HX4-1637	414013-3	1-413889-3	414364-2	RG 174,188,316	414363-5			
		C	58483-1	.151	HX4-1637	414013-3	1-413889-4	414364-1	RG 174,188,316(ALL DBL SHIELDED)	414363-4			
		B	58483-1	.128	HX4-1637	414013-3	1-413889-3	414364-1	RG 174,188,316	414363-3			
		POSITION LETTER	AMP DIE SET	HEX SIZE	DANIELS DIE SET	③	END CAP QTY=1	②	FERRULE QTY=1	①	PLUG ASSY QTY=1	CABLE	PART NO
	AMP PRO-CRIMPER FOR BRAID CRIMP			M 22520/5-01 FOR BRAID CRIMP									
TOOLING INFORMATION							THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MOYER	19JUN92	tyco Electronics		Tyco Electronics Corporation Harrisburg, PA 17105-3608
									CHK	25JUN92			