
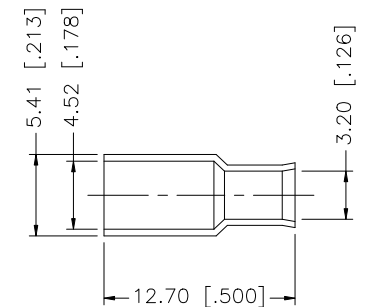

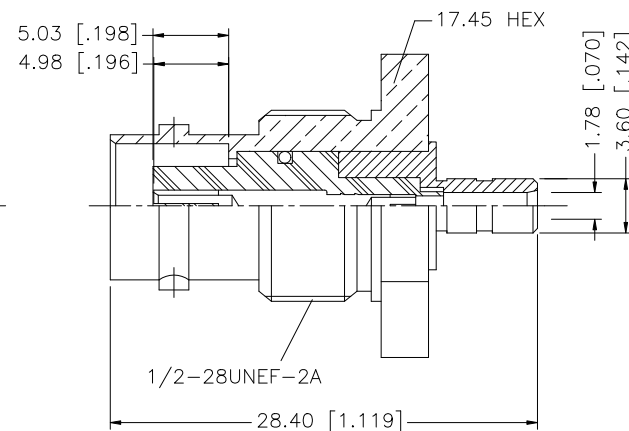
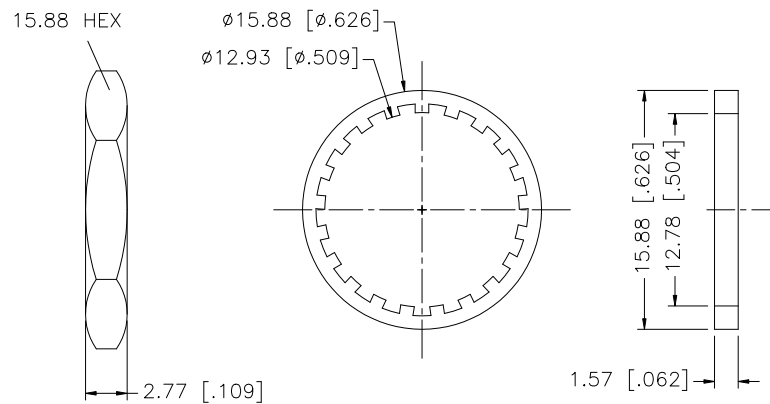


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/23/08	—	INITIAL RELEASE

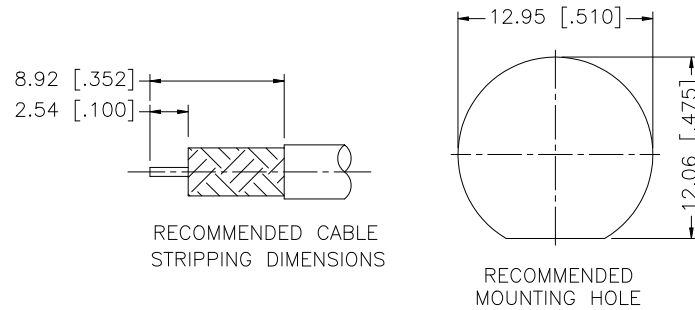

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .178" [4.52]
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8	FERRULE	BRASS	NICKEL	1		DRAWN	GRS	11/23/08						
7	HEX NUT	BRASS	NICKEL	1		CHECKED				PART DESCRIPTION BNC JACK, SEALED BULKHEAD, FOR RG-174/U, RG316/U AND RD316/U CABLE				
6	LOCK WASHER	BRASS	NICKEL	1		ISSUED								
5	GASKET	SILICONE	RED	1		SHEET		1 OF 1		PART NO. 112517-10				
4	CONTACT PIN	BRASS	GOLD	1										
3	CONTACT PIN	BER. COPPER	GOLD	1		CAD FILE				DWG. NO. 112517-10.DWG				
2	INSULATOR	PTFE	NATURAL	1		C:/112/112517-10.DWG								
1	BODY	BRASS	NICKEL	1					REV.	NC	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY										