




# 50 Ohm SMB Straight Crimp Type Jack - Solder or Crimp Captivated Contact

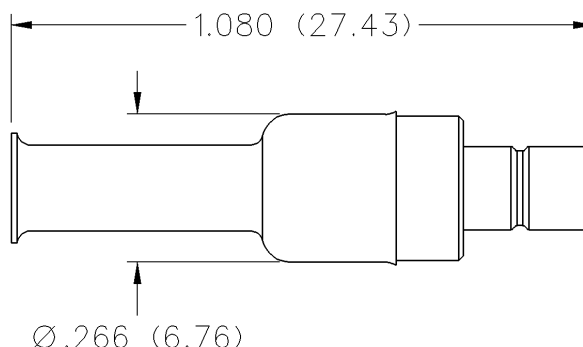

| CABLE TYPE                        | GOLD PLATED  | NICKEL PLATED |
|-----------------------------------|--------------|---------------|
| RG-161/U, 174, 179, 187, 188, 316 | 131-3303-001 | 131-3303-006  |

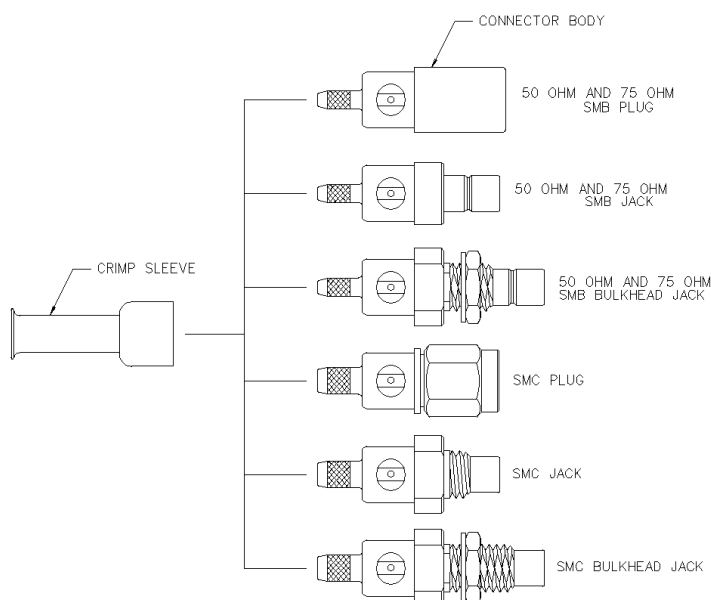

| PART NUMBER      | CRIMP HEX   |
|------------------|-------------|
| 131-3302-001/006 | .128 (3.25) |

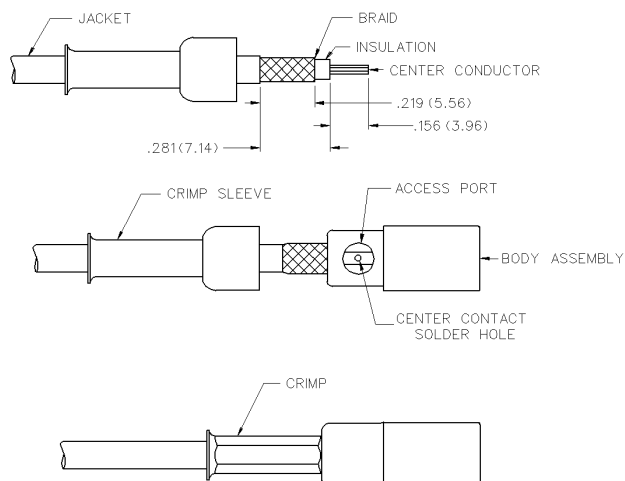

1. Identify connector parts. (2 piece parts - except bulkhead)
2. Strip cable to dimensions shown. Do not nick braid or center conductor. A wire stripper of correct size is recommended for this step. Twist stranded center conductor into tight bundle and tin. Slide crimp sleeve onto cable as shown.
3. Flare braid and slide cable into body making certain that the cable insulation bottoms in center contact.

**Solder Attachment:** Solder center conductor to contact through the side access ports and hole in center contact. Use a minimum amount of solder for a full fillet joint. **.020 (0.51) diameter solder is recommended.**

Crimp 50 Ohm connector contacts with 141-0000-911 dieset in 144-900 tool frame. Crimp 75 Ohm connector contacts with 141-0000-924 dieset in 144-0000-900 tool frame.

# SMB - 50 Ohm Connectors

## Specifications



### ELECTRICAL RATINGS

**Impedance:** 50 ohms

**Frequency Range:** Connectors ..... 0-4 GHz  
Dummy loads ..... 0-1 GHz

**VSWR:** (f = GHz)      Straight      Right Angle  
                                 Cabled      Cabled  
RG-178 cable ..... 1.30 + .04f      1.45 + .06f  
RG-316, RG-58, and .086 semi-rigid cable ..... 1.25 + .04f      1.35 + .04f  
Adapters ..... 1.20 + .04f  
Uncabled receptacles, dummy loads ..... N/A

**Working Voltage:** (Vrms maximum)<sup>†</sup>

| Connectors for Cable Type      | Sea Level | 70K Feet |
|--------------------------------|-----------|----------|
| RG-178                         | 250       | 60       |
| RG-316, RG-58, .086 semi-rigid |           |          |
| uncabled receptacles, adapters | 335       | 85       |
| Dummy loads                    |           | N/A      |

**Dielectric Withstanding Voltage:** (VRMS minimum at sea level)<sup>†</sup>

|                                                |      |
|------------------------------------------------|------|
| Connectors for RG-178                          | 750  |
| Connectors for RG-316, RG-58, .086 semi-rigid, |      |
| uncabled receptacles, adapters                 | 1000 |
| Dummy loads                                    | N/A  |

**Corona Level:** (Volts minimum at 70,000 feet)<sup>†</sup>

|                                               |     |
|-----------------------------------------------|-----|
| Connectors for RG-178                         | 185 |
| Connectors for RG-316, RG-58, .086 semi-rigid | 250 |
| Uncabled receptacles, adapters, dummy loads   | N/A |

**Insertion Loss:** (dB maximum, tested at 1.5 GHz)

|                                                |         |
|------------------------------------------------|---------|
| Straight cable connectors                      | 0.30 dB |
| Right angle cable connectors                   | 0.60 dB |
| Uncabled receptacles, adapters and dummy loads | N/A     |

**Insulation Resistance:** 1000 megohms minimum

| Contact Resistance: (milliohms maximum)    | Initial | After Environmental |
|--------------------------------------------|---------|---------------------|
| Center contact (straight cabled connectors |         |                     |
| and uncabled receptacles)                  | 6.0     | 8.0                 |
| Center contact (right angle cabled         |         |                     |
| connectors and adapters)                   | 12.0    | 16.0                |
| Outer contact (gold plated connectors)     | 1.0     | 1.5                 |
| Outer contact (nickel plated connectors)   | 2.5     | 3.5                 |
| Braid to body (gold plated connectors)     | 1.0     | N/A                 |
| Braid to body (nickel plated connectors)   | 2.5     | N/A                 |

**RF Leakage:** (dB minimum tested at 2.5 GHz)

|                                                |        |
|------------------------------------------------|--------|
| Cable connectors                               | -55 dB |
| Uncabled receptacles, adapters and dummy loads | N/A    |


<sup>†</sup>Avoid user injury due to misapplication. See safety advisory definitions inside front cover.

\*\* All gold plated parts include a .00005" min. nickel underplate barrier layer.

### MATING ENGAGEMENT FOR SMB SERIES PER MIL-C-39012

#### Notes

1. ID of contact to meet VSWR mating characteristics and connector durability when mated with a dia .019 / 0.53 male contact.
2. Must meet the force to engage and disengage when mated with mating part.

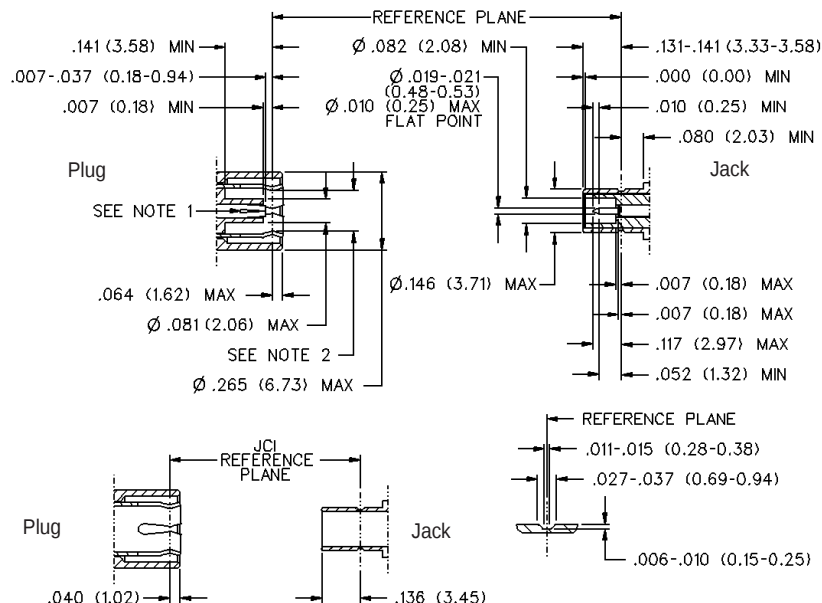

**RF High Potential Withstanding Voltage:** (Vrms minimum, tested at 4 and 7 MHz)<sup>†</sup>

|                                   |     |
|-----------------------------------|-----|
| Connectors for RG-178             | 500 |
| Connectors for RG-316, RG-58      | 700 |
| Uncabled receptacles and adapters | 600 |
| Dummy loads                       | N/A |

**Power Rating (Dummy Load):** 0.5 watt @ +25°C, derated to 0.25 watt @ +125° C

### MECHANICAL RATINGS

**Engagement Design:** MIL-C-39012, Series SMB

**Engagement/Disengagement Force:** 2 pounds min to 14 pounds maximum axial force

**Contact Retention:** 4 lbs. min axial force (captivated contacts)

1 inch-ounce min torque (uncabled receptacles)

**Cable Retention:**      **Axial Force\* (pounds)**      **Torque (in-oz)**

|                                |    |     |
|--------------------------------|----|-----|
| Connectors for RG-178          | 10 | N/A |
| Connectors for RG-316          | 20 | N/A |
| Connectors for RG-58           | 40 | 16  |
| Connectors for .086 semi-rigid | 30 | 16  |

\* or cable breaking strength whichever is less.

**Durability:** 500 cycles minimum

### ENVIRONMENTAL RATINGS

**(Meets or exceed the applicable paragraph of MIL-C-39012)**

**Temperature Range:** Connectors ..... - 65°C to + 165°C  
Dummy loads ..... - 65°C to + 125°C

**Thermal Shock:** MIL-STD-202, Method 107, Condition B (N/A dummy loads)

**Corrosion:** MIL-STD-202, Method 101, Condition B (N/A dummy loads)

**Shock:** MIL-STD-202, Method 213, Condition B (N/A dummy loads)

**Vibration:** MIL-STD-202, Method 204, Condition B (N/A dummy loads)

### MATERIAL SPECIFICATIONS

**Bodies:** Brass per QQ-B-626 or zinc per ASTM B86-71, gold plated\*\* per MIL-G-45204 .00001 min or nickel plated per QQ-N-290

**Contacts:** Male - brass per QQ-B-626, gold plated per MIL-G-45204 .00003" min.

Female - beryllium copper per QQ-C-530, gold plated per MIL-G-45204 .00003" min.

**Insulators:** PTFE fluorocarbon per ASTM D 1710 and ASTM D 1457 OR Teflon PFA 340

**Expansion Caps:** Brass per QQ-B-613, gold plated per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

**Crimp Sleeves:** Copper per WW-T-799, gold plated per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

**Mounting Hardware:** Brass (nuts) per QQ-B-626 or phosphor bronze (lockwashers) QQ-B-750, gold plated per MIL-G-45204 .00001" min. or nickel plated per QQ-N-290

**Cover Rings:** Phosphor Bronze per QQ-B-750, gold plated per MIL-G-45204 .00001 min. or nickel plated per QQ-N-290.