

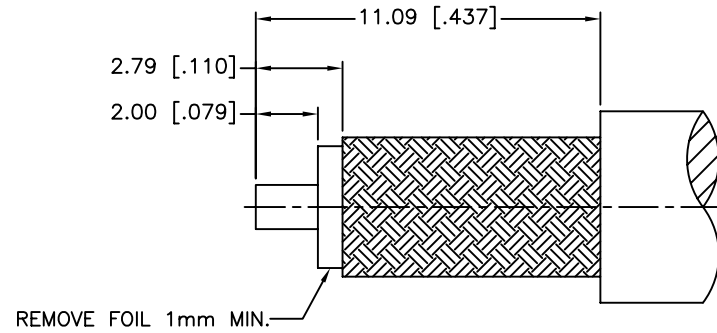
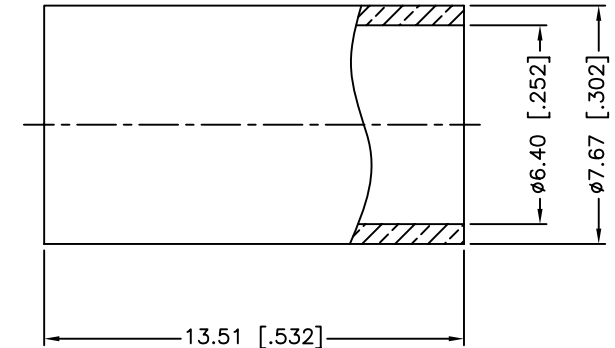


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/07/11	XXXXXX	INITIAL RELEASE

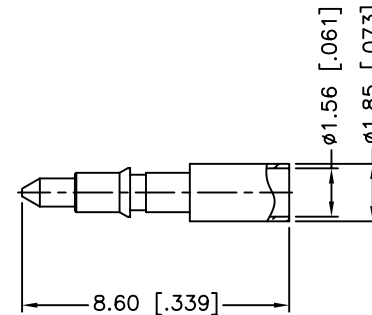

RECOMMENDED
CABLE STRIPPING DIM'S

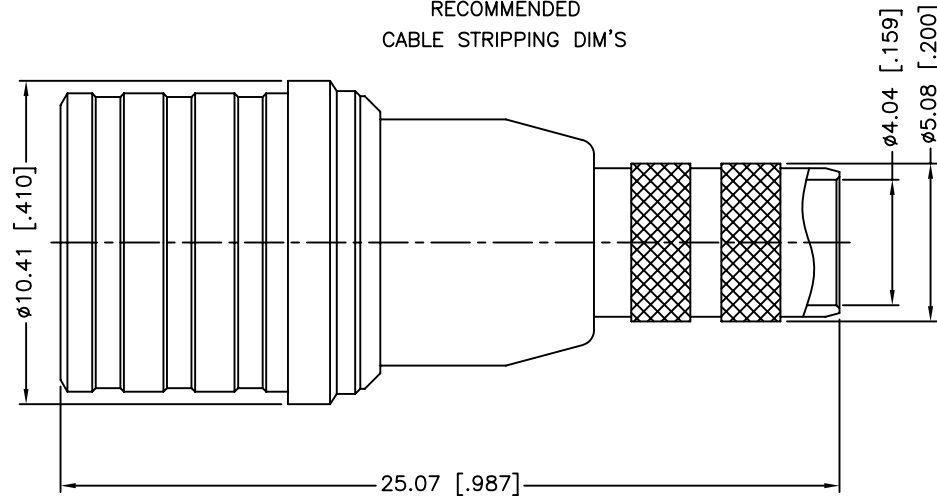

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER
3. IMPEDANCE:50 OHM
4. FREQUENCY RANGE: 0-6 GHz
5. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex				
7	FERRULE	COPPER	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	DRAWN	M.ZHANG	06/07/11							
6	CONTACT PIN	BRASS	GOLD	1		CHECKED									
5	SLEEVE	BRASS	NEXCOTE	1		ISSUED									
4	BARREL	BRASS	NEXCOTE	1		SHEET	1 OF 1								
3	INSULATOR	PTFE	NATURAL	1											
2	OUT CONTACT	PHOSPHOR BRONZE	NEXCOTE	1	DO NOT SCALE DRAWING	CAD FILE		C:/CONNEX/134104.DWG		PART DESCRIPTION			QMA STRAIGHT CRIMP PLUG – 50 ohm (FOR LMR–240 CABLE)		
1	BODY	BRASS	NEXCOTE	1					PART NO.		134104				
	DESCRIPTION	MATERIAL	FINISH	QTY						DWG. NO. 134104.DWG		REV. NC	SIZE A	SCALE NA	