

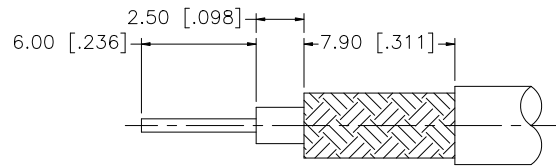
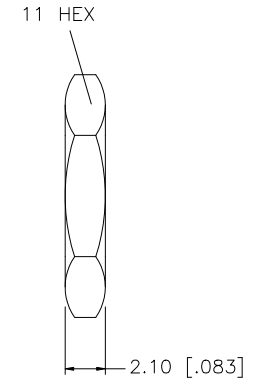



REV.	DATE	ECR NO.	DESCRIPTION
NC	09/07/08	—	INITIAL RELEASE
A	12/07/08	—	ADD CRIMP NOTES

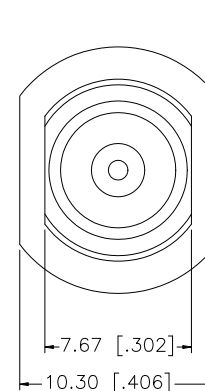

RECOMMENDED CABLE STRIPPING DIM'S

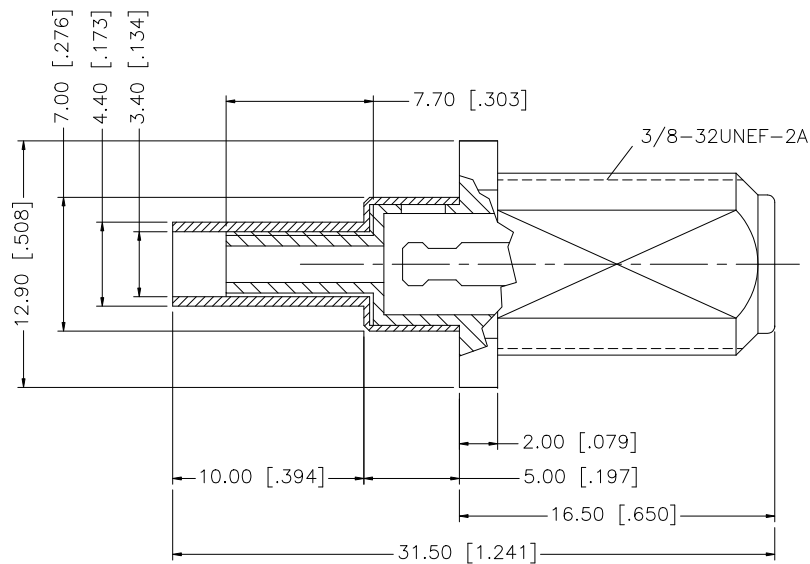

NOTES:

1. CRIMPED FERRUEL HEX CRIMP SIZE .151" [3.83]
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	GRS	12/07/08										
7						CHECKED												
6						ISSUED												
5	FERRULE	BRASS	TIN LEAD	1			SHEET		1 OF 1		PART DESCRIPTION							
4	INSULATOR	P.P.	NATURAL	1								F BULKHEAD CRIMP JACK (FOR RG-179 DOUBLE BRAID CABLE)						
3	CONTACT PIN	BER. COPPER	BRT. TIN	1														
2	INSULATOR	P.P.	NATURAL	1														
1	BODY	BRASS	TIN LEAD	1							PART NO.							
	DESCRIPTION	MATERIAL	FINISH	QTY							222167-10							
					CAD FILE					DWG. NO.		222167-10.DWG	REV.	A	SIZE	A	SCALE	NA
					C:/222/222167-10.DWG													