
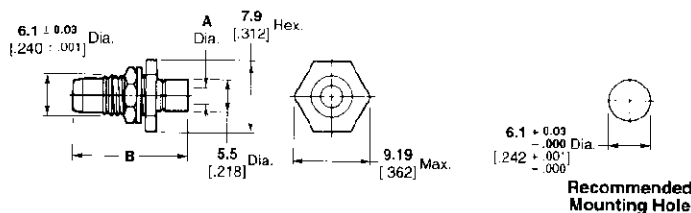


OSP Miniature Modular Blind Mate Connectors (Continued)
**For Semi-Rigid Cable, 2.16 [.085] and 3.58 [.141] Dia., OSCC Solderless
Compression Crimp Attachment**


**Bulkhead Feedthrough
Cable Plug
Fixed Rear Mount**



Cable	Plating	Dim. A	Dim. B		M/A-COM Model No.	Part No.
			Before Crimping	After Crimping		
RG-405/U 2.16 .085	Passivated Stainless Steel	2.2 .088	19.8 .782	17.2 .677	45C3-7685-02	1059399-1

Outline drawing shows after crimp dimensions.



**Bulkhead Feedthrough
Cable Jack
Fixed Rear Mount**

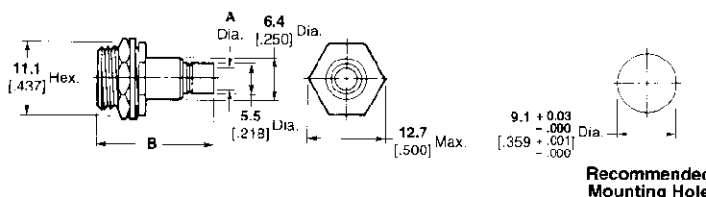

Cable	Plating	Dim. A	Dim. B		M/A-COM Model No.	Part No.
			Before Crimping	After Crimping		
RG-402/U 3.58 .141	Passivated Stainless Steel	3.6 .143	21.1 .830	18.2 .715	4504-7641-02	1059408-1
RG-405/U 2.16 .085	Passivated Stainless Steel	2.2 .088	21.1 .830	18.2 .715	4504-7685-02	1059409-1

Outline drawing shows after crimp dimensions.

**Flange Mount Cable Jack
Floating Rear Mount**

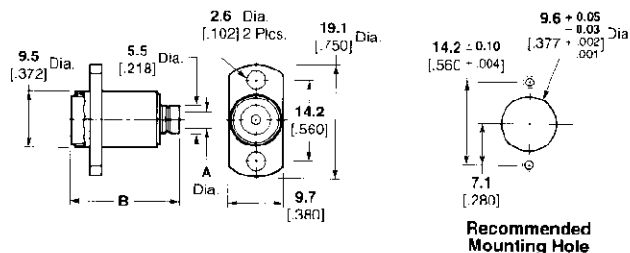

Cable	Plating	Dim. A	Dim. B		M/A-COM Model No.	Part No.
			Before Crimping	After Crimping		
RG-402/U 3.58 .141	Passivated Stainless Steel	3.6 .143	22.6 .891	19.8 .780	4506-7641-02	1059451-1
RG-405/U 2.16 .085	Passivated Stainless Steel	2.2 .088	22.6 .891	19.8 .780	4506-7685-02	1059452-1

Outline drawing shows after crimp dimensions.

When using semi-rigid cable, it is recommended that a service loop be used to facilitate the float features of the connector.