

# HUBER+SUHNER® DATA SHEET

## Coaxial Cable Connector: 25\_SMA-50-3-15/111\_N

Rev.: C




### Description

Straight panel cable jack, flange mount

Interface Standards

IEC 60169-15\_MIL-STD-348A/310\_CECC 22110

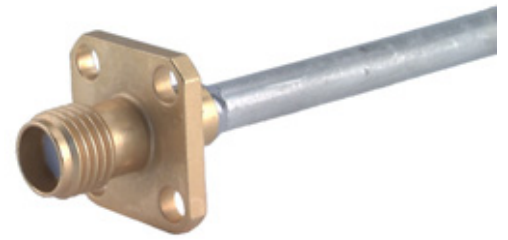

### Technical Data

#### Electrical Data

Impedance 50  $\Omega$   
Interface frequency max. 18 GHz

#### Mechanical Data

Centre contact soldered  
Outer contact soldered  
Weight 0.0022 kg

#### Environmental Data

Operating Temperature -65 °C to 165 °C  
2002/95/EC (RoHS) compliant

#### Material Data

##### Piece Parts

Centre contact  
Outer contact  
Body  
Insulator

##### Material

Copper Beryllium Alloy  
Copper Beryllium Alloy  
Copper Beryllium Alloy  
PFA / PTFE

##### Surface Plating

Gold Plating (Nickel underplated)  
Gold Plating (Nickel underplated)  
Gold Plating (Nickel underplated)

### Related Documents

Catalogue drawing DCA-00009021  
Assembly instruction DOC-0000179086  
Mounting hole DOU-00008784

### Ordering Information

Single package 25\_SMA-50-3-15/111\_NE  
Bulk 100 pcs package 25\_SMA-50-3-15/111\_NH

### Additional Information

Suitable cables EZ\_141\_TP\_M17, SUCOFORM\_141, MULTIFLEX\_141

HUBER+SUHNER is certified according to ISO 9001 and ISO 14001

#### WAIVER!

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical contained specifications and/or the fitness for any particular purpose. The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

**HUBER+SUHNER – Excellence in Connectivity Solutions**



**HUBER+SUHNER AG**  
RF Technology  
9100 Herisau, Switzerland  
Phone +41 (0)71 353 41 11  
Fax +41 (0)71 353 45 90  
www.hubersuhner.com