


PRODUCT DATA DRAWING

CAD
GENERATED
DRAWING

DCN
CONTROLLED
DOCUMENT

DWG. NO.

2933-6001

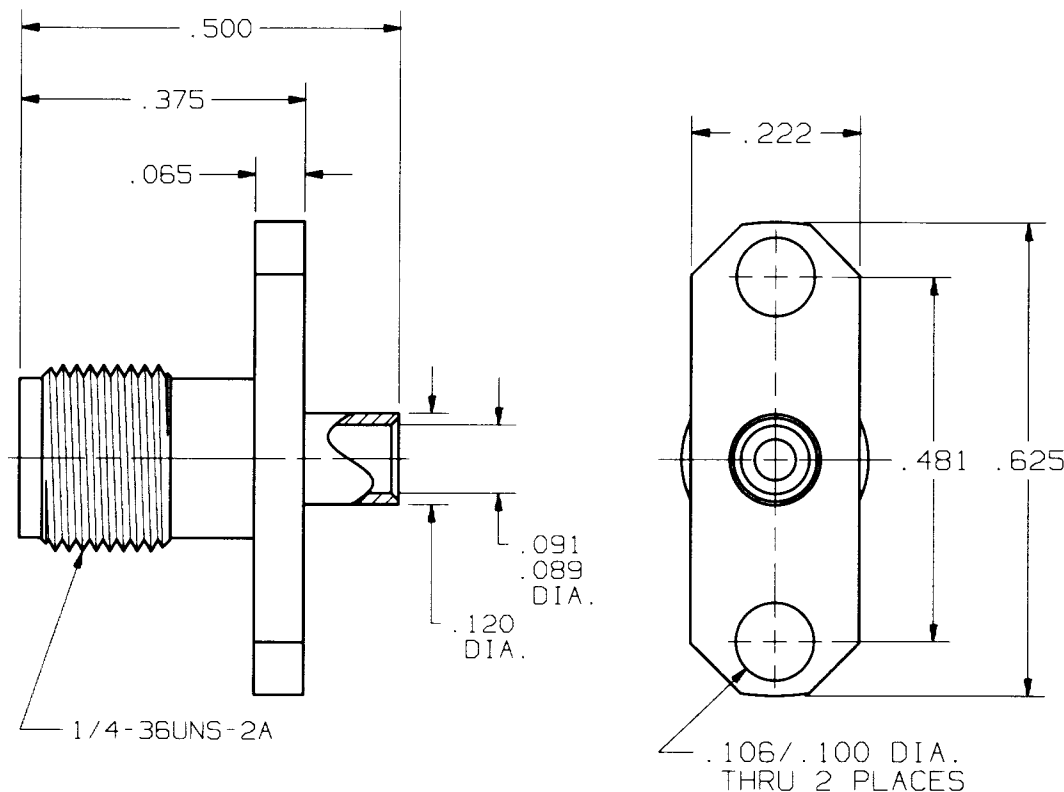

MATERIAL:

BODY: STAINLESS STEEL PER AMS-5640,
UNS S30300, TYPE 1.

CONTACT: BERYLLIUM COPPER PER ASTM-B-196,
ALLOY C17300, COND. TD04.

INSULATOR: TEFLON PER ASTM-D-1457.

FINISH:

BODY: GOLD PER MIL-G-45204, TYPE I,
GRADE C, CLASS 0; OVER NICKEL
PER QQ-N-290, CLASS 2.

CONTACT: GOLD PER MIL-G-45204, TYPE I,
GRADE C, CLASS 1; OVER NICKEL
PER QQ-N-290, CLASS 1.

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC-18.0 GHz
D.W.V.: 1000 VRMS
INSUL. RES.: 5000 MEGOHMS MIN.

SYM.	DESCRIPTION	DATE	APPR.	UNLESS OTHERWISE SPECIFIED:	DIMENSIONS ARE IN INCHES			Soltron Vector Microwave 3301 ELECTRONICS WAY WEST PALM BEACH, FL. 33407 TITLE: SMA JACK, 2 HOLE PANEL RECEPTACLE FOR .085 DIA. S.R. CABLE DWG. NO. 2933-6001
B	REV.DCN F8112	1/81	ND	1)ALL DIMENSIONS ARE AFTER PLATING. 2)BREAK CORNERS & EDGES .005 R.MAX. 3)CHAM. 1st & LAST THDS. 4)SURFACE ROUGHNESS 63 J MIL-STD-10. 5)DIAS. ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6)REMOVE ALL BURRS.	DECIMALS	FRACTIONAL	ANGULAR	
C	REV.DCN 23357	4/97	R		.X ±.030		X° ±1°0'	
					.XX ±.015	±1/64	X°X' ±15'	
					.XXX ±.005			
				REDRAWN: BRT 4/04/97	MATERIAL: SEE ABOVE			
				CHECKED:	FINISH: SEE ABOVE			
				APPROVED: DGG 3/01/77	SIZE	CAGE NO.	SCALE	
					A	95077	4X	