

PRODUCT DATA DRAWING

CAD
GENERATED
DRAWING

DCN
CONTROLLED
DOCUMENT

DWG. NO.

2950-6081

ENG. FILE COPY


MATERIAL:

BODY: STAINLESS STEEL PER AMS-5640,
UNS S30300, TYPE 1.
CONTACT: BERYLLIUM COPPER PER ASTM-B-196,
ALLOY C17300, COND. TD04.
INSULATOR: TEFLON PER ASTM-D-1457.

FINISH:

BODY: GOLD PER MIL-G-45204, TYPE I,
GRADE C, CLASS 00; OVER NICKEL
PER QQ-N-290, CLASS 1.
CONTACT: GOLD PER MIL-G-45204, TYPE I,
GRADE C, CLASS 1; OVER NICKEL
PER QQ-N-290, CLASS 1.

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC-18.0 GHz
D.W.V.: 1000 VRMS
INSUL. RES.: 5000 MEGOHMS MIN.

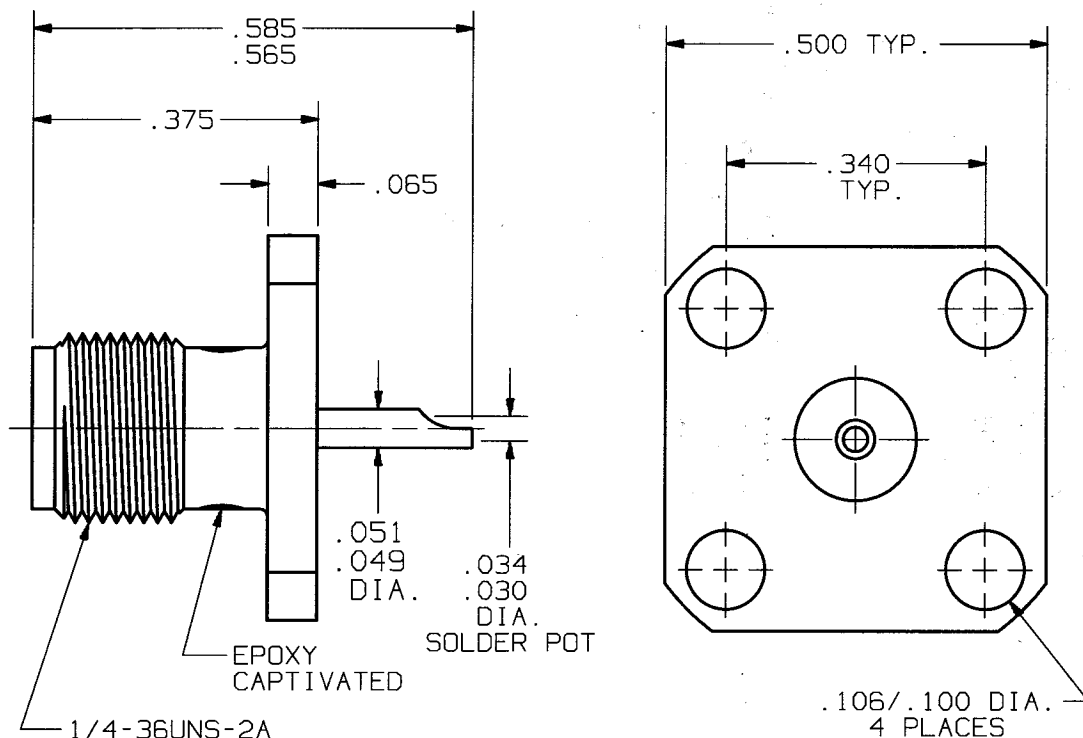

SYM.	DESCRIPTION	DATE	APPR.	UNLESS OTHERWISE SPECIFIED:		DIMENSIONS ARE IN INCHES			Solitron Vector Microwave 3301 ELECTRONICS WAY WEST PALM BEACH, FL. 33407
-	REL.DCN F6664	8/78	DGG	1) ALL DIMENSIONS ARE AFTER PLATING. 2) BREAK CORNERS & EDGES .005 R. MAX. 3) CHAM. 1st & LAST THDS. 4) SURFACE ROUGHNESS 63 J MIL-STD-10. 5) DIAS. ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6) REMOVE ALL BURRS.		TOLERANCES: DECIMALS FRACTIONAL ANGULAR			
A	REV.DCN 23356	4/57				.X ±.030 .XX ±.015 .XXX ±.005			
						±1/64 X° ±1°0' X°X' ±15'			
				REDRAWN: BRT 4/03/97		MATERIAL: SEE ABOVE			TITLE: SMA JACK, 4 HOLE FLANGE MOUNT WITH SOLDER POT
				CHECKED:		FINISH: SEE ABOVE		AREA: N/A	
				APPROVED: DGG 8/24/78		SIZE A	CAGE NO. 95077	SCALE 4X	
									DWG. NO. 2950-6081