

DC BLOCKS

Type N (75Ω), 100 MHz - 4 GHz, 200 Volts

SPECIFICATIONS:

Models: 8184, 8185, 8186

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:


Frequency Range _____ 100 MHz - 4 GHz
VSWR _____ 1.35:1 Max.
Impedance _____ 75 Ohms
Insertion Loss _____ 0.5 dB Max.
Working Voltage _____ 200 Volts
Operating Temp. Range _____ -65°C to +125°C

Mechanical:


*Connectors _____ Nickel Plated Brass
Conductors _____ Gold Plated Beryllium Copper

*75 Ohm Type N Connectors Mate Only with Other 75 Ohm Type N Series.
Mating with 50 Ohm Type N Connectors may cause Damage.

Model Number: **8184**
Inner Only

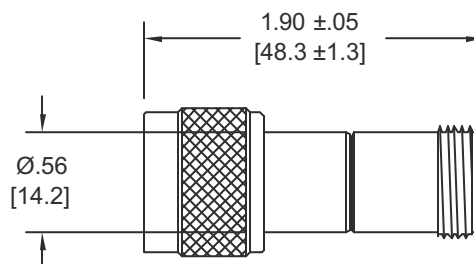

Model Number: **8185**
Outer Only

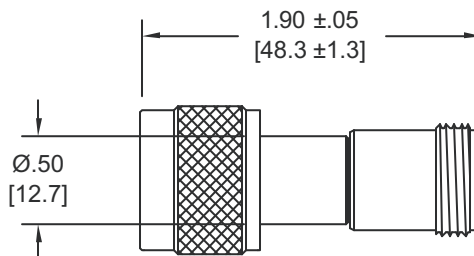

Model Number: **8186**
Inner/Outer

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8184: REVA

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@aeroflex.com