

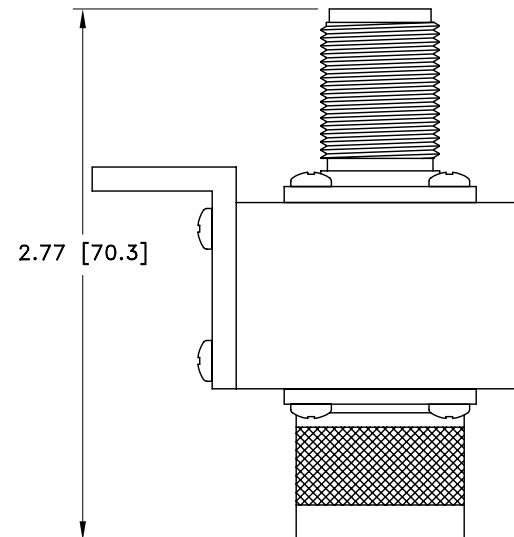
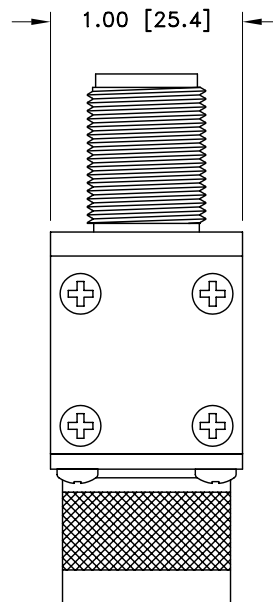


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

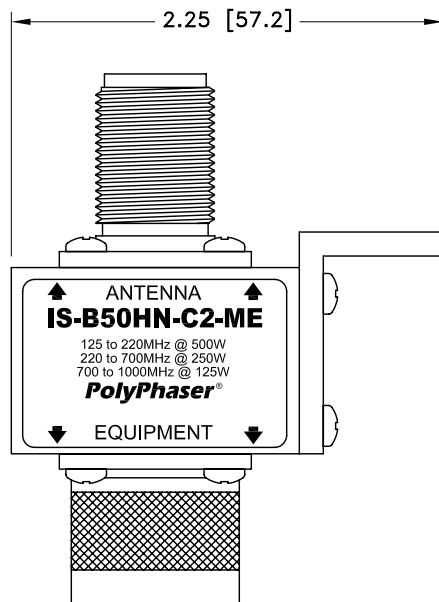

Ø.20 [Ø5.2]

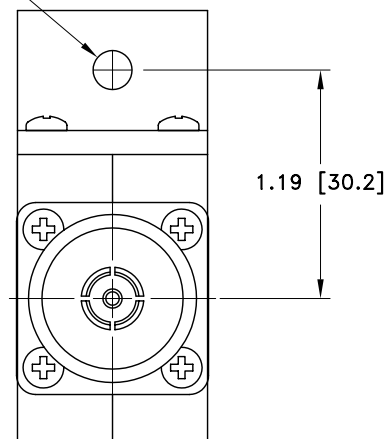

REVISIONS				
REV LTR	DATE	ENG	MKTG	Q.A.
B	09/01/99 ^{SH}	M.M	R.J	J.B
C	01/17/01 ^{SH}	KCB	PH	RM

MAXIMUM CHARACTERISTICS

SURGE:
50kA IEC 1000-4-5 8/20µs WAVEFORM 500 JOULES

TURN-ON:
1,200Vdc ±20%

TURN-ON TIME:
7ns FOR 2kV/ns

FREQUENCY RANGE:
125MHz TO 1,000MHz

VSWR:
≤1.1 TO 1 OVER FREQUENCY RANGE

INSERTION LOSS:
≤0.1dB OVER FREQUENCY RANGE

TEMPERATURE:
-55°C TO +125°C STORAGE/OPERATING +50°C

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

DRAFTER M. JOHNSON	DATE 08/11/94	PolyPhaser® P.O. BOX 9000, MINDEN, NV 89423-9000 (775) 782-2511 FAX (775) 782-4476 DWG NO/PART NO/DESCRIPTION IS-B50HN-C2-ME CUSTOMER PRINT		
MECH ENGINEER - - - -	DATE - - - -			
ELEC ENGINEER K. BARTEL	DATE 08/11/94			
MARKETING - - - -	DATE - - - -			
QUALITY DEPT R. MATHEUS	DATE 08/11/94	CAGE CODE 61114	FILE NAME -C1	SCALE 1/1
		SHEET 1 OF 1		