


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION, 19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
AJ	16				J	REV PER EC 0220-0926-94	1-18-95	MEC
					K	OBSOLETE -26 PER EC 0220-0497-95	10NOV95	MEC

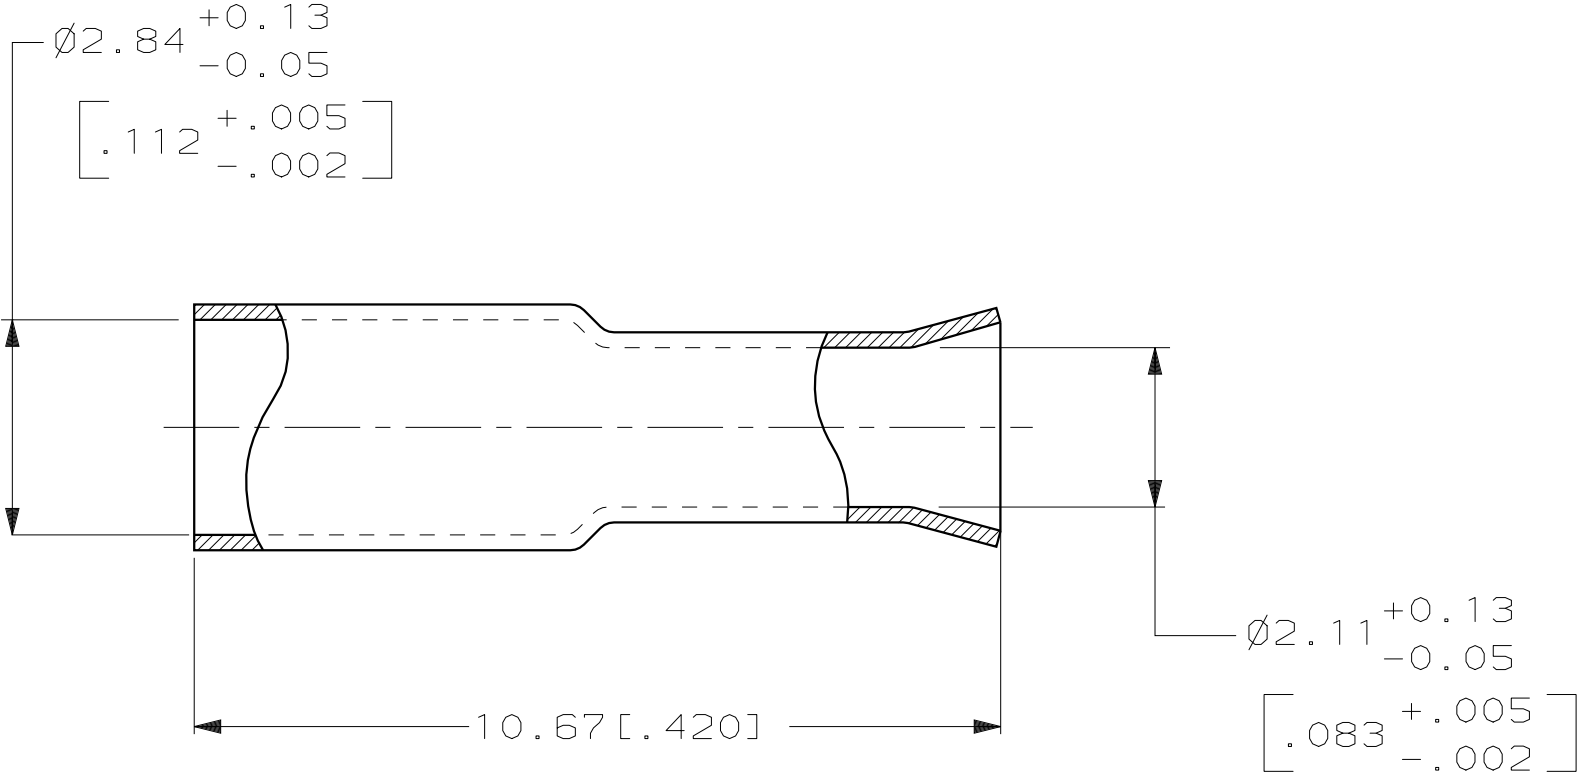

- 1 COPPER PER QQ-C-576.
- 2 SILVER PL PER QQ-C-365.
5.08μm [.000200] MIN THICKNESS
- 3 TIN LEAD PL PER ASTM-B-545
0.76μm [.000030] MIN THICKNESS

OBSOLETE	3	2-328667-6
	2	328667
FINISH		PART NUMBER

			PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.38 [.015] 3 PLC DEC ± - ANGLES ± -	DR	4-15-91 S.D.KOHL	AMP AMP Incorporated Harrisburg, PA 17105-3608	
	CHK	5-14-91 M.E. COWHER		
	APPD	5-16-91 M. PHILLIPS	NAME FERRULE	
	APPD	5-16-91 M.E. COWHER		
MATERIAL SEE NOTES	PRODUCT SPEC	-	SIZE	CAGE CODE
FINISH SEE NOTES	APPLICATION SPEC	-	B	00779
		WEIGHT	-	DRAWING NO 328667
		SCALE	10:1	SHEET 1 OF 1