

TERMINATIONS, FEEDTHRU

BNC, DC - 500 MHz, 2 Watts

SPECIFICATIONS:

Model: 3032

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC - 500 MHz

VSWR _____ 1.25:1 Max.

Input Power _____ 2 Watts Avg. @ +25°C
Derated Linearly to 0.5 Watts @ +125°C

Impedance _____ 50 Ohms


Operating Temp. Range _____ -65°C to +125°C

Mechanical:

BNC Connectors _____ Nickel Plated Brass
Mates with MILSTD-348

Conductors _____ Gold Plated Beryllium Copper or Brass

Model Number: 3032
BNC Male/Female Connector

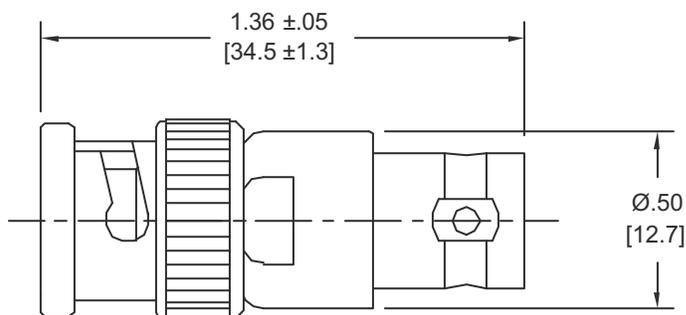

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Units that operate over a more specific frequency band and/or offer very low return loss (VSWR) are also available.

3032: REV H

AEROFLEX
INMET

Aeroflex / Inmet, Inc. 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com