

TERMINATIONS

TNC, DC - 12.4 GHz, 2 Watts

SPECIFICATIONS:

Models: 3069M, 3069F, 3069MC, 3069FC


RoHS
Compliant

Electrical:

Frequency Range _____ DC - 12.4 GHz
VSWR _____
DC - 4 GHz _____ 1:10:1 Max.
4 - 8 GHz _____ 1:15:1 Max.
8 - 12.4 GHz _____ 1:25:1 Max.
Impedance _____ 50 Ohms
Input Power _____ 2 Watts Avg. @ +25°C
Derated Linearly to 0.25 Watts @ +125°C
Peak Power _____ 1.0 kW Max.
(5uSec Pulse, .05% Duty Cycle)
Operating Temp Range _____ -55°C to +125°C


Mechanical:

TNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper
Bead Chain _____ Passivated Stainless Steel

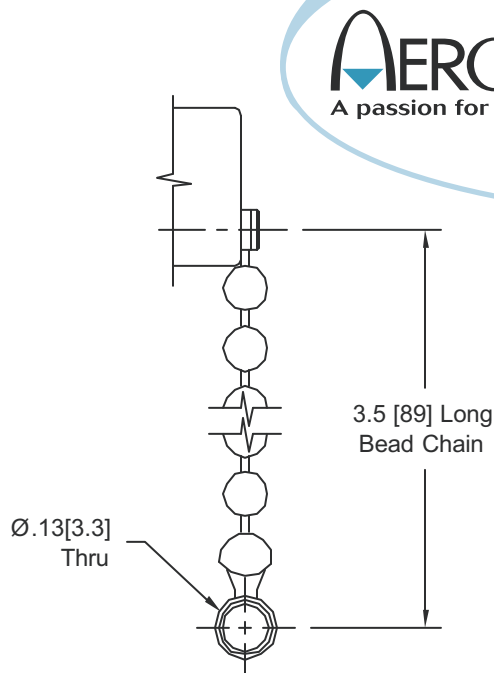


CHAIN DETAIL

Model Number: **3069M**
TNC Male Connector

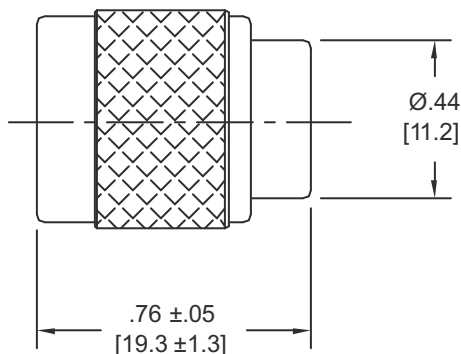

Model Number: **3069F**
TNC Female Connector

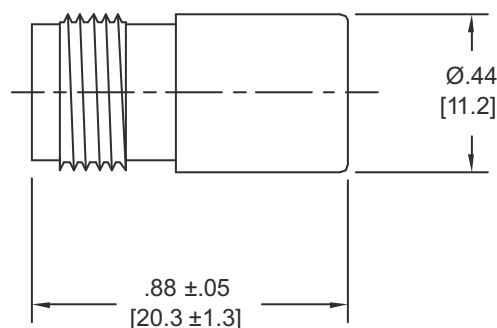

HOW TO ORDER:

Model Number: **3069XY**

Connector Configuration _____ Style _____
M = Male = No Chain
F = Female C = Chain Included

Ordering Examples:

Model Number: **3069MC**
DC - 12.4 GHz; TNC Male; Chain Included

Model Number: **3069F**
DC - 12.4 GHz; TNC Female; No Chain

Model Number: **3069M**
DC - 12.4 GHz; TNC Male; No Chain

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

3069: REV F



Aeroflex / Inmet, Inc. 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@aeroflex.com

