

TERMINATIONS

TNC, DC - 12.4 GHz, 5 Watts

SPECIFICATIONS:

Models: 3073TM, 3073TF, 3073TMC, 3073TFC

RoHS
Compliant


AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC - 12.4 GHz
VSWR:
DC - 4 GHz _____ 110:1 Max.
4 - 8 GHz _____ 115:1 Max.
8 - 12.4 GHz _____ 120:1 Max.
Impedance _____ 50 Ohms
Input Power _____ 5 Watts Avg. @ +25°C
Derated Linearly to 1 Watt @ +125°C
Peak Power _____ 5 kW Max.
(5uSec Pulse, .05% Duty Cycle)
Operating Temp Range _____ -65°C to +125°C


Mechanical:

TNC Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
Housing _____ Anodized Aluminum
Conductors _____ Gold Plated Beryllium Copper
Bead Chain _____ Passivated Stainless Steel

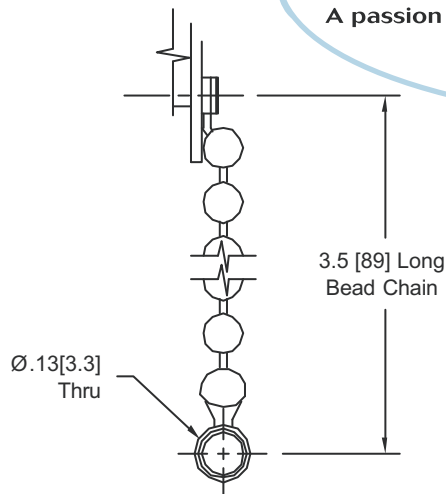


CHAIN DETAIL

Model Number: **3073TF**
TNC Female Connector

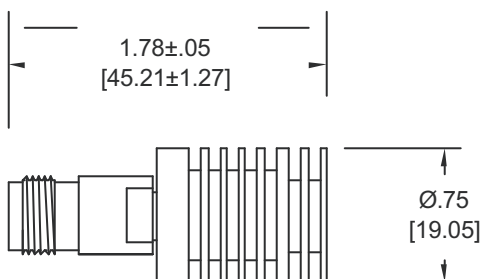

Model Number: **3073TM**
TNC Male Connector

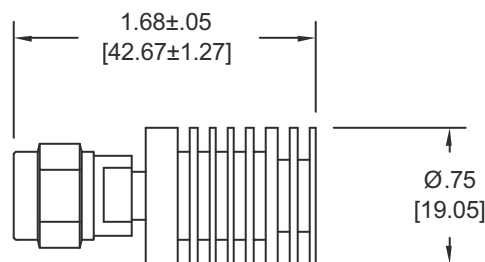

HOW TO ORDER:

Model Number: **3073TXY**
Connector Configuration _____ Style
M = Male _____ = No Chain
F = Female _____ C = Chain Included

Ordering Examples:

Model Number: **3073TMC**
DC - 12.4 GHz; TNC N Male; Chain Included

Model Number: **3073TF**
DC - 12.4 GHz; TNC N Female; No Chain

Model Number: **3073TM**
DC - 12.4 GHz; TNC N Male; No Chain

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design, specifications are subject to change without notice. Contact factory for technical specifications before purchasing and/or use.

3037T: REV -

AEROFLEX
INMET

Aeroflex / Inmet, Inc. 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet@aeroflex.com