

TERMINATIONS

Type N DC - 12.4 GHz, 25 Watts

SPECIFICATIONS:

Models: 3112-NF, 3112-NM

RoHS
Compliant

Electrical:


Frequency Range _____ DC - 12.4 GHz
VSWR
DC - 1 GHz _____ 1.10:1 Max.
1 - 4 GHz _____ 1.25:1 Max.
4 - 8 GHz _____ 1.35:1 Max.
8 - 12.4 GHz _____ 1.45:1 Max.
Impedance _____ 50 Ohms
Input Power _____ 25 Watts Avg. @ +25°C
Derated Linearly to 5 Watts @ +125°C
Peak Power _____ 5 kW Max.
(5uSec Pulse, .05% Duty Cycle)
Operating Temp Range _____ -65°C to +125°C

Mechanical:


Type N Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper
Housing _____ Anodized Aluminum

AEROFLEX
A passion for performance.

Model Number: **3112-NF**
Type N Female Connector

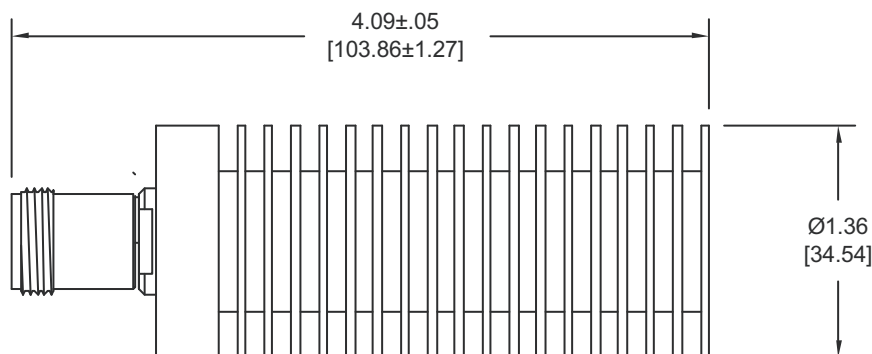

Model Number: **3112-NM**
Type N Male Connector

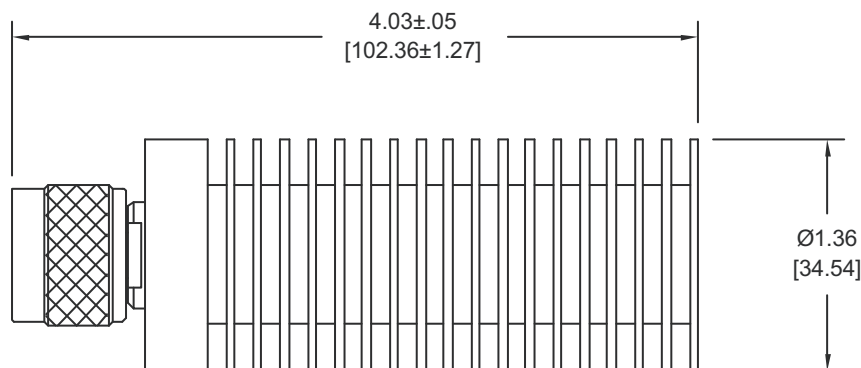

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design, specifications are subject to change without notice. Contact factory for technical specifications before purchasing or use.

3112-N: REV A

AEROFLEX
INMET

Aeroflex / Inmet, Inc. 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com