





DATA SHEET · PRODUCTS & SERVICES

Chip antenna for Zigbee, RFID and ISM 868/900




Fractus specialises in enabling effective mobile communications. Using Fractus technology, we design and manufacture optimised antennas to make your wireless devices more competitive. Our mission is to help our clients develop innovative products and accelerate their time to market through our expertise in antenna design, testing and manufacturing.

EZConnectTM ZigbeeTM Chip Antenna

The Fractus EZConnect Zigbee Chip Antenna is a compact rectangular antenna suitable for smart home, security and other industrial devices using the 915 MHz ISM band, where low power consumption and cost are top of mind. Taking advantage of the space-filling properties, this compact monopole antenna is ideal for use within indoor (highly scattered) as well as outdoor environments.

The Fractus EZConnect Zigbee Chip Antenna speeds your time to market by allowing you to easily integrate it within your industrial design (SMD mounting).

 $18.0 \ mm \ x \ 7.3 \ mm \ x \ 0.8 \ mm \ (image larger than actual size)$

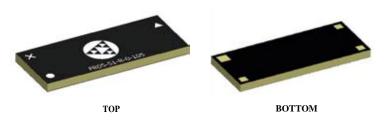

PAT. US 7,148,850, US 7,202,822

Product Benefits

P/N: FR05-S1-R-0-105

Small form factor

Allows integration into space limited areas easily and effectively.

■ Broad bandwidth

Ensures robust performance in different PCB dimensions and plastic housing, without the need for a matching network.


High performance

Optimises power consumption and increases device range.

Omnidirectional pattern

Increases device robustness due to a uniform radiation pattern.

VSWR and Total Efficiency (%) for 900 MHz band

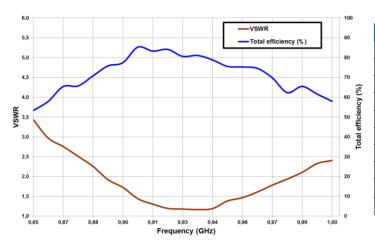

| 900 MHz Technical features | |
|----------------------------|---------------------------------------|
| Frequency range | 902-928 MHz |
| Average Efficiency | 82.0 % |
| Peak Gain | 1.7 dB |
| Radiation Pattern | Omnidirectional |
| VSWR | < 2:1 |
| Polarization | Linear |
| Weight | 0.2 g |
| Temperature | $-40 \text{ to} + 85^{\circ}\text{C}$ |
| Impedance | 50Ω |
| Dimensions (L x W x H) | 18.0 mm x 7.3 mm x 0.8 mm |

Measures from the evaluation board (121.0 mm x 48.0 mm x 0.8 mm PCB)

For additional information, please download the user manual from http://www.fractus.com/index.php/fractus/documentation or contact info@fractus.com.








DATA SHEET · PRODUCTS & SERVICES

Chip antenna for Zigbee, RFID and ISM 868/900



VSWR and Total Efficiency (%) for 868 MHz band

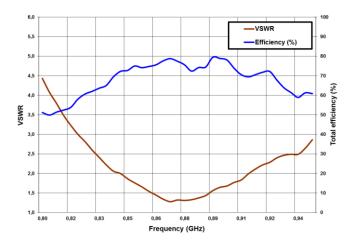

| 868 MHz Technical features | |
|----------------------------|---------------------------|
| Frequency | 868 MHz |
| Radiation Efficiency | 78.1 % |
| Peak Gain | 2.3 dB |
| Radiation Pattern | Omnidirectional |
| VSWR | < 2:1 |
| Polarization | Linear |
| Weight (approx.) | 0.2 g |
| Temperature | -40 to + 85 °C |
| Impedance | 50 Ω |
| Dimensions (L x W x H) | 18.0 mm x 7.3 mm x 0.8 mm |

Measures from the evaluation board (121.0 mm x 48.0 mm x 0.8 mm PCB)