

## Cascadable Amplifier 10 to 500MHz

Rev. V6

### Features

- HIGH POWER OUTPUT: +21 dBm (TYP.)
- HIGH THIRD ORDER IP3: +33 dBm (TYP.)
- HIGH EFFICIENCY: 52 mA (TYP.) @ +15 Vdc

### Description


M/A-COM's AM-147 is a coupler feedback amplifier with high intercept and compression points. The use of coupler feedback minimizes noise figure and current in a high intercept amplifier. This amplifier is packaged in a TO-8 package. Due to the internal power dissipation the thermal rise minimized. The ground plane on the PC board should be configured to remove heat from under the package. AM-147 is ideally suited for use where a high intercept, high reliability amplifier is required.

### Ordering Information

| Part Number    | Package       |
|----------------|---------------|
| AM-147-PIN     | TO-8          |
| AMC-147- SMA * | Connectorized |

\* SMA Connectorized part is not RoHs compliant.

### Product Image

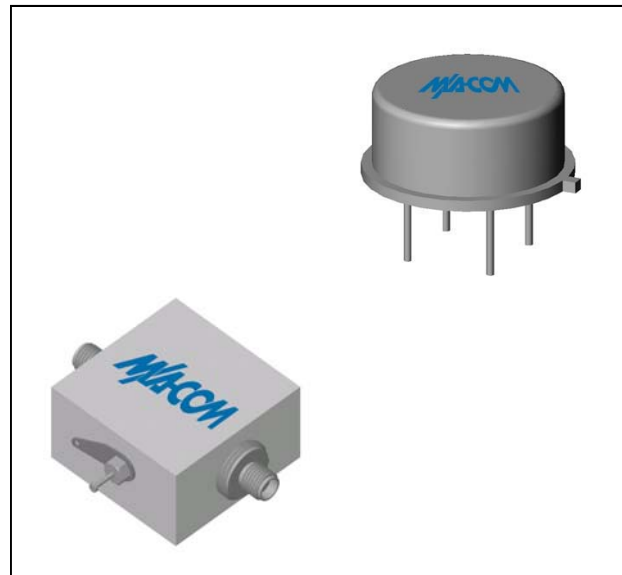

### Electrical Specifications: $Z_0 = 50\Omega$ , $V_{CC} = +15 V_{DC}$

| Parameter                          | Units | Typical       | Guaranteed    |                |
|------------------------------------|-------|---------------|---------------|----------------|
|                                    |       | 25°C          | 0° to 50°C    | -54° to +85°C* |
| Frequency                          | MHz   | 3-500         | 5-500         | 5-500          |
| Small Signal Gain (min)            | dB    | 17.0          | 16.0          | 15.5           |
| Gain Flatness (max)                | dB    | ±0.4          | ±0.8          | ±1.0           |
| Reverse Isolation                  | dB    | 20.0          | 16.0          |                |
| Noise Figure (max)                 | dB    | 3.4           | 4.2           | 4.7            |
| Power Output<br>@ 1 dB comp. (min) | dBm   | 20.0          | 19.0          | 18.5           |
| IP3                                | dBm   | +31           |               |                |
| IP2                                | dBm   | +40           |               |                |
| Second Order Harmonic IP           | dBm   | +46           |               |                |
| VSWR Input / Output (max)          |       | 1.7:1 / 1.7:1 | 1.9:1 / 1.9:1 | 2.0:1 / 2.0:1  |
| DC Current @ 15 Volts (max)        | mA    | 52            | 56            | 58             |

### Absolute Maximum Ratings

| Parameter                                 | Absolute Maximum |
|-------------------------------------------|------------------|
| Storage Temperature                       | -62°C to +150°C  |
| Case Temperature                          | 125°C            |
| DC Voltage                                | +17 V            |
| Continuous Input Power                    | +13 dBm          |
| Short Term Input power<br>(1 minute max.) | 100 mW           |
| Peak Power (3 µsec max.)                  | 0.5 W            |
| "S" Series Burn-In<br>Temperature (case)  | 125°C            |

### Thermal Data: $V_{CC} = +15 V_{DC}$


| Parameter                                        | Rating  |
|--------------------------------------------------|---------|
| Thermal Resistance $\theta_{jc}$                 | 143°C/W |
| Transistor Power Dissipation $P_d$               | 0.47 W  |
| Junction Temperature Rise<br>Above Case $T_{jc}$ | 68°C    |

\* Over temperature performance limits for part number AMC-147, guaranteed from 0°C to +50°C only.


## Cascadable Amplifier 10 to 500MHz

Rev. V6


### Typical Performance Curves at +25°C

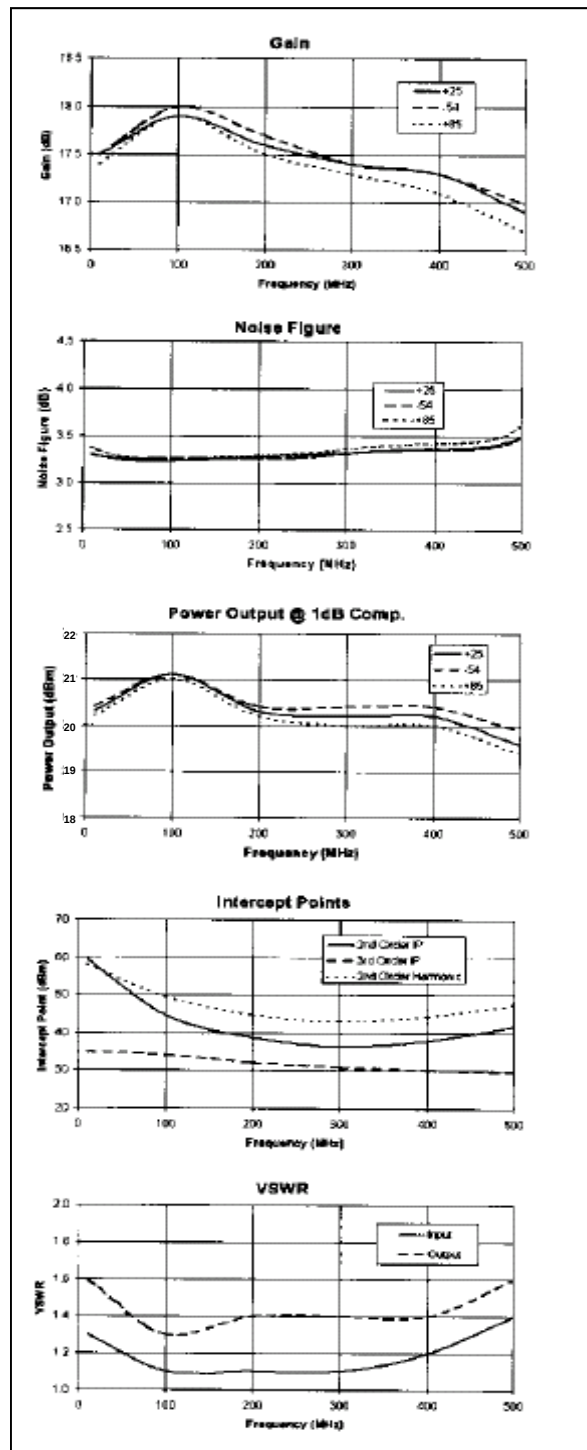

### Outline Drawing: TO-8-1

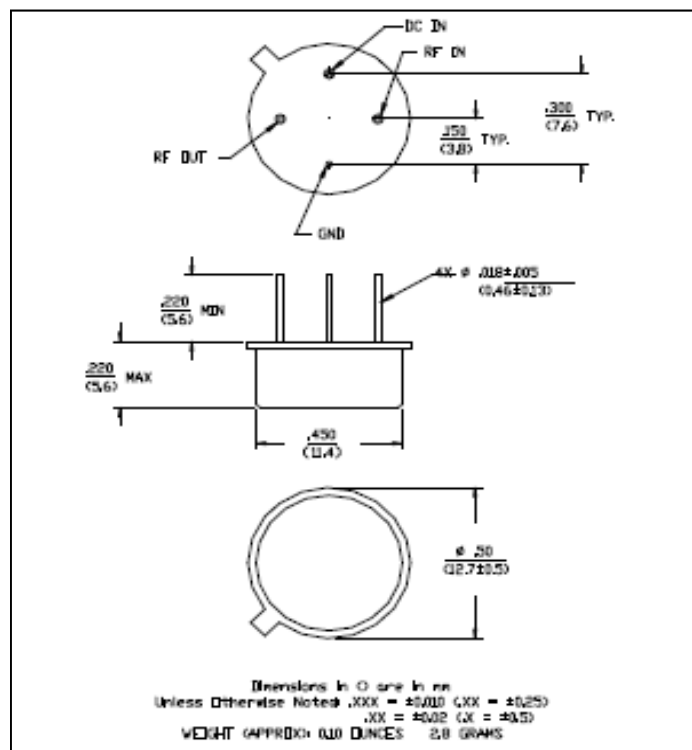

### Outline Drawing: SMA Connectorized \*

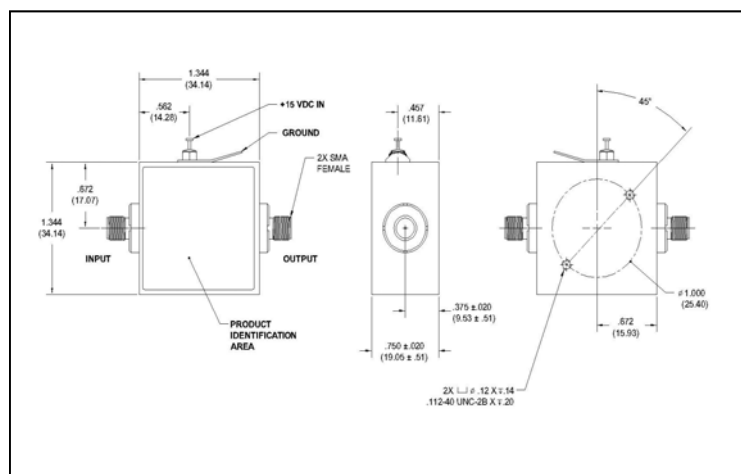

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.