


## FEATURES

- InGaP HBT Technology
- -50 dBc ACPR @  $\pm 5$  MHz, +27 dBm
- 29 dB Gain
- High Efficiency
- Low Transistor Junction Temperature
- Matched for a 50  $\Omega$  System
- Low Profile Miniature Surface Mount Package; RoHS Compliant
- Multi-Carrier Capability

## APPLICATIONS


- WCDMA, HSDPA and LTE Air Interfaces
- Picocell, Femtocell, Home Nodes
- Customer Premises Equipment (CPE)
- Data Cards and Terminals

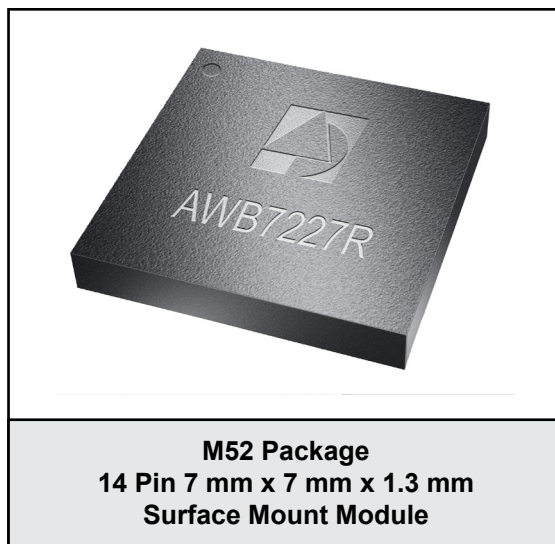

## PRODUCT DESCRIPTION

The AWB7227 is a fully matched, Multi-Chip-Module (MCM) designed for picocell, femtocell, and customer premises equipment (CPE) applications. Its high linearity and efficiency meet the extremely demanding needs of small cell infrastructure architectures. Designed for WCDMA, HSDPA, and LTE air interfaces operating in the 2.11 GHz to 2.17 GHz band, the AWB7227 delivers up to +27 dBm of WCDMA (64 DPCH) power with an ACPR better than -50 dBc. It

operates from a convenient +4.5 V supply and provides 29 dB of gain. The device is manufactured using an advanced InGaP HBT MMIC technology offering state-of-the-art reliability, temperature stability, and ruggedness. The self-contained 7 mm x 7 mm x 1.3 mm surface mount package incorporates RF matching networks optimized for output power, efficiency, and linearity in a 50  $\Omega$  system.

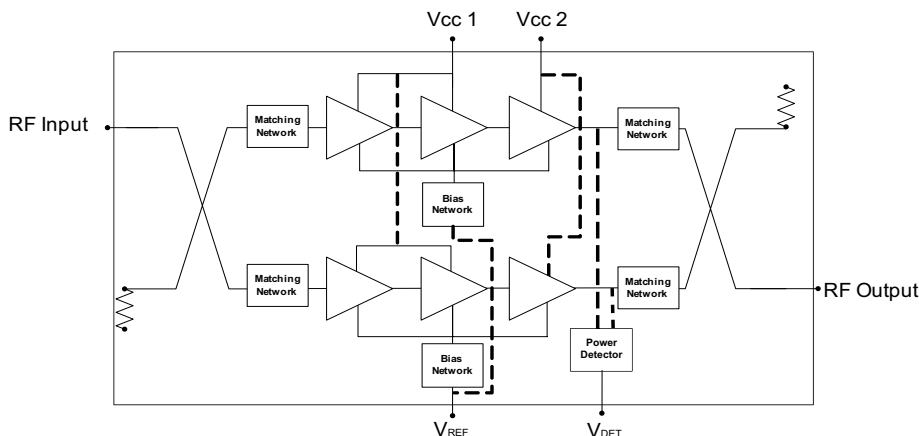

**Figure 1: Block Diagram**

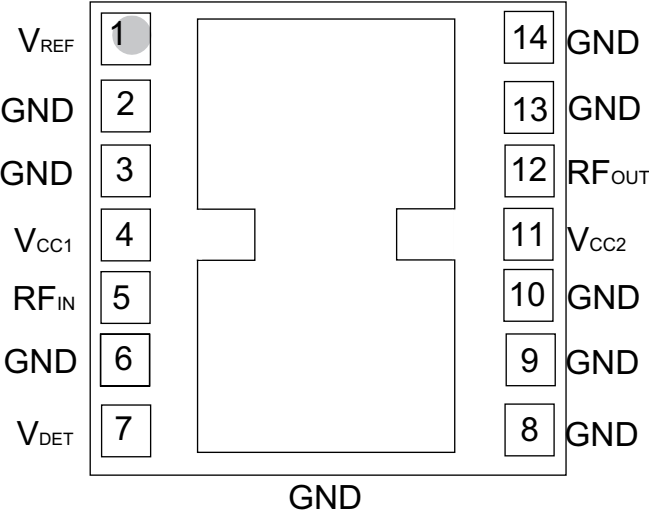


Figure 2: Pinout (X-ray Top View)

Table 1: Pin Description

| PIN | NAME              | DESCRIPTION       |
|-----|-------------------|-------------------|
| 1   | V <sub>REF</sub>  | Reference Voltage |
| 2   | GND               | Ground            |
| 3   | GND               | Ground            |
| 4   | V <sub>CC1</sub>  | Supply Voltage    |
| 5   | RF <sub>IN</sub>  | RF Input          |
| 6   | GND               | Ground            |
| 7   | V <sub>DET</sub>  | Detector Output   |
| 8   | GND               | Ground            |
| 9   | GND               | Ground            |
| 10  | GND               | Ground            |
| 11  | V <sub>CC2</sub>  | Supply Voltage    |
| 12  | RF <sub>OUT</sub> | RF Output         |
| 13  | GND               | Ground            |
| 14  | GND               | Ground            |

## ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

| PARAMETER  | MIN                  | MAX    | UNIT |
|--|----------------------|--------|------|
| Supply Voltage ( $V_{CC}$ )  | 0                    | +5     | V    |
| Reference Voltage ( $V_{REF}$ )  | 0                    | +3.5   | V    |
| RF Output Power ( $P_{OUT}$ )  | -                    | +30    | dBm  |
| ESD Rating<br>Human Body Model <sup>(1)</sup><br>Charged Device Model <sup>(2)</sup> | Class 1C<br>Class IV | -<br>- |      |
| MSL Rating <sup>(3)</sup>  | 4                    | -      |      |
| Junction Temperature ( $T_J$ )   | -                    | +150   | °C   |
| Storage Temperature ( $T_{STG}$ )  | -40                  | +150   | °C   |

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

Notes:

(1) JEDEC JS-001-2010.

(2) JEDEC JESD22-C101D.

(3) 260 °C peak reflow.

Table 3: Operating Ranges

| PARAMETER                       | MIN        | TYP        | MAX           | UNIT | COMMENTS                  |
|---------------------------------|------------|------------|---------------|------|---------------------------|
| Operating Frequency (f)         | 2110       | -          | 2170          | MHz  |                           |
| Supply Voltage ( $V_{CC}$ )     | +3.6       | +4.5       | +4.65         | V    |                           |
| Reference Voltage ( $V_{REF}$ ) | +2.75<br>0 | +2.85<br>- | +2.95<br>+0.5 | V    | PA "on"<br>PA "shut down" |
| RF Output Power ( $P_{OUT}$ )   | -          | +27        | -             | dBm  |                           |
| Case Temperature ( $T_C$ )      | -40        | -          | +85           | °C   |                           |

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

**Table 4: Electrical Specifications**  
**(T<sub>C</sub> = +25 °C, V<sub>CC</sub> = +4.5 V, V<sub>REF</sub> = +2.85 V, 50 Ω system)**

| PARAMETER   | MIN    | TYP        | MAX        | UNIT | COMMENTS  |
|---|--------|------------|------------|------|---|
| Gain <sup>(2)</sup>   | 27     | 29         | 34         | dB   | 2110 - 2170 MHz   |
| ACPR <sup>(1), (2), (3)</sup><br>@ 5 MHz<br>@ 10 MHz              | -<br>- | -50<br>-63 | -47<br>-60 | dBc  | Res BW 100 kHz<br>Res BW 1 MHz  |
| Power-Added Efficiency <sup>(1), (2), (3)</sup>                   | 12     | 14         | -          | %    |   |
| Thermal Resistance (R <sub>JC</sub> ) <sup>(4)</sup>              | -      | 14         | -          | °C/W | Junction to Case  |
| Supply Current <sup>(1), (2), (3)</sup>                           | -      | 795        | 930        | mA   | total through V <sub>CC</sub> pins  |
| Quiescent Current (I <sub>cq</sub> )                              | 230    | 275        | 330        | mA   |   |
| Reference Current   | 12     | 14         | 19         | mA   | through V <sub>REF</sub> pin  |
| Leakage Current   | -      | 3          | 10         | μA   | V <sub>CC</sub> = +5 V, V <sub>REF</sub> = 0 V  |
| Harmonics<br>2f <sub>o</sub><br>3f <sub>o</sub> , 4f <sub>o</sub> | -<br>- | -50<br>-54 | -45<br>-50 | dBc  |   |
| Input Return Loss   | 15     | 20         | -          | dB   |   |
| Output Return Loss  | 15     | 20         | -          | dBm  |   |
| P1dB  | -      | +34.5      | -          | dBm  | CW tone   |
| Spurious Output Level<br>(all spurious outputs)                   | -      | -          | -60        | dBc  | P <sub>OUT</sub> ≤ +27 dBm<br>In-band load VSWR < 5:1<br>Out-of-band load VSWR < 10:1<br>Applies over all voltage and<br>temperature operating ranges |
| Load mismatch stress with no<br>permanent degradation or failure  | 8:1    | -          | -          | VSWR | V <sub>CC</sub> = +4.5 V, P <sub>OUT</sub> = +27 dBm<br>Applies over full operating<br>temperature range  |

**Notes:**

(1) ACPR and Efficiency measured at 2140 MHz.

(2) P<sub>OUT</sub> = +27 dBm.

(3) TM1 WCDMA 64 DPCH


(4) Use only V<sub>CC2</sub> (pin 11) current when calculating device junction temperature.

## APPLICATION INFORMATION

To ensure proper performance, refer to all related Application Notes on the ANADIGICS web site:  
<http://www.anadigics.com>

### Shutdown Mode


The power amplifier may be placed in a shutdown mode by applying logic low levels (see Operating Ranges table) to the  $V_{REF}$  voltage.

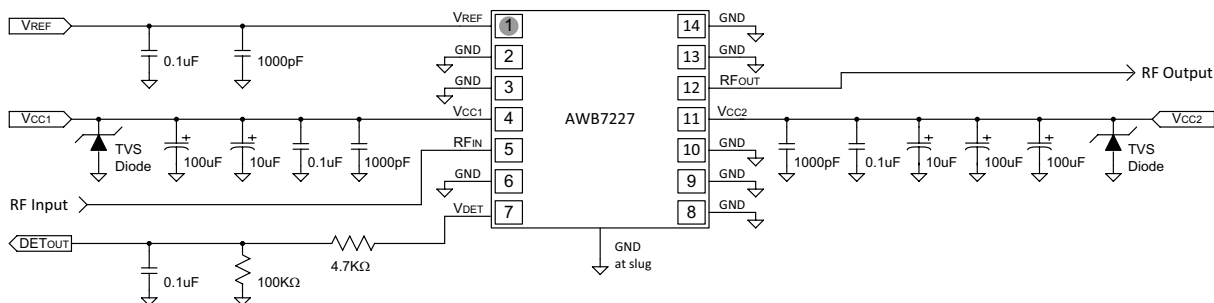

#### Notes:

1. 10uF and 100uF capacitors are optional.
2. Applications that have large supply voltage transients may benefit from the use of TVS diodes. For such applications, recommended TVS diodes are SM05T1G or SMJ5.0A.

**Figure 3: Application Circuit Schematic**

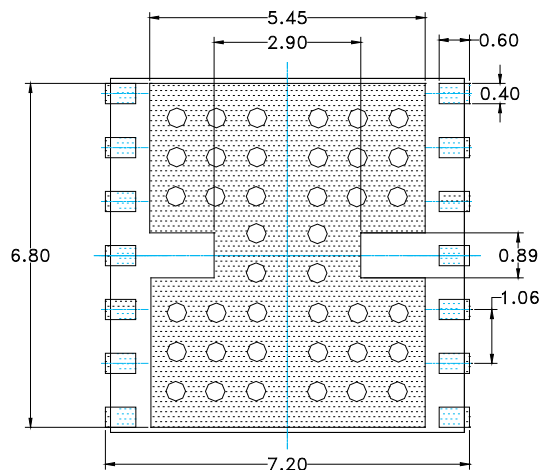


PCB METAL  
TOP (X-RAY) VIEW


ONLY PACKAGE I/O's AND  
GROUND REQUIREMENTS  
SHOWN.

#### NOTES:

- (1) UNLESS SPECIFIED DIMENSIONS ARE SYMMETRICAL ABOUT CENTER LINES SHOWN.
- (2) DIMENSIONS IN MILLIMETERS.
- (3) VIAS SHOWN IN PCB METAL VIEW ARE FOR REFERENCE ONLY. NUMBER & SIZE OF THERMAL VIAS REQUIRED DEPENDENT ON HEAT DISSIPATION REQUIREMENT AND THE PCB PROCESS CAPABILITY.

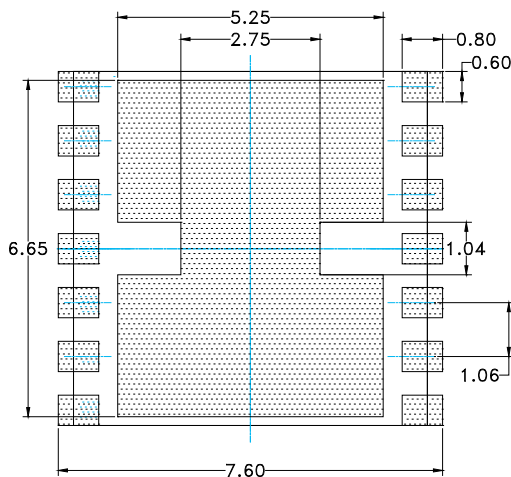


PCB SOLDER MASK  
TOP (X-RAY) VIEW

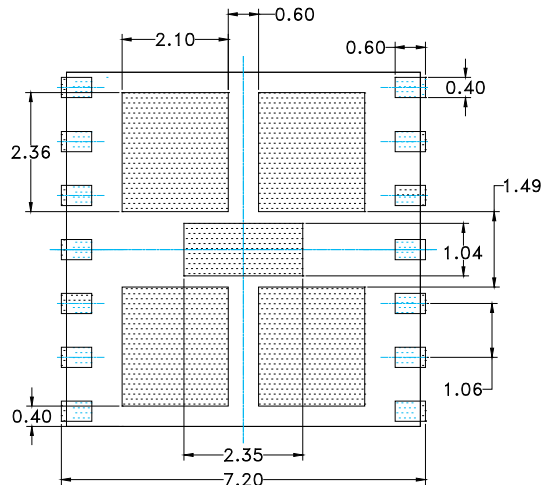

STENCIL APERTURE  
TOP (X-RAY) VIEW

**Figure 4: PCB Footprint**

## PACKAGE OUTLINE

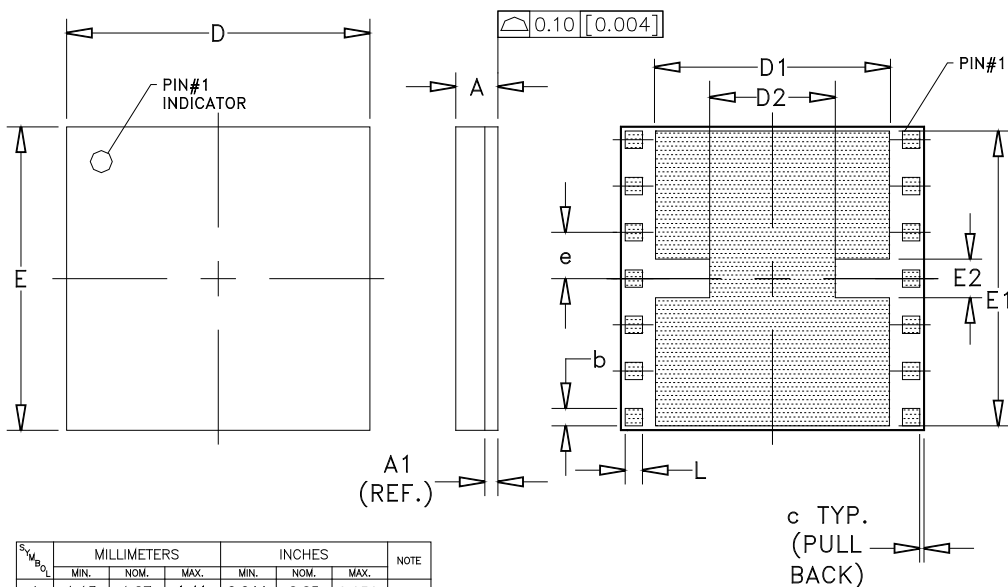

## NOTES:

1. CONTROLLING DIMENSIONS: MILLIMETERS
2. UNLESS SPECIFIED TOLERANCE=±0.076[0.003].
3. PADS (INCLUDING CENTER) SHOWN  
UNIFORM SIZE FOR REFERENCE ONLY.  
ACTUAL PAD SIZE AND LOCATION WILL  
VARY WITHIN MIN. AND MAX. DIMENSIONS  
ACCORDING TO SPECIFIC LAMINATE DESIGN.

Figure 5: M52 Package Outline - 14 Pin 7 mm x 7 mm x 1.3 mm Surface Mount Module


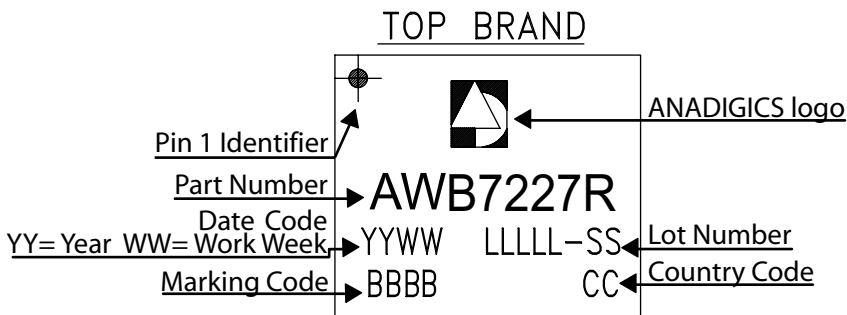


Figure 6: Branding Specification



### Table 5: Tape & Reel Dimensions

| PACKAGE TYPE         | TAPE WIDTH | POCKET PITCH | REEL CAPACITY | MAX REEL DIA |
|----------------------|------------|--------------|---------------|--------------|
| 7 mm x 7 mm x 1.3 mm | 16 mm      | 12 mm        | 2500          | 13"          |



| ORDER<br>NUMBER | TEMPERATURE<br>RANGE | PACKAGE<br>DESCRIPTION  | COMPONENT PACKAGING                 |
|-----------------|----------------------|---|-------------------------------------|
| AWB7227RM52P8   | -40 °C to +85 °C     | RoHS-compliant 14 Pin<br>7 mm x 7 mm x 1.3 mm<br>Surface Mount Module | Tape and Reel, 2500 pieces per Reel |

**ANADIGICS, Inc.**

141 Mount Bethel Road

Warren, New Jersey 07059, U.S.A.

Tel: +1 (908) 668-5000

Fax: +1 (908) 668-5132

URL: <http://www.anadigics.com>**IMPORTANT NOTICE**

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

**WARNING**

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.