

FEATURES

- Supports emerging 802.11ac high-data rate standard
- 1.8% Dynamic EVM @ $P_{OUT} = 22$ dBm with 802.11ac MCS9-HT80 waveform, 5.0 V
- 31 dB of Linear Power Gain @ 5.0 V
- Power Detector with High Accuracy Over 3:1 VSWR
- 1.8 V CMOS Compatible PA Enable Pin
- Single 3.3/5.0 V Supply Voltage
- 50 Ω -Internally Matched RF Ports
- Leadfree and RoHS Compliant
- 4 x 4 x 0.80 mm QFN package

APPLICATIONS

- Access Points
- Media Gateways
- Set top boxes
- Smart TV's

PRODUCT DESCRIPTION

The ANADIGICS AWL5910 WLAN Power Amplifier is an easy to use module that delivers high levels of linearity and efficiency for high data rate applications. Designed for the 5 GHz WLAN standards, it supports IEEE 802.11a/n/ac applications.

Requiring only a single +3 V to +5 V supply and a CMOS compatible 1.8 V enable voltage, the AWL5910 reduces system power consumption by offering a low leakage current while the amplifier is shut down. The detector facilitates accurate power control (± 0.5 dB) over varying load conditions (3:1 VSWR). No external circuits are required for RF impedance matching, thus reducing component costs and making it easy to incorporate the device into new designs.

The AWL5910 is manufactured using an advanced InGaP HBT technology that offers state-of-the-art reliability, temperature stability and ruggedness. It is offered in a 4 x 4 x 0.80 mm surface mount package optimized for a 50 Ω system.

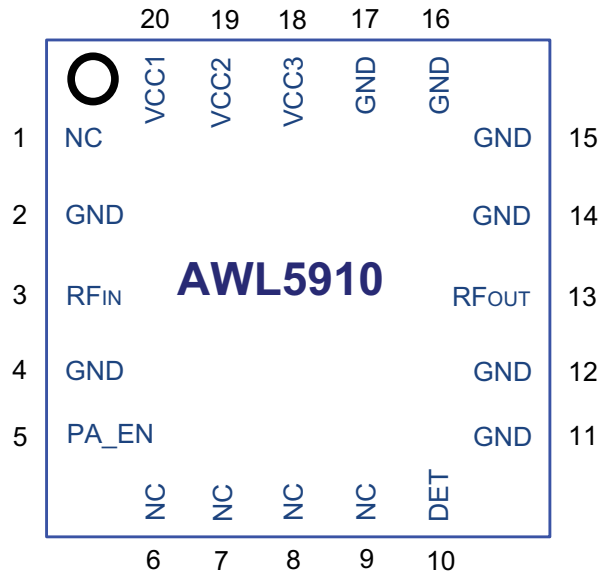


Figure 1: Pinout Diagram

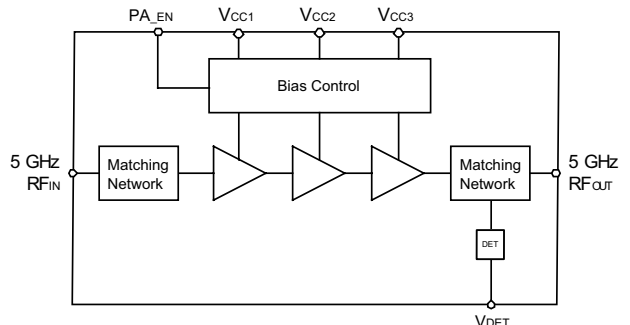


Figure 2: Functional Block Diagram

Table 1: Pin Description

PIN	NAME	DESCRIPTION
1	N/C	No Connection
2	GND	Ground
3	RF _{IN}	Power Amplifier RF input
4	GND	Ground
5	PA_EN	PA Enable Pin
6, 7	N/C	No Connection
8	N/C	No Connection
9	N/C	No Connection
10	DET	Analog Power Detector Output
11, 12	GND	Ground
13	RF _{OUT}	Power Amplifier RF output
14 - 17	GND	Ground
18	VCC3	Third Stage Supply Voltage
19	VCC2	Second Stage Supply Voltage
20	VCC1	First Stage Supply Voltage

ELECTRICAL CHARACTERISTICS

Table 2: Absolute Minimum and Maximum Ratings

PARAMETER	MIN	MAX	UNIT	COMMENTS
DC Power Supply	-	+6.0	V	
PA_EN Voltage	-0.3	+3.6	V	
RFIN, 5 GHz PA	-	+12	dBm	CW
Operating Ambient Temperature	-40	+85	°C	
Storage Temperature	-40	+160	°C	
Storage Humidity	-	60	%	
Junction Temperature	-	150	°C	
ESD _{HBM}	1000	-	V	JEDEC JESD22-A114 all pins
MSL Rating	-	MSL-1	-	

Functional operation to the specified performance is not implied under these conditions. Operation of any single parameter in excess of the absolute ratings may cause permanent damage. No damage occurs if one parameter is set at the limit while all other parameters are set within normal operating ranges.

Table 3: Operating Ranges

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Operating Frequency Ranges	4.9	-	5.925	GHz	802.11a/n/ac
DC Power Supply Voltage (V _{CC})	+3.0	+5.0	+5.25	V	With RF applied
Quiescent Current	-	160	-	mA	No RF
Leakage Current	-	15	-	μA	
PA_EN Current	-	100	200	μA	
PA_EN Voltage	1.8	1.8	3.3	V	Control Voltage High
PA_EN Voltage	0	-	0.5	V	Control Voltage Low
Operating Temperature	-40	-	+85	°C	

The device may be operated safely over these conditions; however, parametric performance is guaranteed only over the conditions defined in the electrical specifications.

Table 4: Electrical Specifications - 5 V Operation
 ($T_c = +25\text{ }^\circ\text{C}$, $V_{CC} = +5.0\text{ V}$, $PA_EN = 1.8\text{ V}$) 802.11ac MCS9-HT80, unless otherwise noted

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Frequency	4.9	-	5.925	GHz	
Output Power ^(1,2)	19	22	-	dBm	-35 dB EVM, 802.11ac, MCS9 - HT80
	-	26	-	dBm	802.11n, MCS0 - HT20
Supply Current (I_{CC})	-	270	-	mA	$P_{OUT} = +22\text{ dBm}$, MCS9 - HT80
Power Gain	-	31	-	dB	
Gain variation over band	-	+/- 1.0	-	dB	
Gain variation over 80 MHz	-	+/- 0.25	-	dB	
Gain at 3.8 GHz	-	+5	-	dB	
1 dB output compression point	-	32	-	dBm	$P_{IN} = \text{CW}$
Input Return Loss	-	-10	-	dB	
Output Spurious Levels - Harmonics					
2 f_o	-	-40	-	dBm/	For Power levels up to 26 dBm OFDM
3 f_o	-	-50	-	MHz	
Rise/Fall Time	-	0.5	-	μs	Within 0.5 dB of final value
Stability	All non-harmonically related outputs < -50 dBc/100 kHz				$P_{OUT} = +26\text{ dBm}$, $V_{CC} = 5\text{ V}$, $V_{SWR} = 6:1$, all phases, CW
Ruggedness	No damage				$P_{IN} = +12\text{ dBm}$, $V_{CC} = 5\text{ V}$, $V_{SWR} = 6:1$, all phases, CW

Notes:


(1) EVM includes system noise floor of 0.8% (-42 dB).

(2) P_{OUT} degraded from 4.9 - 5.15 GHz.

Table 5: Electrical Specifications - 5 GHz TX Mode Power Detector
 (T_c = +25 °C, V_{cc} = +5.0 V, PA_EN = 1.8 V) 802.11ac MCS9-HT80, unless otherwise noted

PARAMETER	MIN	TYP	MAX	UNIT	COMMENTS
Detector Voltage	-	260	-	mV	P _{OUT} = 0 dBm
	-	550	-		P _{OUT} = 14 dBm
	-	780	-		P _{OUT} = 20 dBm
	-	900	-		P _{OUT} = 23 dBm
Total Internal Load Impedance	-	20	-	kΩ	Off State
Output Impedance	-	100	-	Ω	On State
Load Accuracy	-	+/- 0.5	-	dB	Ouput Power variation at 3:1 VSWR all phases
Detector Bandwidth	-	10	-	MHz	Can be adjusted lower with external R and shunt C components

PACKAGE OUTLINE

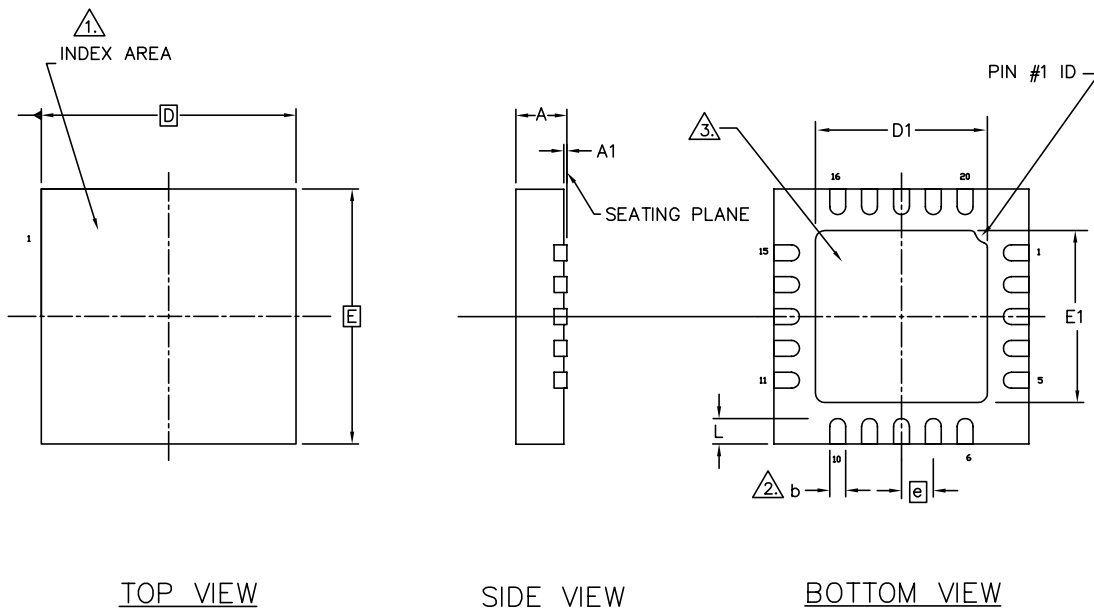


SYMBOL	DIMENSIONS—MM			NOTE
	MIN.	NOM.	MAX.	
A	0.70	0.75	0.80	
A1	0.00	0.02	0.05	
b	0.18	0.25	0.30	
D	3.95	4.00	4.05	
D1	2.55	2.70	2.80	
E	3.95	4.00	4.05	
E1	2.55	2.70	2.80	
e	0.50 BSC			
L	0.30	0.40	0.50	

NOTES :

- 1. TERMINAL #1 IDENTIFIER AND PAD NUMBERING CONVENTION SHALL CONFORM TO JESD 95-1 SPP-012.
- 2. DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30mm FROM TERMINAL TIP.
- 3. BILATERAL COPLANARITY ZONE APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

Figure 3: Package Outline - 20 Pin, 4 x 4 x 0.80 mm QFN

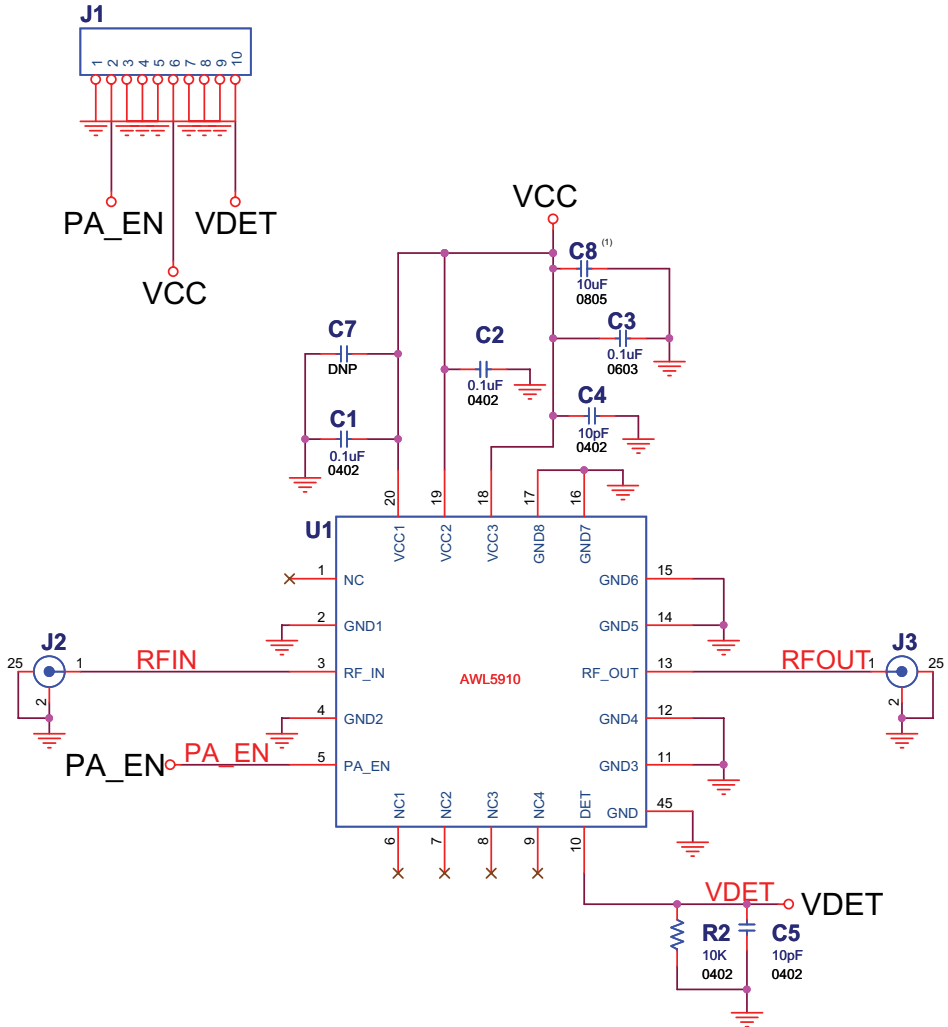

Note:

(1) Capacitor C8 is included on the evaluation board but can be eliminated if sufficient bypassing already exists on the customer's board.

Figure 4: Evaluation Board Schematic

TOP BRAND


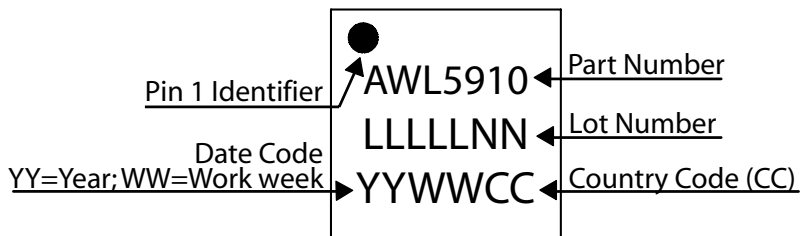


Figure 5: Branding Specification

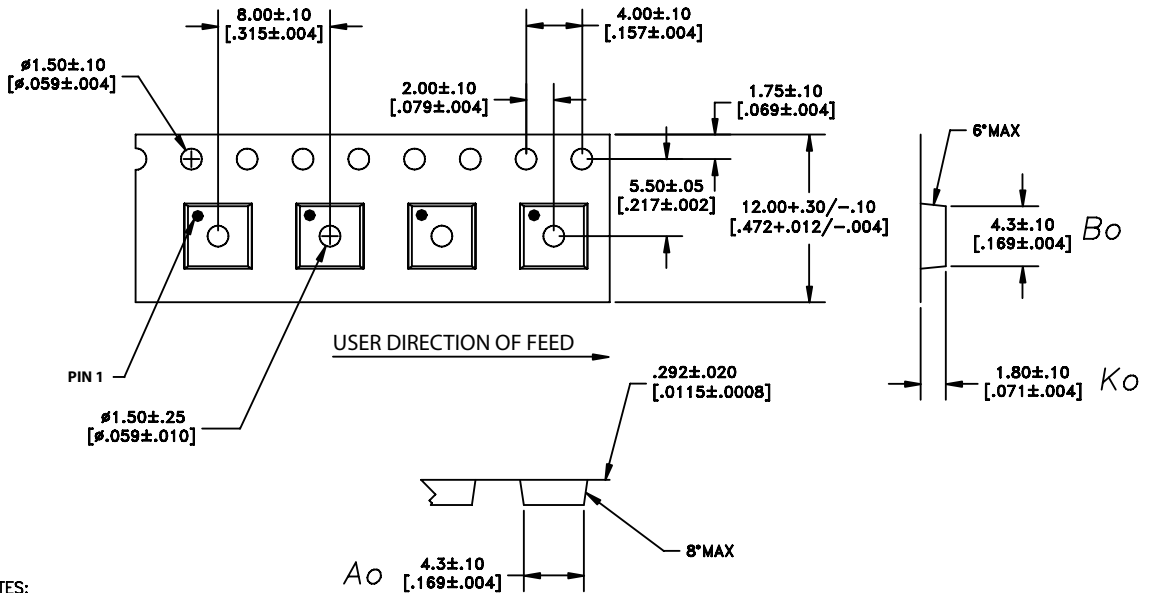


NOTES:

- 1. MATERIAL: 3000 (CARBON FILLED POLYCARBONATE)
100% RECYCLABLE.

DIMENSIONING AND TOLERANCING PER ASME Y14.5M

Figure 6: Carrier Tape

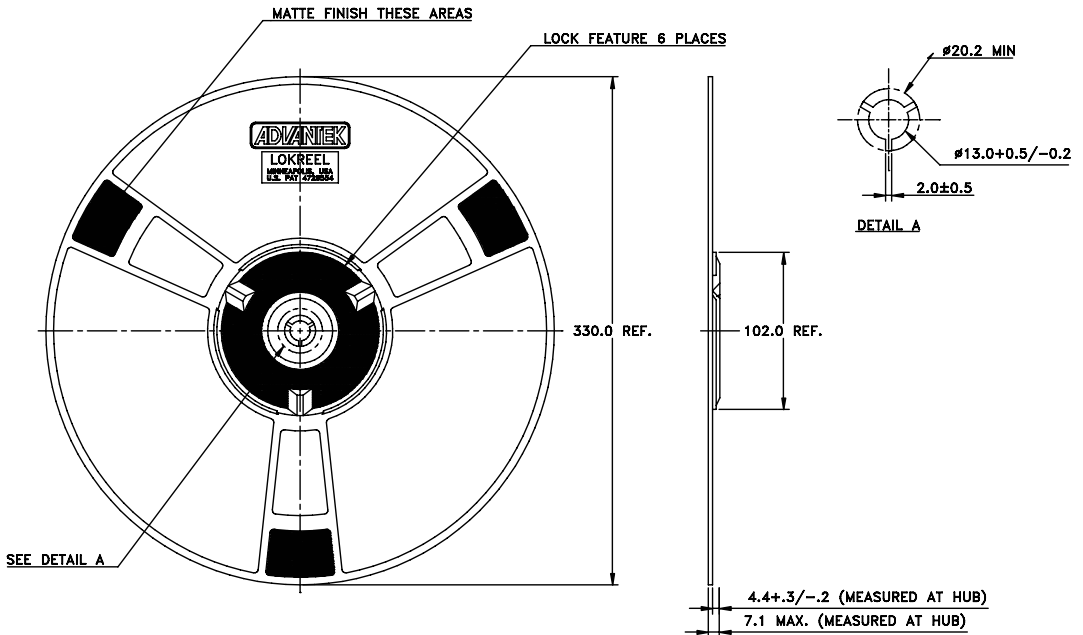

NOTES:

- 1. SURFACE RESISTIVITY: $\leq 10^8$ ohms/square ASTM D-257
- MATERIAL: HIGH IMPACT POLYSTYRENE
- SHELF LIFE: INDEFINITE
- COLOR: BLACK

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

Figure 7: Reel

ORDERING INFORMATION

ORDER NUMBER	TEMPERATURE RANGE	PACKAGE DESCRIPTION	COMPONENT PACKAGING
AWL5910P7	-40 °C to +85 °C	20 pin, 4 x 4 x 0.80 mm Surface Mount Module	Bags
AWL5910P8	-40 °C to +85 °C	20 pin, 4 x 4 x 0.80 mm Surface Mount Module	2500 piece T/R
AWL5910P9	-40 °C to +85 °C	20 pin, 4 x 4 x 0.80 mm Surface Mount Module	Partial Reel
EVB5910	-40 °C to +85 °C	Evaluation Board	Evaluation Board

**ANADIGICS, Inc.**

141 Mount Bethel Road
Warren, New Jersey 07059, U.S.A.

Tel: +1 (908) 668-5000

Fax: +1 (908) 668-5132

URL: <http://www.anadigics.com>

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or to discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data Sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibilities for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, devices or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.