

10-16 GHz Medium Power Amplifier

GaAs Monolithic Microwave IC


Description

The CHA5266-99F is a three stage monolithic GaAs Medium Power Amplifier that produces 23dB linear gain and 36dBm OIP3.

It is designed for a wide range of applications, from military to commercial communication systems.


The circuit is manufactured with a pHEMT process, 0.25µm gate length, via holes through the substrate, air bridges and electron beam gate lithography.

It is available in chip form.

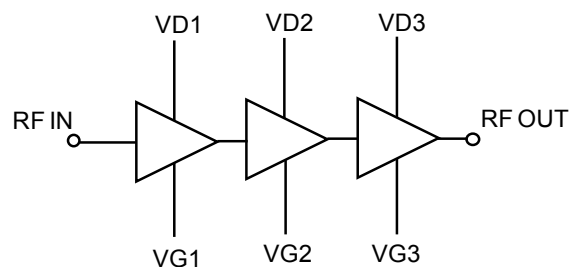

Main Features

- Broadband performances: 10-16GHz.
- 23dB Linear Gain.
- 26.5dBm output power @ 1dB comp.
- 36dBm OIP3.
- DC bias: Vd=5.0Volt@Id=360mA.
- Chip size 1.81x1.37x0.1mm.

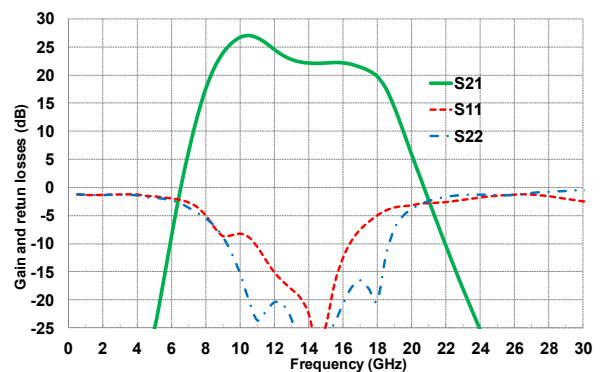

Main Electrical Characteristics

Tamb.= +25°C

Symbol	Parameter	Min	Typ	Max	Unit
Freq	Frequency range	10		16	GHz
Gain	Linear Gain		23		dB
OIP3	Output IP3		36		dBm
Pout	Output Power @1dB comp.		26.5		dBm

Electrical Characteristics

Tamb.= +25°C, Vd = +5.0V

Symbol	Parameter	Min	Typ	Max	Unit
Freq	Frequency range	10		16	GHz
Gain	Linear Gain		23		dB
RL_in	Input Return Loss		12		dB
RL_out	Output Return Loss		15		dB
P1dB	Output power @ 1dB compression		26.5		dBm
Psat	Saturated output power		27.5		dBm
OIP3	Output IP3		36		dBm
NF	Noise Figure		5.5		dB
Idq	Quiescent Drain current		360		mA
Vg	Gate Voltage		-0.35		V

These values are representative of on-wafer measurements that are made without bonding wires at the RF ports.

A bonding wire of typically 0.1 to 0.15nH will improve the matching at the accesses.

Absolute Maximum Ratings ⁽¹⁾

Tamb.= +25°C

Symbol	Parameter	Values	Unit
Vd	Drain bias voltage	7V	V
Idq	Drain bias current	0.45	A
Vg	Gate bias voltage	-2 to 0	V
Pin	Input continuous power	20	dBm
Tj	Junction temperature	175	°C
Ta	Operating temperature range	-40 to +85	°C
Tstg	Storage temperature range	-55 to +150	°C

⁽¹⁾ Operation of this device above anyone of these parameters may cause permanent damage.

Typical Bias Conditions

Tamb.= +25°C

Symbol	Pad N°	Parameter	Values	Unit
VD1	23	DC Drain voltage 1 st stage	5	V
VD2	21	DC Drain voltage 2nd stage	5	V
VD3	19	DC Drain voltage 3rd stage	5	V
VG1	8	DC Gate voltage 1 st stage	-0.35	V
VG2	10	DC Gate voltage 2nd stage	-0.35	V
VG3	12	DC Gate voltage 3rd stage	-0.35	V



Typical on wafer Sij parameters

Tamb. = +25°C, Vd = +5.0V, Id = 320mA

Freq (GHz)	S11 (dB)	PhS11 (°)	S21 (dB)	PhS21 (°)	S12 (dB)	PhS12 (°)	S22 (dB)	PhS22 (°)
1.0	-0.9	151.4	-59.0	96.0	-70.0	-164.3	-1.0	153.4
2.0	-1.0	123.9	-49.2	-63.4	-73.7	-15.5	-1.1	126.2
3.0	-1.1	97.2	-53.2	-16.8	-73.9	-91.5	-1.3	96.7
4.0	-1.2	71.4	-45.6	40.0	-71.7	160.2	-1.4	63.1
5.0	-1.5	45.9	-25.9	94.5	-65.0	84.9	-1.6	24.4
6.0	-1.8	20.0	-6.9	46.4	-68.1	-99.9	-2.0	-18.9
7.0	-2.6	-7.7	7.3	-25.3	-72.0	-57.1	-2.9	-64.3
8.0	-4.5	-35.4	17.7	-113.2	-67.2	-16.3	-4.5	-108.8
9.0	-7.4	-51.2	24.6	145.8	-58.1	-43.7	-7.7	-152.3
10.0	-8.8	-60.8	26.3	45.3	-54.6	-63.9	-13.9	164.3
11.0	-9.6	-80.1	25.4	-35.8	-50.3	-100.1	-39.3	118.5
12.0	-10.7	-99.7	24.4	-102.5	-47.1	-128.8	-19.0	-78.8
13.0	-12.8	-139.9	23.6	-168.6	-44.3	-165.4	-17.5	-125.0
14.0	-21.4	-175.2	22.1	130.7	-44.9	168.1	-25.8	-101.1
15.0	-24.0	-53.1	20.7	74.6	-43.2	148.1	-18.4	-52.0
16.0	-13.0	-103.2	20.7	17.4	-47.8	117.2	-13.5	-68.1
17.0	-9.8	-140.8	20.7	-50.8	-43.1	127.8	-11.6	-91.6
18.0	-7.1	-178.0	19.0	-137.8	-43.3	70.2	-13.1	-54.4
19.0	-4.8	150.4	12.6	135.1	-53.6	19.7	-5.9	-73.2
20.0	-3.3	118.6	3.8	69.2	-58.0	172.1	-4.4	-94.9
21.0	-2.4	92.7	-4.7	23.6	-50.6	49.8	-3.8	-111.2
22.0	-1.9	71.4	-12.3	-19.1	-51.2	82.8	-3.6	-122.6
23.0	-1.4	52.8	-20.4	-56.1	-55.6	69.3	-3.7	-131.3
24.0	-1.1	36.2	-28.1	-89.0	-50.2	-115.7	-3.6	-138.3
25.0	-1.0	21.6	-35.8	-115.0	-51.8	-78.2	-3.4	-145.2
26.0	-1.0	8.4	-39.8	-147.1	-57.4	-133.4	-3.4	-152.8
27.0	-1.0	-3.3	-41.7	-171.5	-43.7	160.7	-3.6	-158.9
28.0	-1.0	-13.8	-43.3	139.2	-44.5	129.2	-3.7	-162.4
29.0	-1.2	-23.7	-43.1	146.5	-44.3	138.4	-3.5	-166.8
30.0	-1.3	-32.4	-38.8	129.4	-42.3	130.8	-3.3	-172.0
31.0	-1.5	-40.0	-38.3	105.2	-38.8	98.8	-3.4	-176.7
32.0	-1.6	-46.8	-38.3	79.3	-38.5	74.0	-3.4	177.7
33.0	-1.6	-52.6	-37.9	52.1	-37.8	53.6	-3.6	174.3
34.0	-1.3	-59.8	-40.6	40.3	-42.1	47.8	-3.4	171.1
35.0	-1.6	-68.1	-39.2	41.1	-39.3	45.1	-3.0	165.0
36.0	-1.9	-72.8	-42.6	-11.1	-42.8	10.2	-2.8	158.7
37.0	-1.6	-76.8	-50.9	-13.7	-45.1	-13.0	-2.6	151.0
38.0	-1.3	-84.4	-60.5	69.1	-47.6	54.2	-2.5	142.1
39.0	-1.8	-92.7	-45.0	61.5	-46.1	46.9	-2.5	132.5
40.0	-2.0	-97.8	-49.0	2.5	-45.7	24.0	-2.3	119.4



Typical test fixture Measurements

Tamb = +25°C, Vd = +5.0V, Id = 360mA

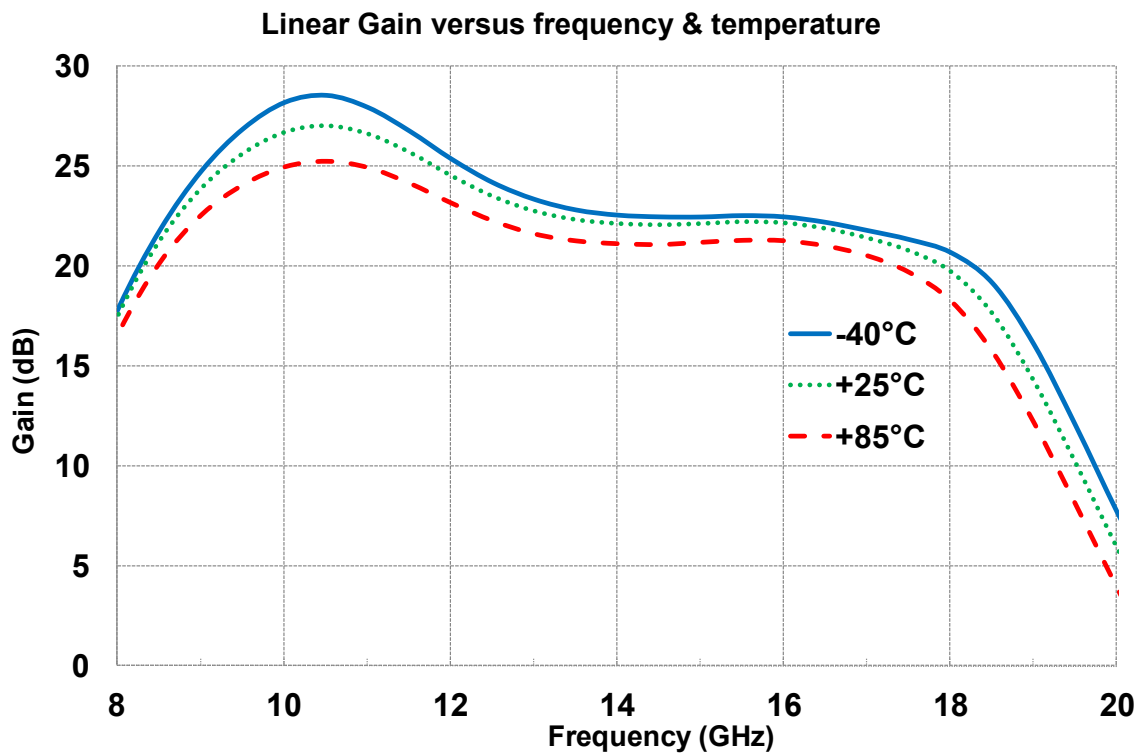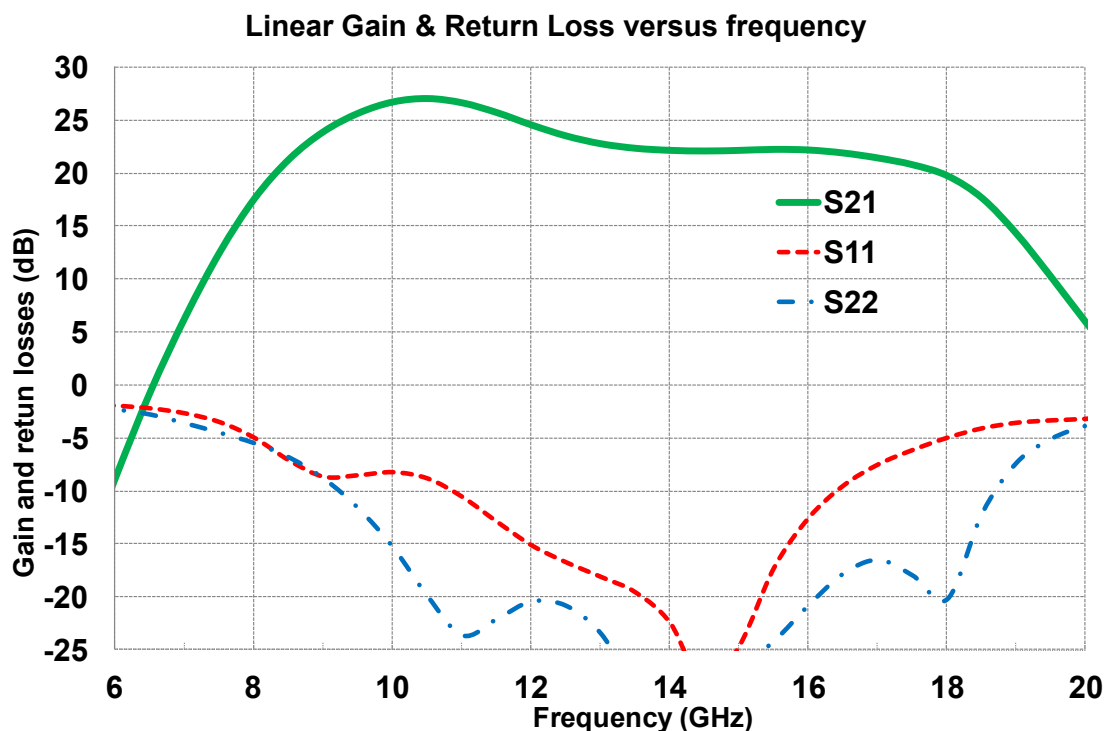

Typical test fixture Measurements


Vd = +5.0V, Id = 360mA

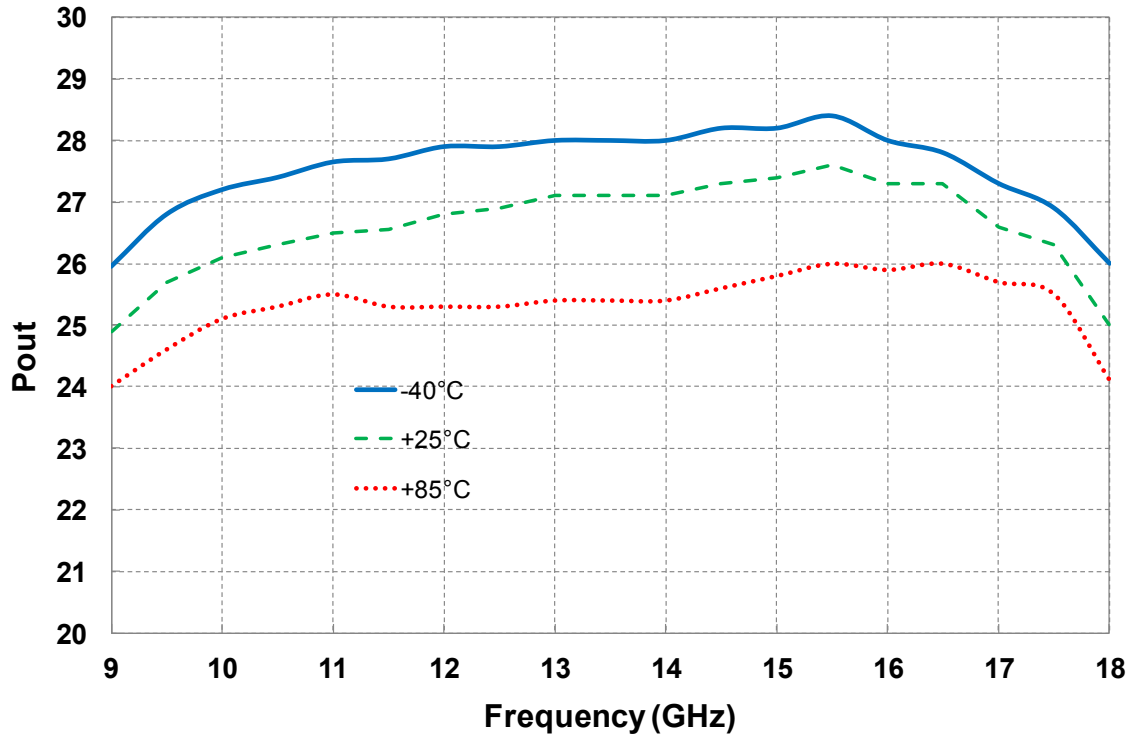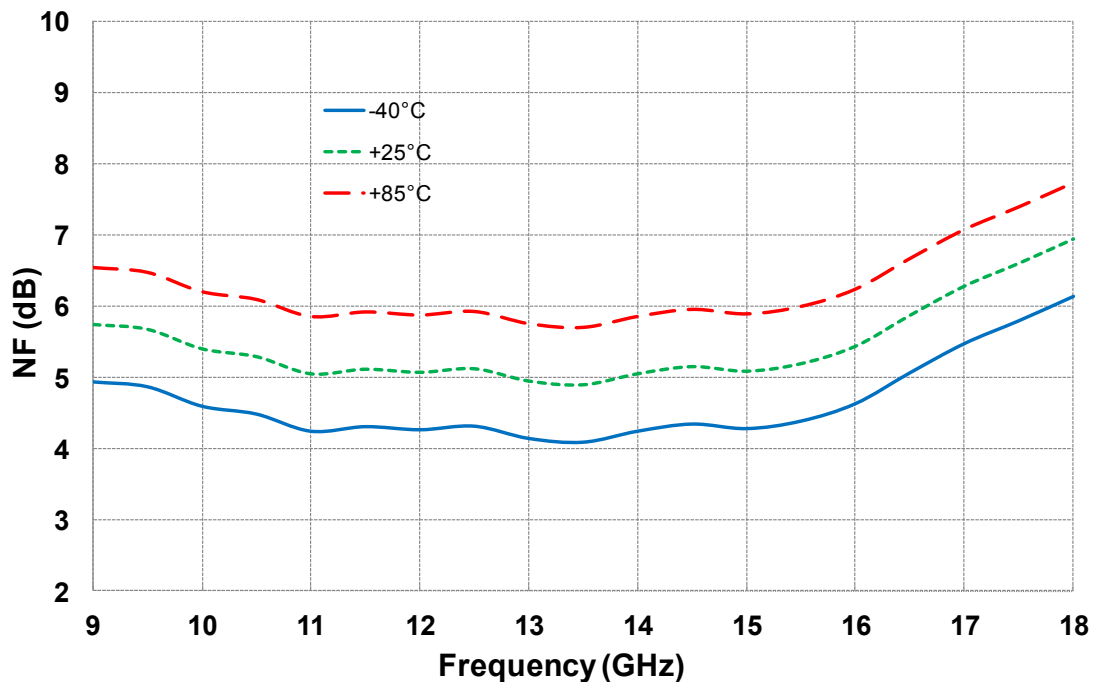Output Power at 1dB compression versus frequency & temperature**Noise Figure versus frequency & temperature**


Typical test fixture Measurements

Tamb. = +25°C, Vd = +5.0V, Id = 360mA

Output IP3 versus output power & frequency

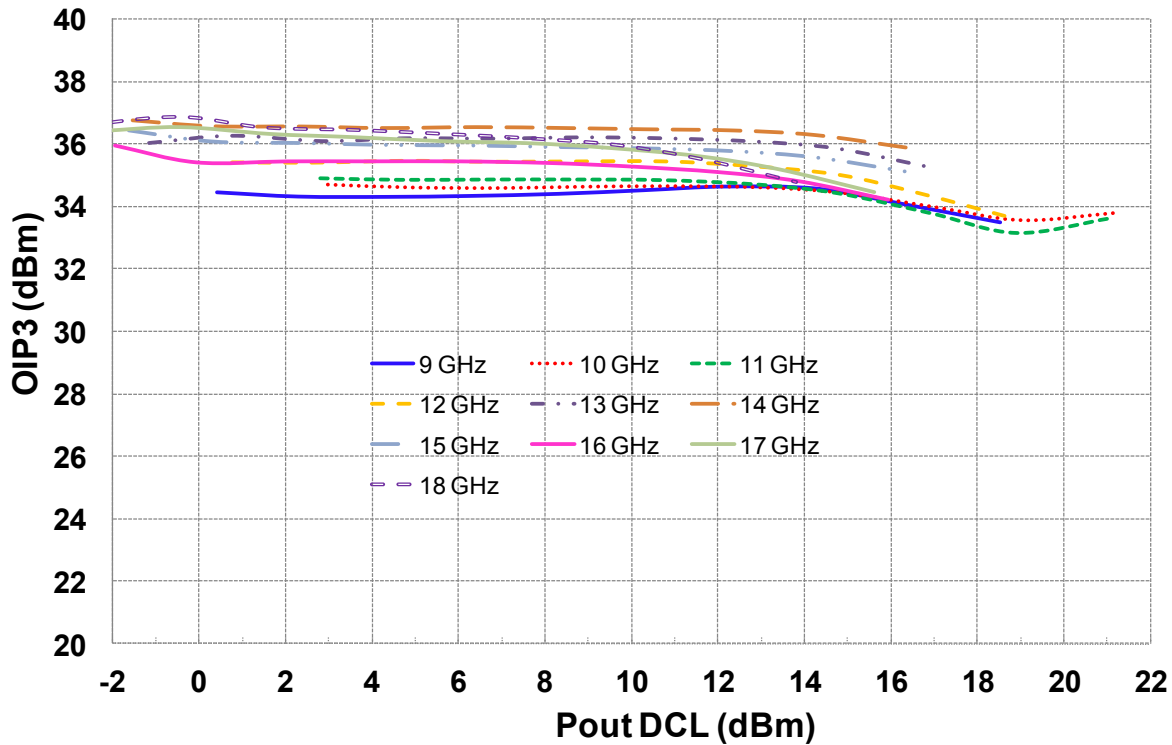


C/I3 versus Pout DCL & frequency

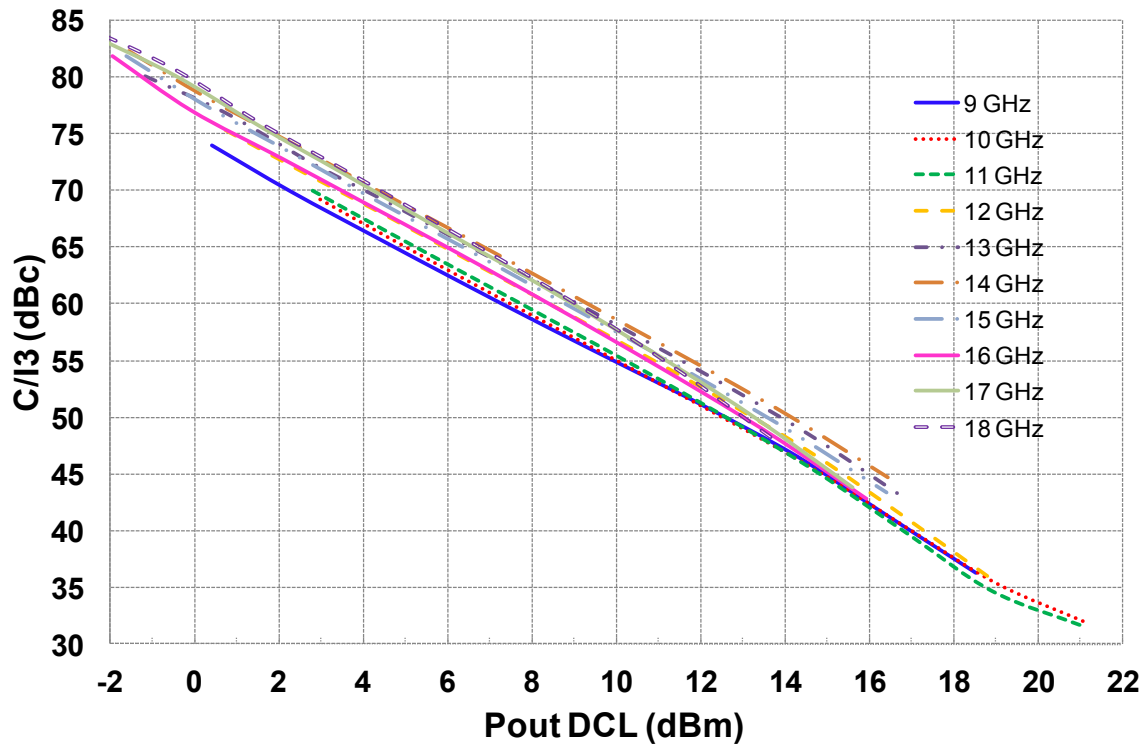


Typical Board Measurements

Vd = +5.0V, Id = 360mA

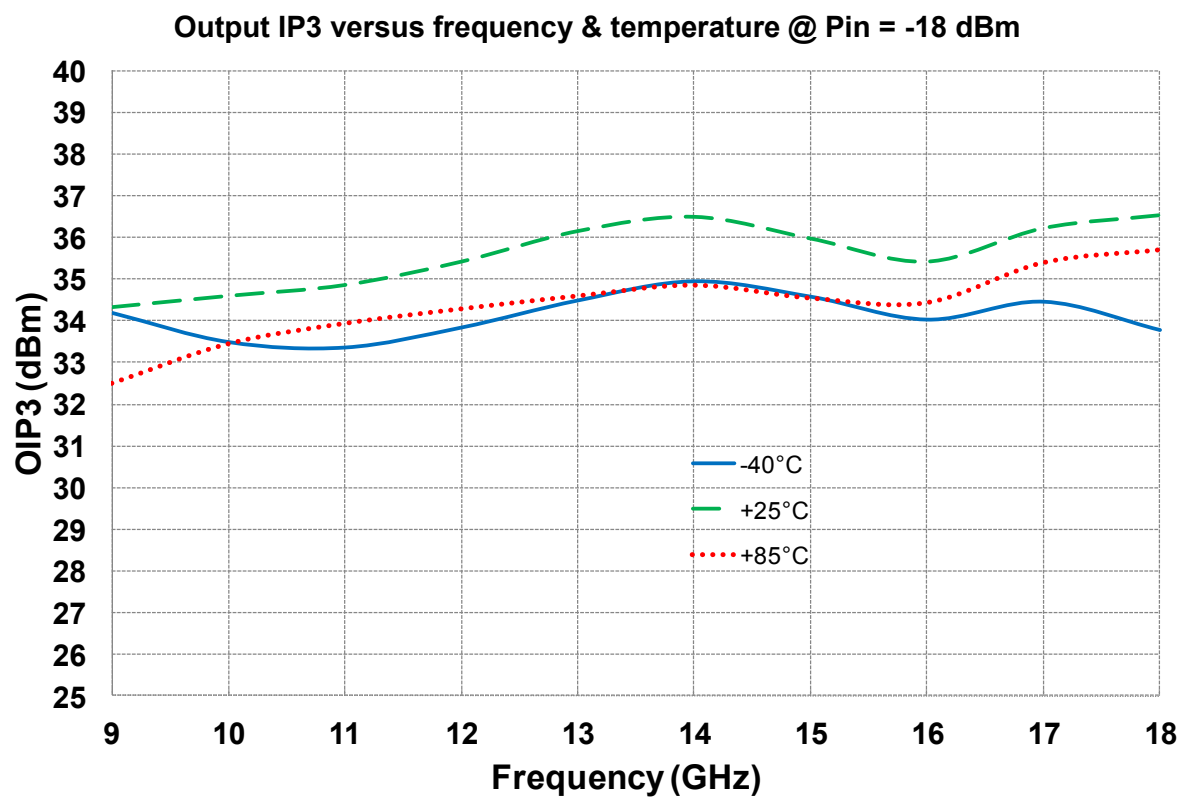

Mechanical data

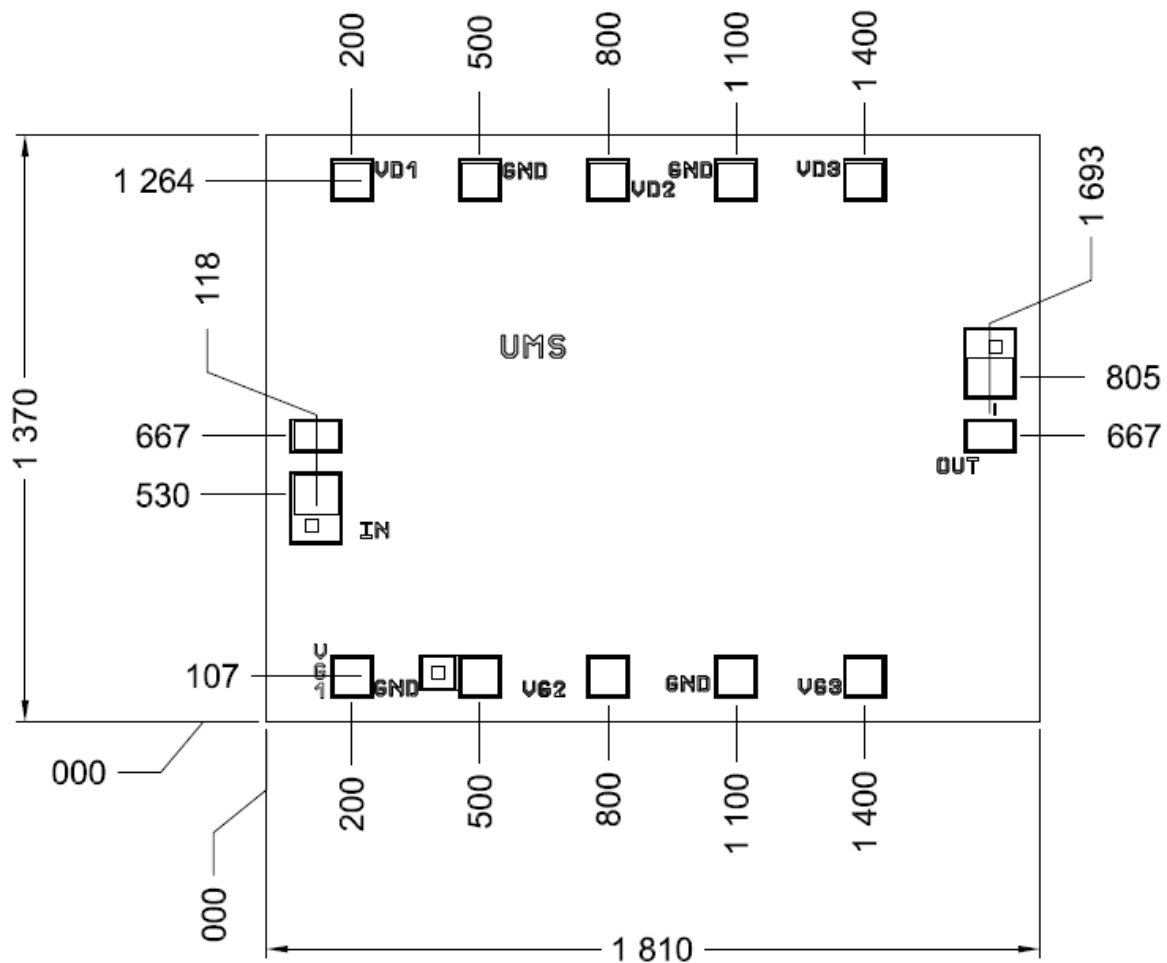

All dimensions are in micrometers


Chip size = 1810x1370 ±35μm

Chip thickness = 100μm ±10μm

RF pads = 110 x 72μm²

DC pads = 100 x 100μm²

Chip width and length are given with a tolerance of ±35μm

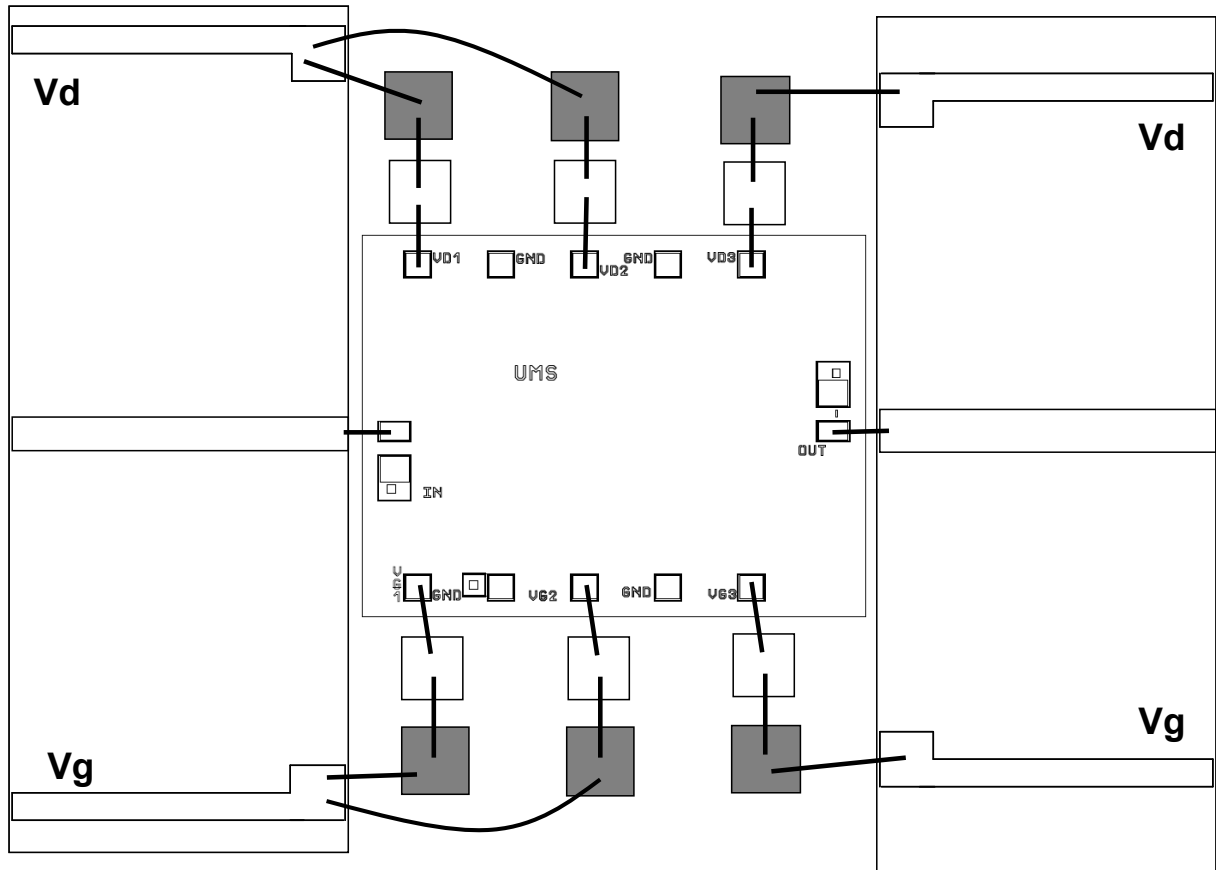Recommended assembly plan**C1=120pF****C2=10nF****Note:**


Supply feed should be bypassed.

25μm wedge bonding is preferred.

Recommended circuit bonding table

Label	Type	Decoupling	Comment
IN, OUT	RF	Not required	Inductance (L _{bonding}) = 0.3nH 400μm length with a wire diameter of 25 μm
Vd1, Vd2, Vd3	Vd	120pF & 10nF	Drain Supply
Vg1, Vg2, Vg3	Vg	120pF & 10nF	Gate Supply

DC Schematic

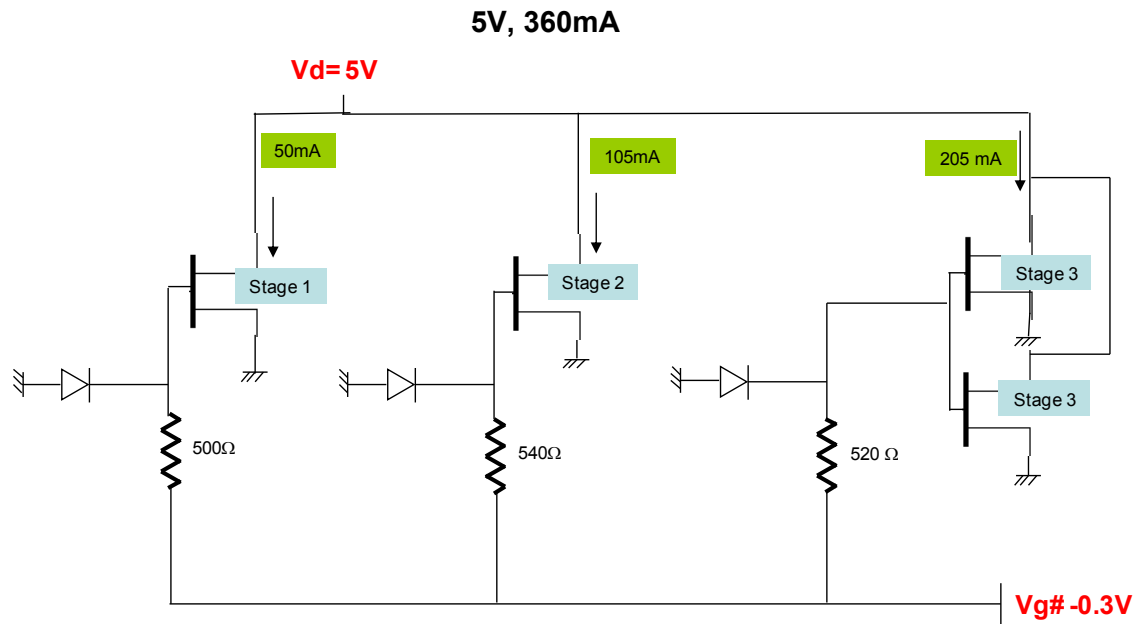

Notes

Recommended ESD management

Refer to the application note AN0020 available at <http://www.ums-gaas.com> for ESD sensitivity and handling recommendations for the UMS products.

Recommended environmental management

UMS products are compliant with the regulation in particular with the directives RoHS N°2011/65 and REACH N°1907/2006. More environmental data are available in the application note AN0019 also available at <http://www.ums-gaas.com>.

Ordering Information

Chip form:

CHA5266-99F/00

Information furnished is believed to be accurate and reliable. However **United Monolithic Semiconductors S.A.S.** assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of **United Monolithic Semiconductors S.A.S.**. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. **United Monolithic Semiconductors S.A.S.** products are not authorised for use as critical components in life support devices or systems without express written approval from **United Monolithic Semiconductors S.A.S.**