

Applications

- Commercial and military radar
- Communications
- Electronic Warfare (EW)

Product Features

- Frequency Range: 6 - 12 GHz
- Small Signal Gain: 25 dB (mid-band)
- Pout: 33 dBm ($P_{IN} = 19$ dBm)
- PAE: > 25 % CW
- IM3: -22 dBc (23 dBm Pout/Tone)
- Input Return Loss: > 10 dB
- Output Return Loss: > 8 dB
- Bias: $V_D = 25$ V, $I_{DQ} = 100$ mA, $V_G = -2.5$ V Typical
- Package Dimensions: 4.0 x 4.0 x 1.5 mm

General Description


TriQuint's TGA2598-SM is a packaged broadband driver amplifier fabricated on TriQuint's TQGaN25 0.25 μ m GaN on SiC process. Operating from 6 to 12 GHz, the TGA2598-SM achieves 2 W saturated output power with a power-added efficiency of > 25 %, and 25 dB small signal gain.

The TGA2598-SM is available in a low cost, 4x4 mm air-cavity ceramic QFN. The TGA2598-SM is an ideal choice to drive TriQuint's high performing GaN HPAs allowing the user to run both driver and HPA off the same voltage rail.


Both RF ports have integrated DC blocking capacitors and are fully matched to 50 Ohms.

Lead free and RoHS compliant.

Evaluation Boards are available upon request.

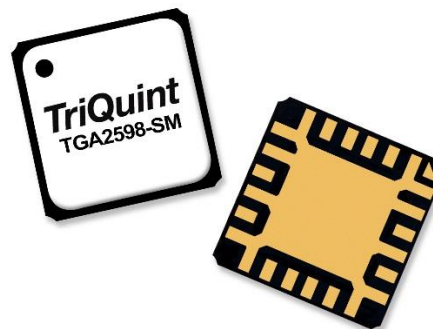

Functional Block Diagram

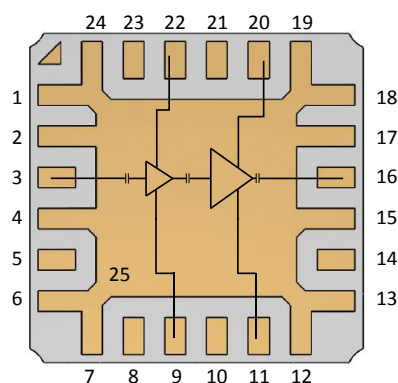

Pin Configuration

Pad No.	Symbol
1, 2, 4, 6, 7, 12, 13, 15, 17-19, 24, 25	GND
3	RF _{IN}
5, 8, 10, 14, 21, 23	NC
9	V _{G1}
11	V _{G2}
16	RF _{OUT}
20	V _{D2}
22	V _{D1}

Ordering Information

Part	ECCN	Description
TGA2598-SM	EAR99	6 - 12 GHz, GaN Driver

Absolute Maximum Ratings

Parameter	Value
Drain Voltage (V_D)	40 V
Gate Voltage Range (V_G)	-8 to 0 V
Drain Current (I_{D1})	128 mA
Drain Current (I_{D2})	260 mA
Gate Current (I_{G1}) at $T_{ch} = 200\text{ }^{\circ}\text{C}$	-0.2 to 1.4mA
Gate Current (I_{G2}) at $T_{ch} = 200\text{ }^{\circ}\text{C}$	-0.6 to 2.8mA
Power Dissipation (P_{DISS}), $85\text{ }^{\circ}\text{C}$	5.3 W
Input Power (P_{IN}), CW, $50\text{ }\Omega$, $V_D=25\text{ V}$, $I_{DQ}=100\text{ mA}$, $85\text{ }^{\circ}\text{C}$,	30dBm
Input Power (P_{IN}), CW, VSWR 10:1, $V_D=25\text{ V}$, $I_{DQ}=100\text{ mA}$, $85\text{ }^{\circ}\text{C}$	30dBm
Channel Temperature (T_{CH})	$275\text{ }^{\circ}\text{C}$
Mounting Temperature (30 Seconds)	$260\text{ }^{\circ}\text{C}$
Storage Temperature	$-55\text{ to }150\text{ }^{\circ}\text{C}$

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

Recommended Operating Conditions

Parameter	Value
Drain Voltage (V_D)	25 V
Drain Current (I_{DQ})	100 mA
Drain Current Under RF Drive (I_{D_DRIVE})	See plots p. 7
Gate Voltage (V_G)	-2.5 V (Typ.)
Gate Current Under RF Drive (I_{G_DRIVE})	See plots p. 7
Temperature (T_{BASE})	$-40\text{ to }85\text{ }^{\circ}\text{C}$

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Test conditions unless otherwise noted: $25\text{ }^{\circ}\text{C}$, $V_D = 25\text{ V}$, $I_{DQ} = 100\text{ mA}$, $V_G = -2.5\text{ V}$ Typical, CW.

Parameter	Min	Typical	Max	Units
Operational Frequency Range	6		12	GHz
Small Signal Gain		25		dB
Input Return Loss		> 10		dB
Output Return Loss		> 8		dB
Output Power (at $P_{in} = 19\text{ dBm}$)		33		dBm
Power Added Efficiency (at $P_{in} = 19\text{ dBm}$)		> 25		%
IM3 (at $P_{out}/\text{tone} = 23\text{ dBm}/\text{Tone}$)		-22		dBc
IM5 (at $P_{out}/\text{tone} = 23\text{ dBm}/\text{Tone}$)		-37		dBc
Small Signal Gain Temperature Coefficient		-0.05		dB/ $^{\circ}\text{C}$
Output Power Temperature Coefficient		-0.007		dBm/ $^{\circ}\text{C}$




Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC}) ⁽¹⁾	$T_{BASE} = 85^{\circ}\text{C}$, $V_D = 25\text{ V}$ (CW)	24.8	$^{\circ}\text{C/W}$
Channel Temperature (T_{CH}) (Under RF drive)	At Freq = 9 GHz, $P_{IN} = 19\text{ dBm}$: $I_{DQ} = 100\text{ mA}$, $I_{D_Drive} = 243\text{ mA}$	189	$^{\circ}\text{C}$
Median Lifetime (T_M)	$P_{OUT} = 33\text{ dBm}$, $P_{DISS} = 4.1\text{ W}$	3.4E+7	Hrs

Notes:







1. Thermal resistance measured to back of package.

Test Conditions: $V_D = 40\text{ V}$; Failure Criteria = 10% reduction in I_{D_MAX}

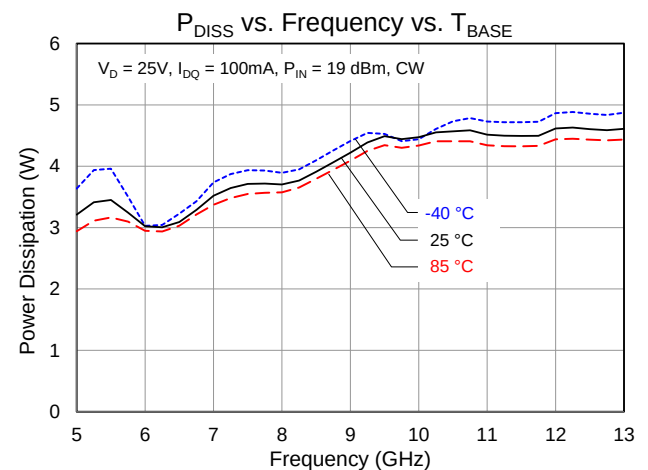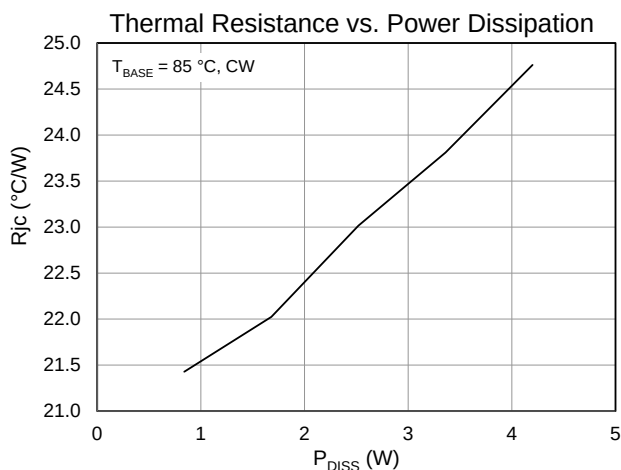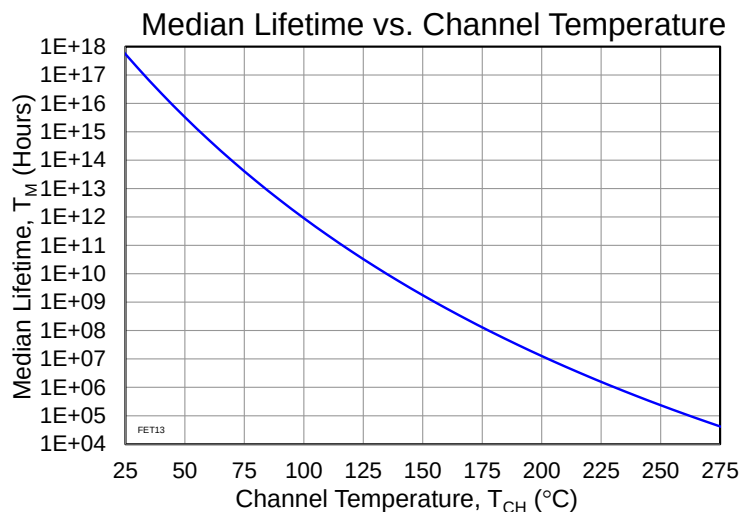







Typical Performance: Small Signal

Conditions unless otherwise specified: $V_D = 25\text{ V}$, $I_{DQ} = 100\text{ mA}$, $V_G = -2.5\text{ V}$ Typical, CW.

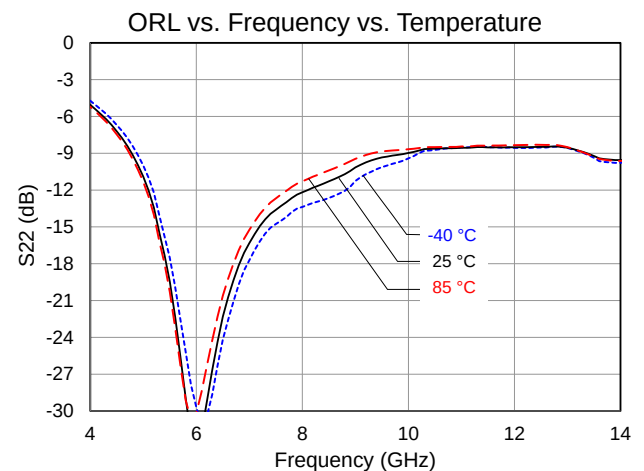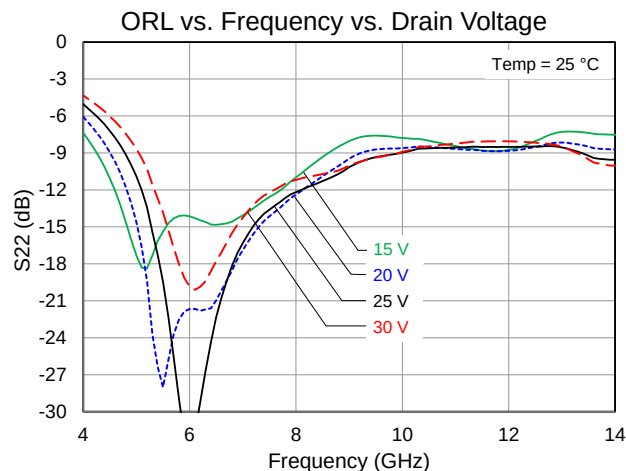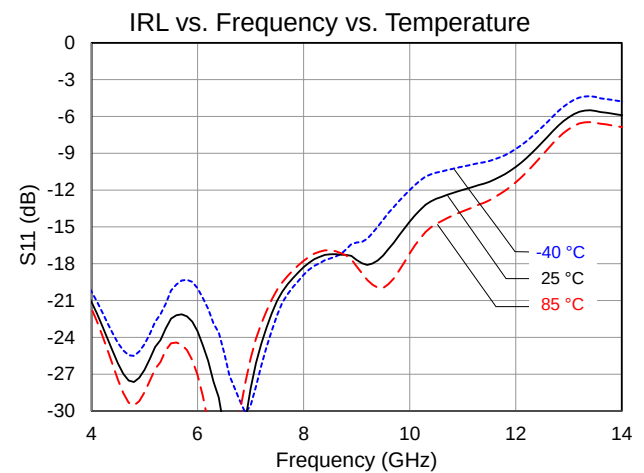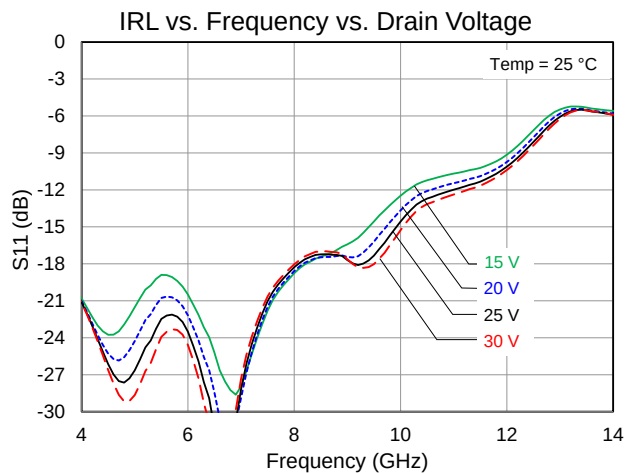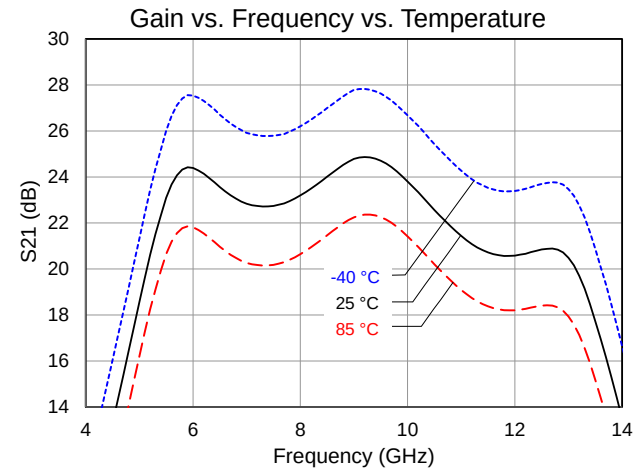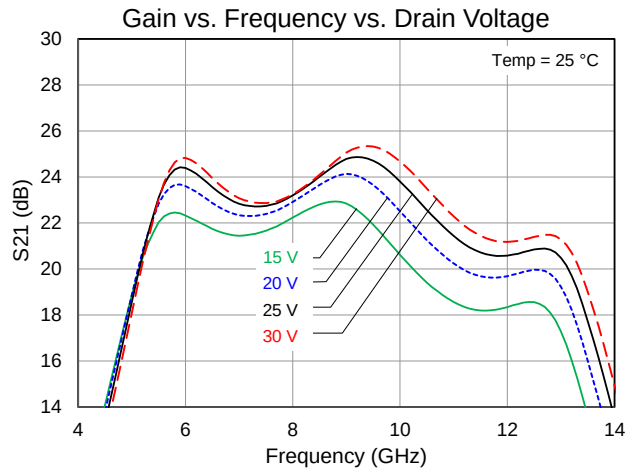







Typical Performance: Large Signal

Conditions unless otherwise specified: $V_D = 25\text{ V}$, $I_{DQ} = 100\text{ mA}$, $V_G = -2.5\text{ V}$ Typical, CW.

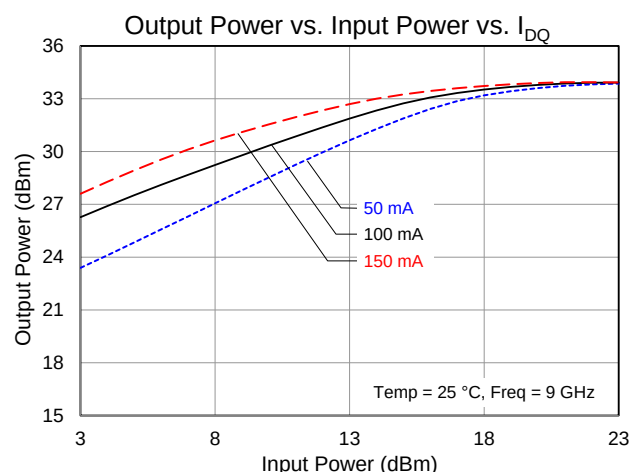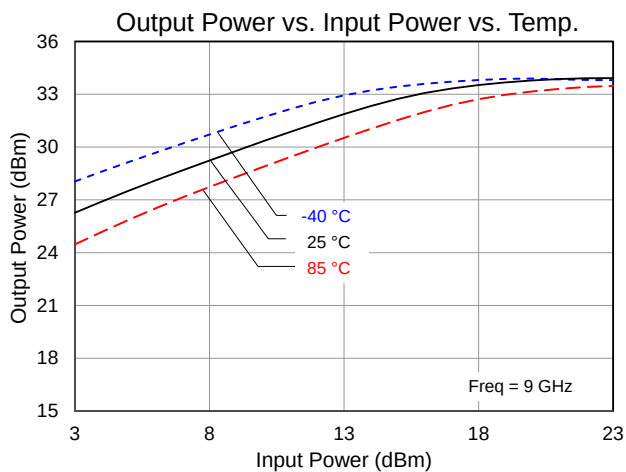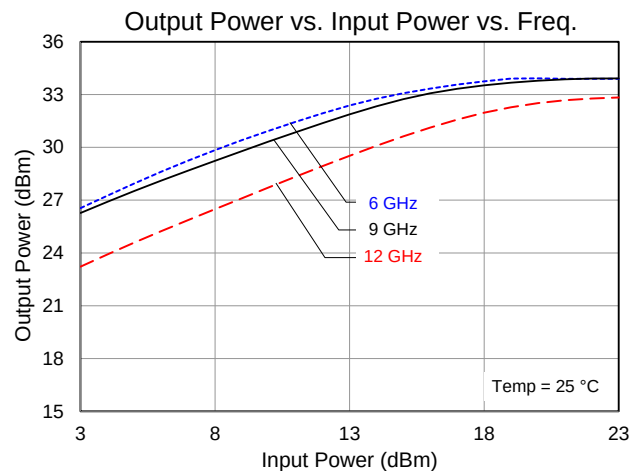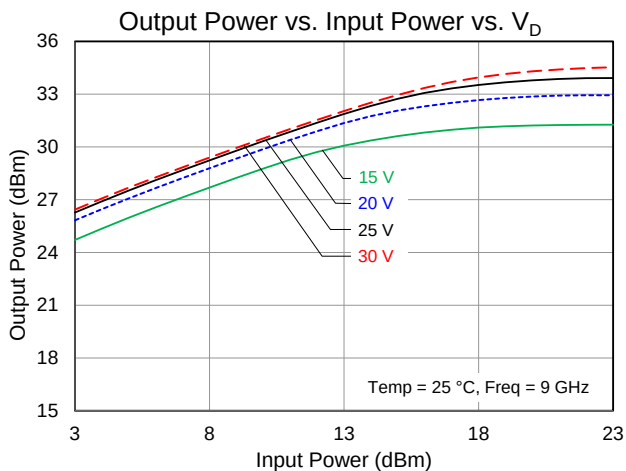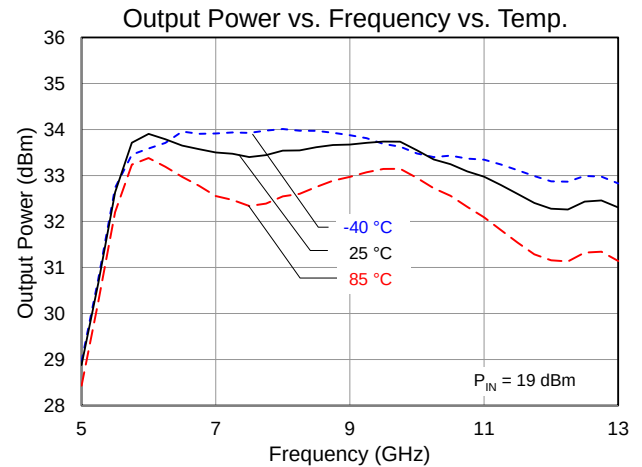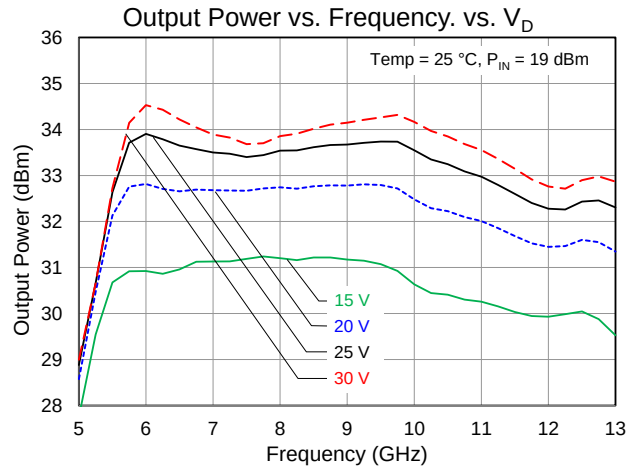






Typical Performance: Large Signal

Conditions unless otherwise specified: $V_D = 25\text{ V}$, $I_{DQ} = 100\text{ mA}$, $V_G = -2.5\text{ V}$ Typical, CW.

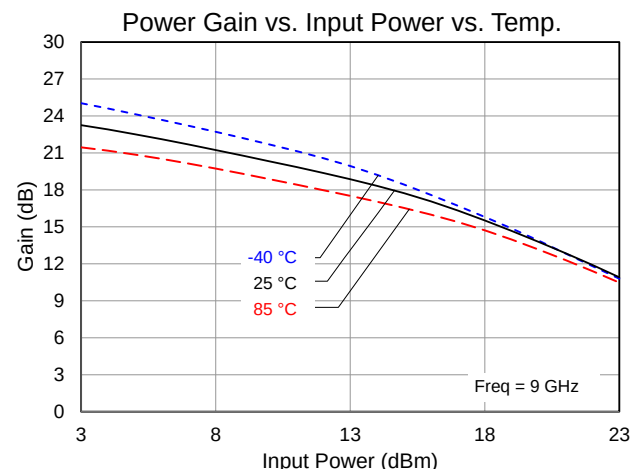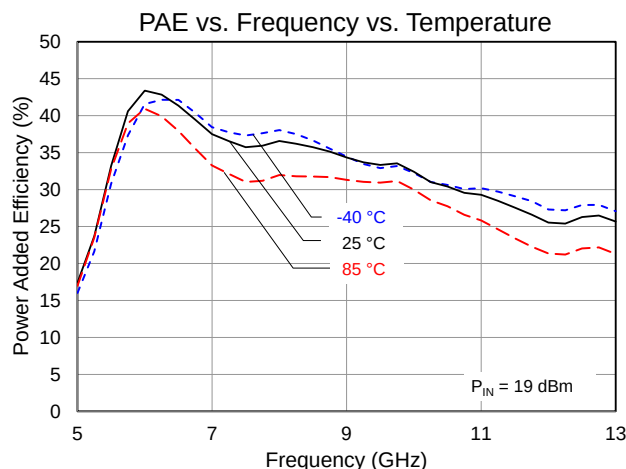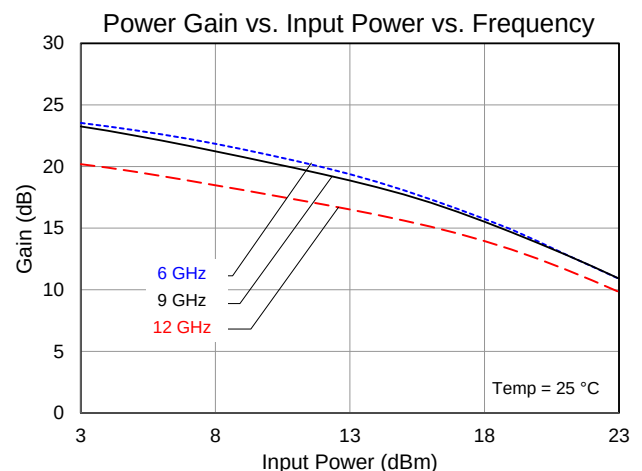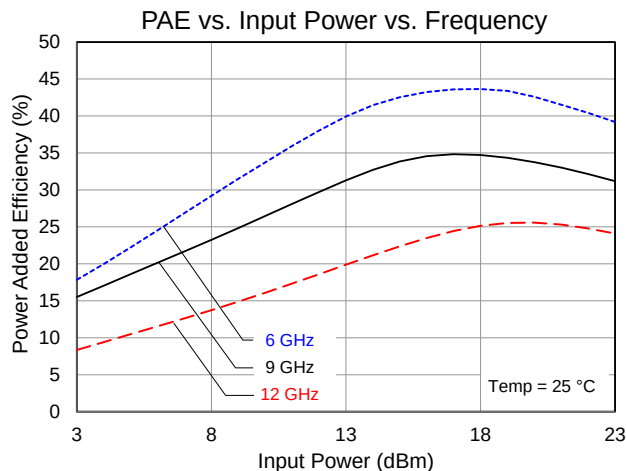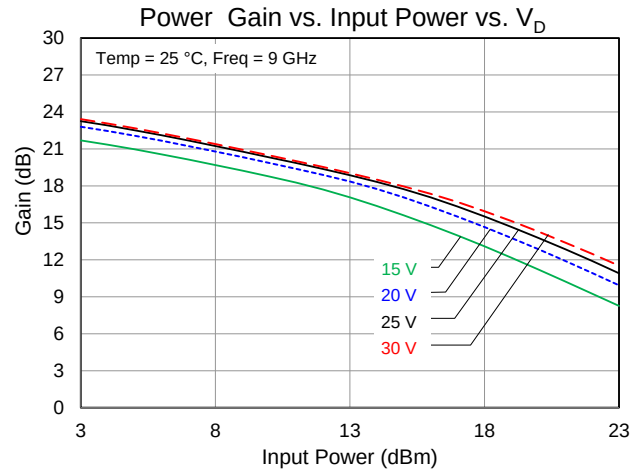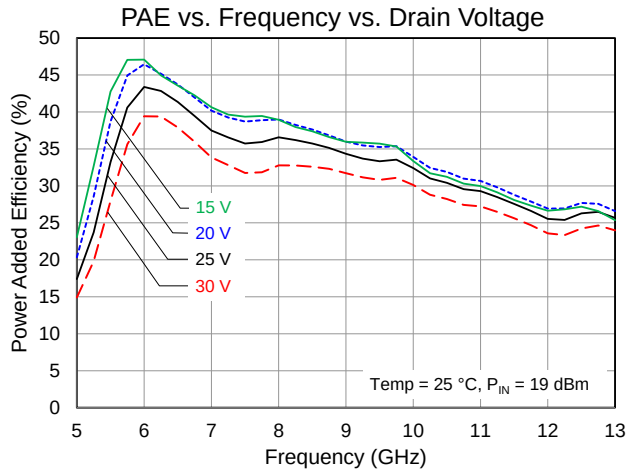





Typical Performance: Large Signal

Conditions unless otherwise specified: $V_D = 25\text{ V}$, $I_{DQ} = 100\text{ mA}$, $V_G = -2.5\text{ V}$ Typical, CW.

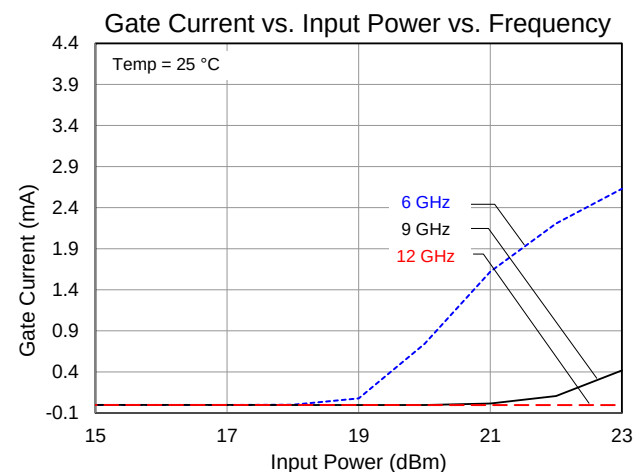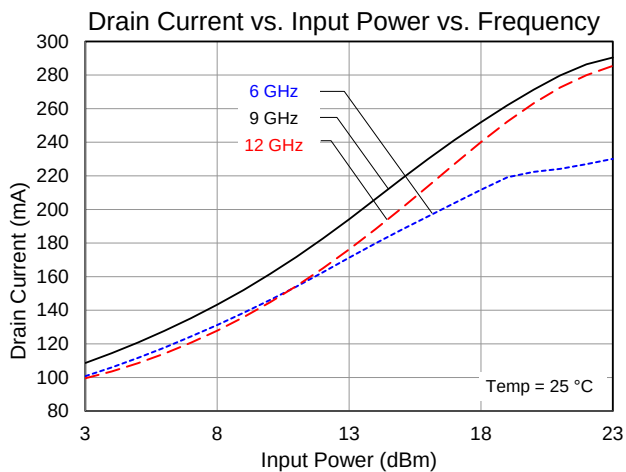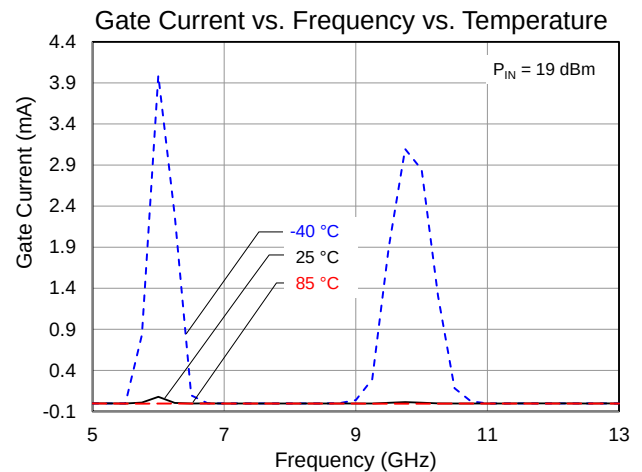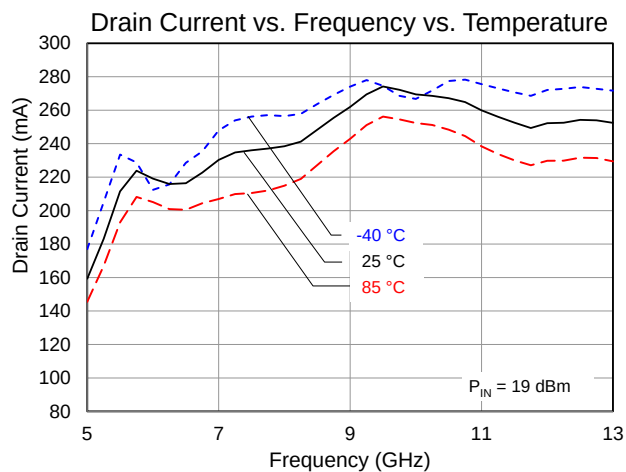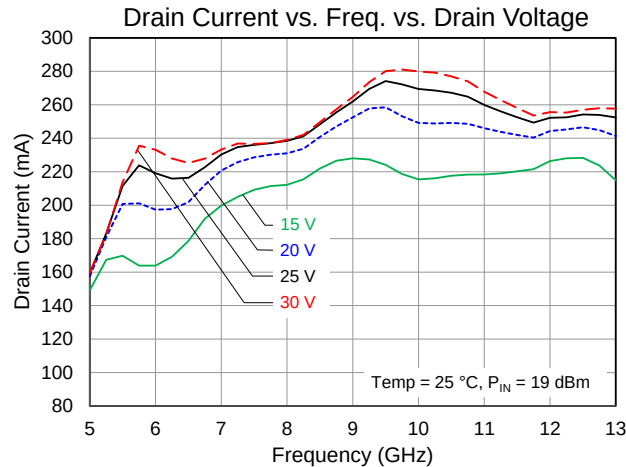







Typical Performance: Large Signal

Conditions unless otherwise specified: $V_D = 25\text{ V}$, $I_{DQ} = 100\text{ mA}$, $V_G = -2.5\text{ V}$ Typical, CW.

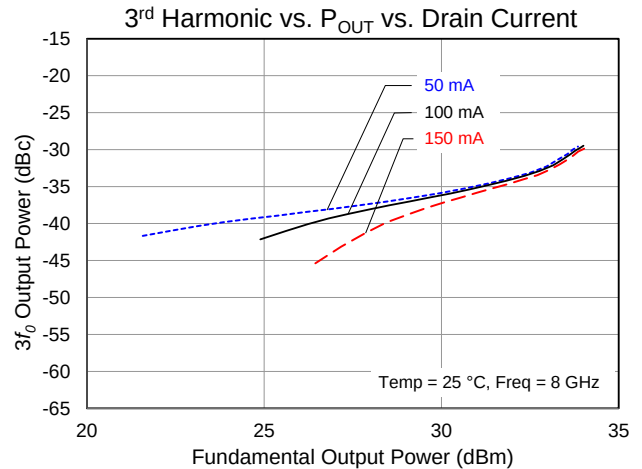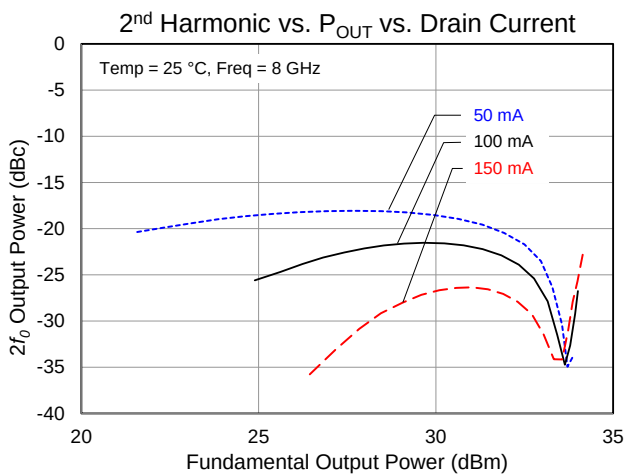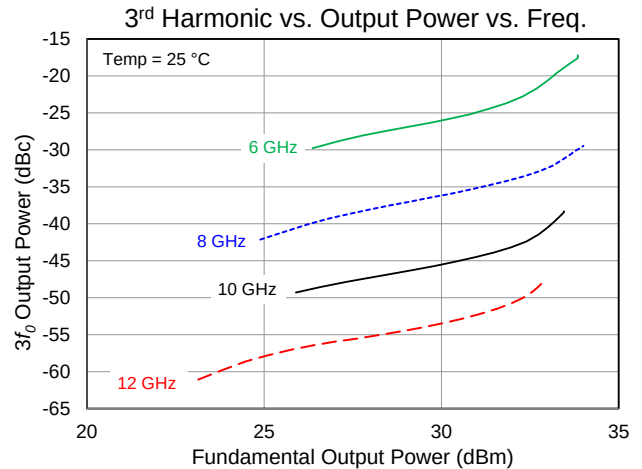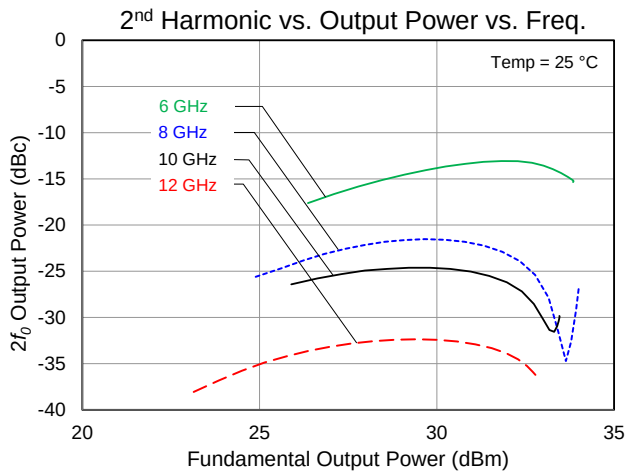


Typical Performance: Linearity

Conditions unless otherwise specified: $V_D = 25\text{ V}$, $I_{DQ} = 100\text{ mA}$, $V_G = -2.5\text{ V}$ Typical, CW.

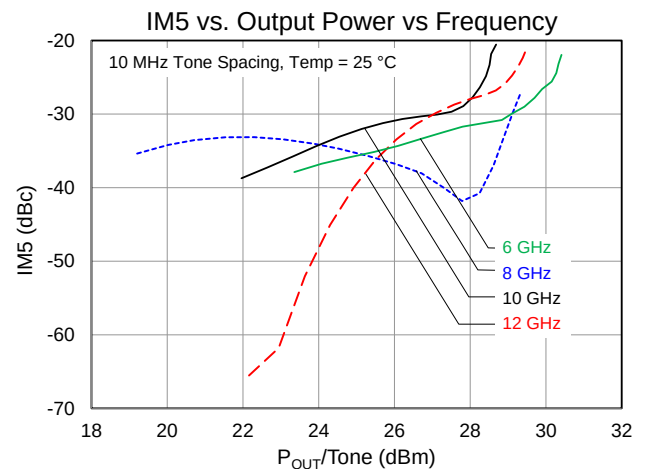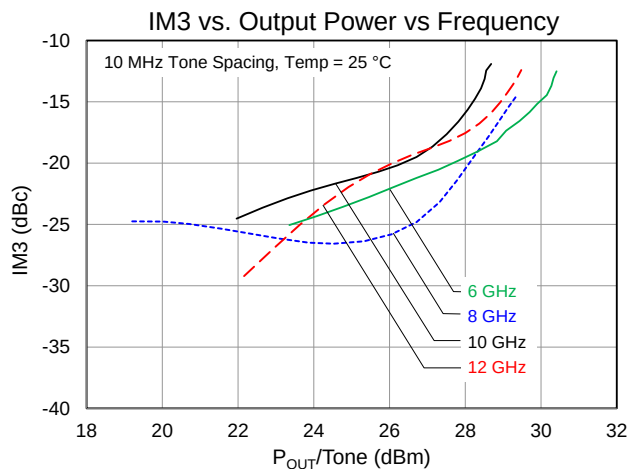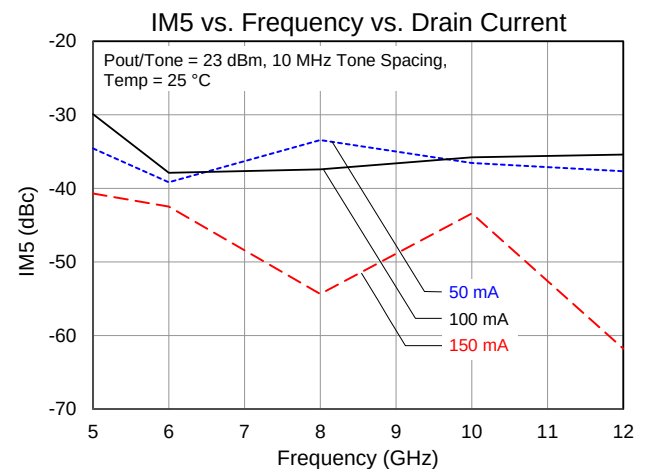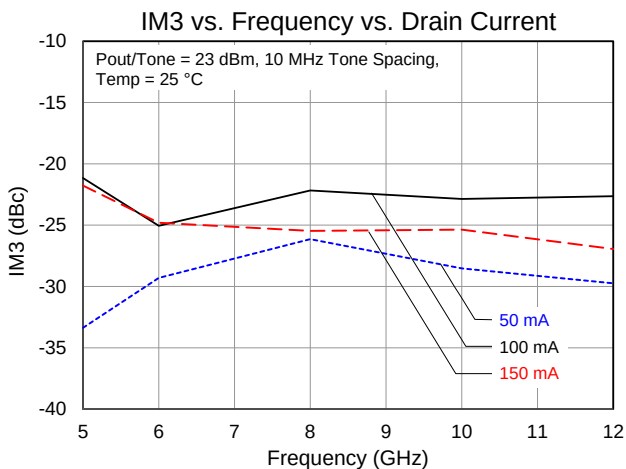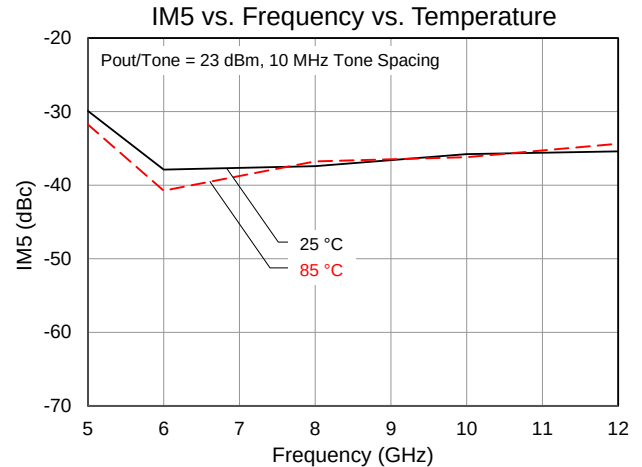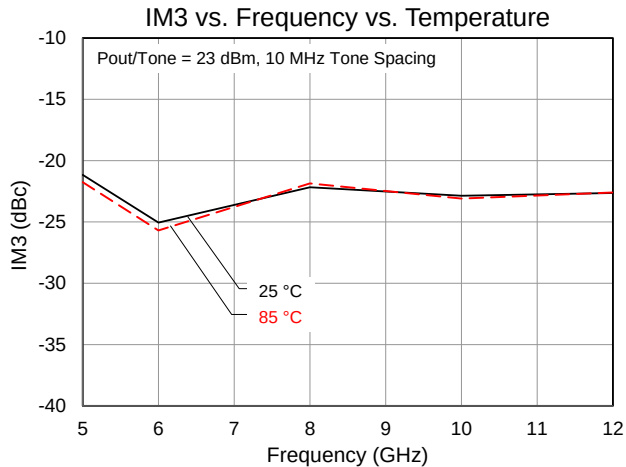

Applications Information and Pin Layout

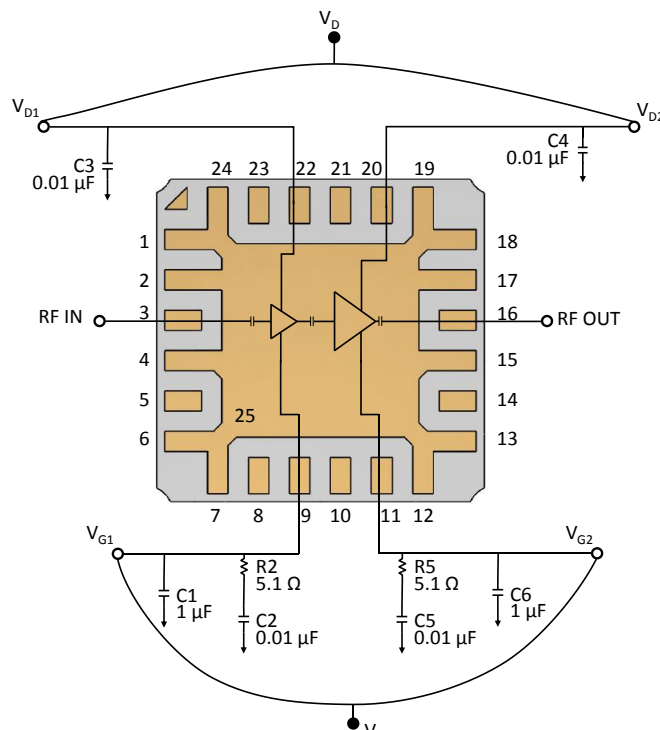

Bias-up Procedure

1. Set I_D limit to 320 mA, I_G limit to 4 mA
2. Apply -5 V to V_G
3. Apply +25 V to V_D ; ensure I_{DQ} is approx. 0 mA
4. Adjust V_G until $I_{DQ} = 100$ mA ($V_G \sim -2.5$ V Typ.).
5. Turn on RF supply


Bias-down Procedure

1. Turn off RF supply
2. Reduce V_G to -5 V; ensure I_{DQ} is approx. 0 mA
3. Set V_D to 0 V
4. Turn off V_D supply
5. Turn off V_G supply

Pin Description

Pin No.	Symbol	Description
1, 2, 4, 6, 7, 12, 13, 15, 17-19, 24, 25	GND	Must be grounded on the PCB.
3	RF _{IN}	Input; matched to 50 Ω; DC blocked
5, 8, 10, 14, 21, 23	NC	Not Connected
9	V_{G1}	Gate Voltage; Bias network required; see recommended Application Information above.
11	V_{G2}	Gate Voltage; Bias network is required; see recommended Application Information above.
16	RF _{OUT}	Output; matched to 50 Ω; DC blocked
20	V_{D2}	Drain voltage; Bias network is required; see recommended Application Information above.
22	V_{D1}	Drain voltage; Bias network is required; see recommended Application Information above.

Evaluation Board

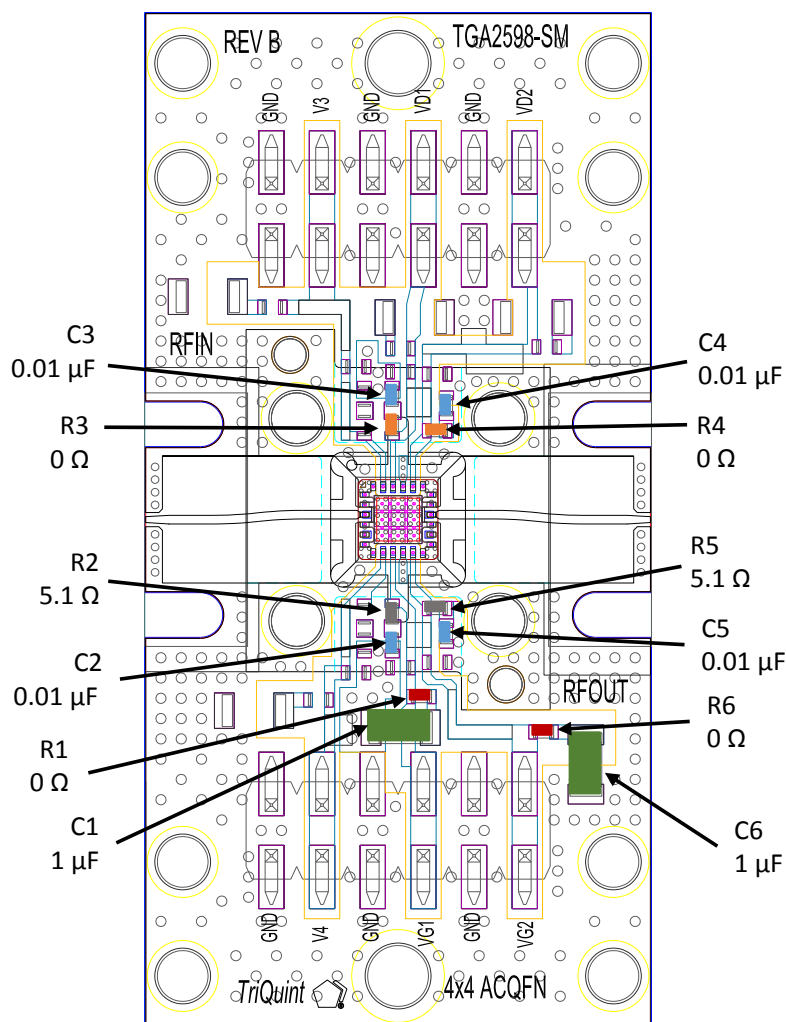


NOTE: Both V_{D1} and V_{D2} , and V_{G1} and V_{G2} must be biased.

Bill of Material

Reference Des.	Value	Description	Manuf.	Part Number
C1, C6	1 μ F	Cap, 1206, X5R	Various	
C2, C3, C4, C5	0.01 μ F	Cap, 0402, X7R	Various	
R1, R3, R4, R6	0 Ohms	Resistor, 0402	Various	
R2, R5	5.1 Ohms	Resistor, 0402	Various	

Mechanical Information

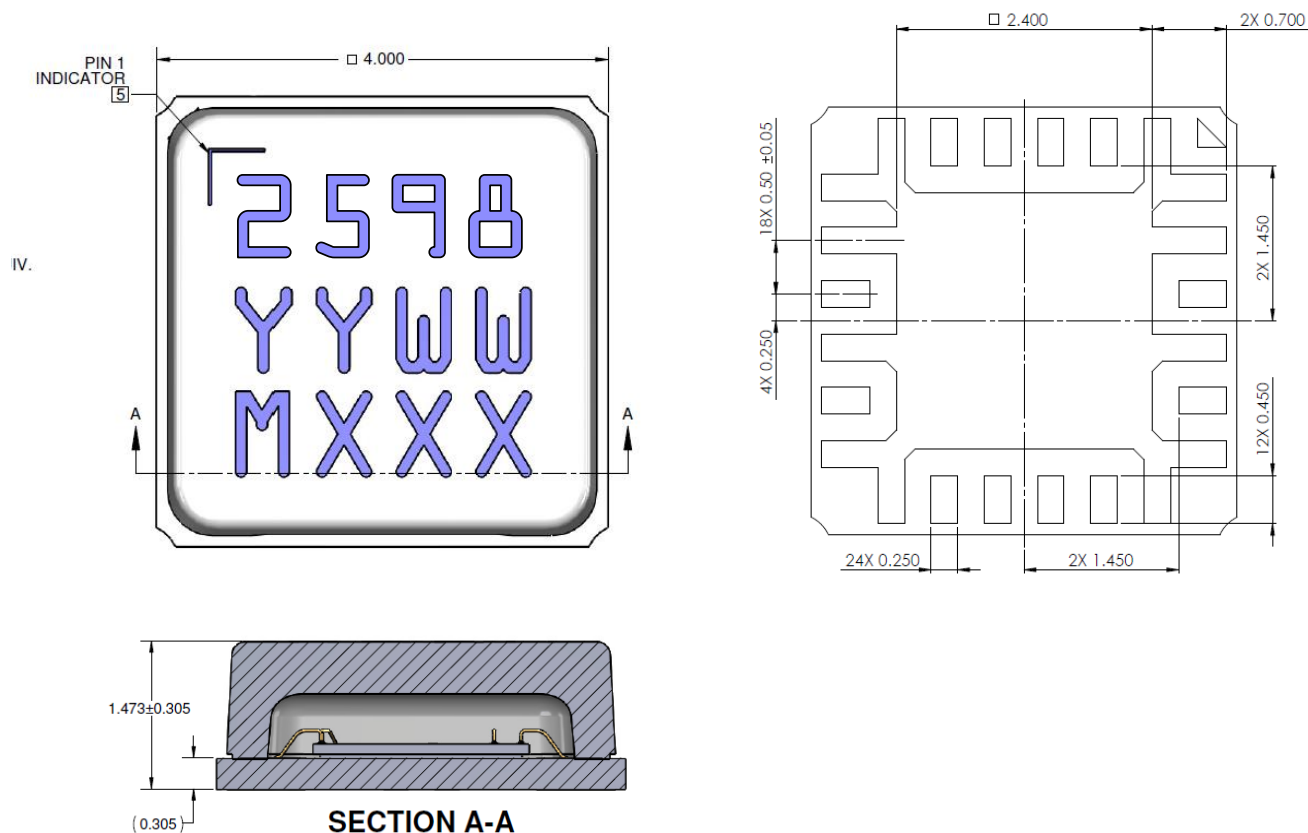

Units: millimeter

Tolerances: unless specified

x.xx = ± 0.01

x.xxx = ± 0.005

Materials:

Base: Ceramic

Lid: Plastic

All metalized features are Au plated

Part is epoxy sealed

Marking:

2598: Part number


YY: Part Assembly year

WW: Part Assembly week

ZZZ: Serial Number

MXXX: Batch ID

Recommended Soldering Temperature Profile

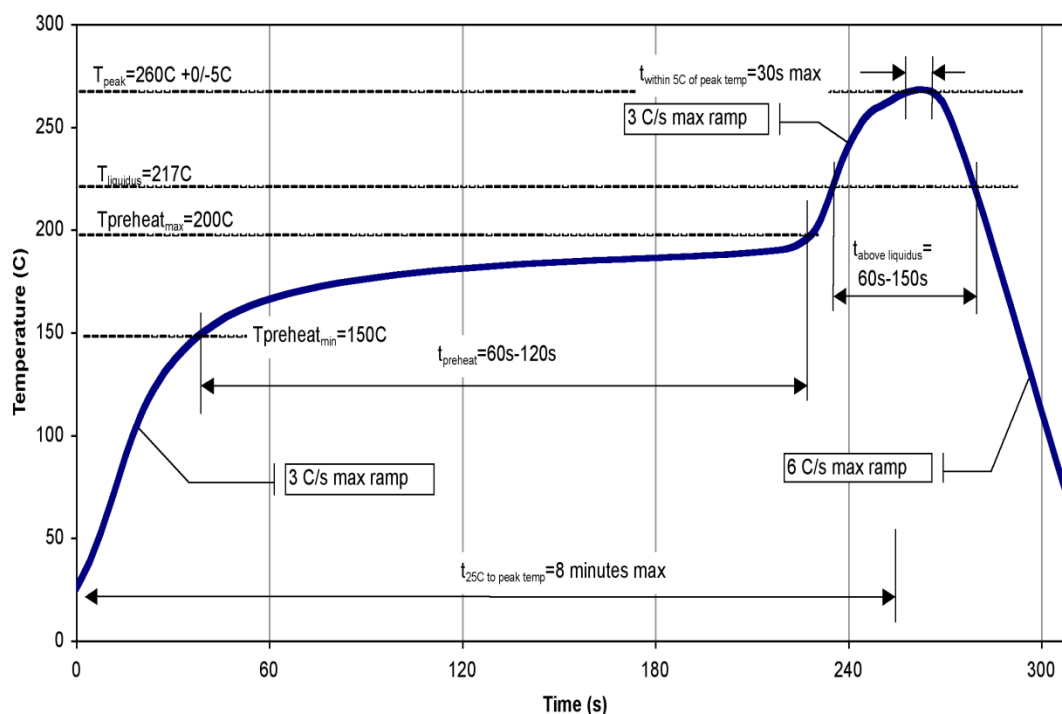

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: TBD
Value: TBD
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

MSL Rating

Level TBD at TBD°C convection reflow
The part is rated Moisture Sensitivity Level TBD at TBD°C per JEDEC standard IPC/JEDEC J-STD-020.

ECCN

US Department of Commerce: EAR99

Solderability

Compatible with the latest version of J-STD-020, Lead-free solder, 260°C

RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C15H12Br4O2) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-sales@triquint.com

Tel: +1.972.994.8465
Fax: +1.972.994.8504

For technical questions and application information: Email: info-products@triquint.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.