

MAPD-011027



3 Way 0 Degree Power Divider
5 – 1500 MHz

Rev. V1P

Features


- Surface mount
- 3 Way 0 Degree
- RoHS Compliant and is 260°C reflow compatible
- Available on tape and reel

Description

MACOM's MAPD-011027 is a 3 way 0 degree Power Divider in a low cost, surface mount package. Ideally suited for high volume CATV/Broadband applications. No external components are required with this product.



Functional Schematic

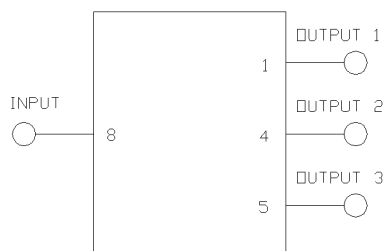

Ordering Information

Part Number	Package
MAPD-011027	500 piece reel
MAPD-011027-TB	Customer Test Board

Recommended Maximum Ratings

Parameter	Units	Min	Max
Input Power	W		0.5
DC Current	mA		500
Operating Temperature Range	°C	-40	+85

Full temperature plots available on request

* Restrictions on Hazardous Substances, European Union Directive

Pin Configuration

Function	Pin Number
1	Output 1
2,3,6,7	Ground
4	Output 2
5	Output 3
8	Input

1
ADVANCE: Data Sheets contain information regarding a product MACOM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product MACOM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

3 Way 0 Degree Power Divider 5 – 1500 MHz

Rev. V1P

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$, $P_{in} = 0\text{dBm}$

Parameter	Frequency	Units	Min	Typ	Max
Insertion Loss 1 (pin8 - pin1)	5 - 46 MHz	dB	-	0.37	0.55
	46 - 870 MHz	dB	-	1.15	1.65
	870 - 1002 MHz	dB	-	1.3	2.0
	1002 - 1218 MHz	dB	-	2.0	2.8
	1218 - 1500 MHz	dB	-	4.6	5.5
Insertion Loss 2 (pin8 - pin4)	5 - 46 MHz	dB	-	0.37	0.55
	46 - 870 MHz	dB	-	1.0	1.3
	870 - 1002 MHz	dB	-	1.2	1.5
	1002 - 1218 MHz	dB	-	1.7	2.0
	1218 - 1500 MHz	dB	-	4.5	5.0
Insertion Loss 3 (pin8 - pin5)	5 - 46 MHz	dB	-	0.37	0.55
	46 - 870 MHz	dB	-	1.3	1.8
	1002 - 1218 MHz	dB	-	1.8	2.2
	1218 - 1500 MHz	dB	-	4.8	5.2
	Input Return Loss (Pin8)	5 - 46 MHz	dB	26	31
46 - 405MHz		dB	20	26	-
405 - 1002 MHz		dB	16	20	-
1002 - 1218 MHz		dB	15	18	-
1218 - 1500 MHz		dB	5	9	-
Output Return Loss 1 (Pin1)	5 - 46 MHz	dB	11	18	-
	46 - 1218 MHz	dB	20	25	-
	1218 - 1500 MHz	dB	15	18	-
Output Return Loss (Pin4, Pin5)	5 - 46 MHz	dB	11	18	-
	46 - 740 MHz	dB	20	22	-
	740 - 1218 MHz	dB	17	20	-
	1218 - 1500 MHz	dB	15	19	-
Isolation (Pin1 - Pin 5)	5 - 46 MHz	dB	18	28	-
	46 - 1002 MHz	dB	20	25	-
	1002 - 1218 MHz	dB	18	24	-
	1218 - 1500 MHz	dB	14	15	-
Isolation (Pin1 –Pin 4) (Pin4 –Pin 5)	5 - 46 MHz	dB	18	28	-
	46 - 1002 MHz	dB	20	25	-
	1002 - 1218 MHz	dB	18	24	-
	1218 - 1500 MHz	dB	12	14	-
Amplitude Balance, Output 1 to Output 2 (Pin1, 4)	5 - 46 MHz	dB	-	0.01	0.1
	46 - 1218 MHz	dB	-	0.3	0.5
	1218 - 1500 MHz	dB	-	0.5	0.9
Amplitude Balance, Output 1 to Output 3 (pin 1, 5) & Output 2 to Output 3 (pin 4, 5)	5 - 46 MHz	dB	-	-0.01	0.2
	46 - 1218 MHz	dB	-	-0.3	0.5
	1218 - 1500 MHz	dB	-	-0.5	0.9
Phase Balance between all Outputs	5 - 50 MHz	°	-	±0.4	±1.0
	50 - 1218 MHz	°	-	±6.0	±8.0
	1218 - 1500 MHz	°	-	±8.0	±12.0

2

ADVANCE: Data Sheets contain information regarding a product MACOM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.


PRELIMINARY: Data Sheets contain information regarding a product MACOM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
• India Tel: +91.80.43537383 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.


MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Outline Drawing

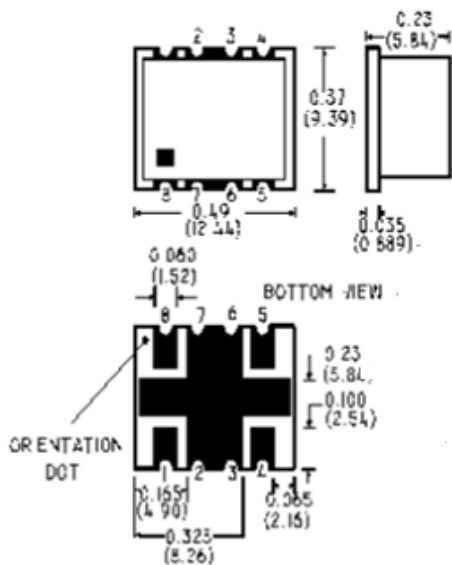

1. Dimensions in mm.
2. Tolerance: ± 0.2 mm unless otherwise noted.
3. Model number and lot code are printed on the reel.
4. Lead plating: ENIG.

PCB Layout











Tape & Reel Information

Item	Dimension
Ao	10.26mm +/-0.1mm
Bo	13.46mm +/-0.1mm
Ko	6.10mm +/-0.1mm
W	24.00mm +/-0.3mm
P1	16.00mm +/-0.1mm

3 Way 0 Degree Power Divider 5 – 1500 MHz

Rev. V1P

Typical Performance Curves

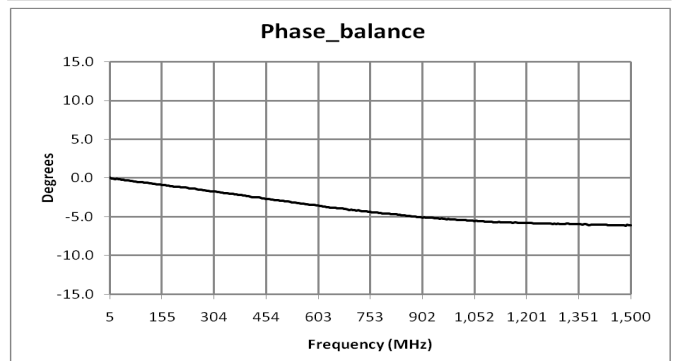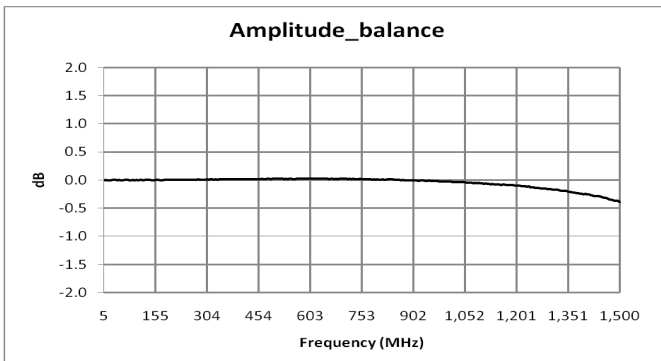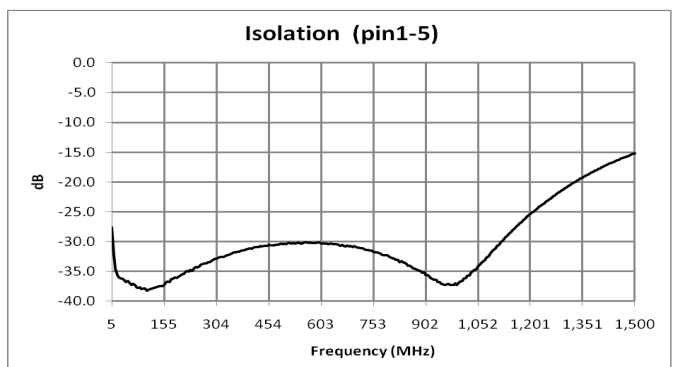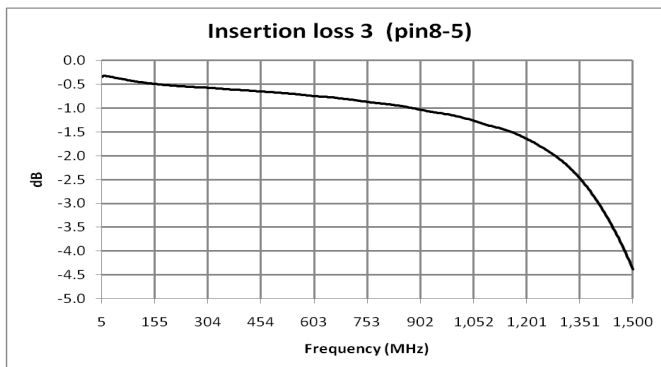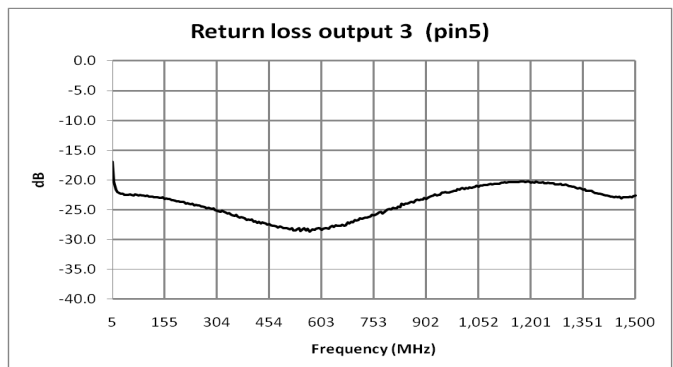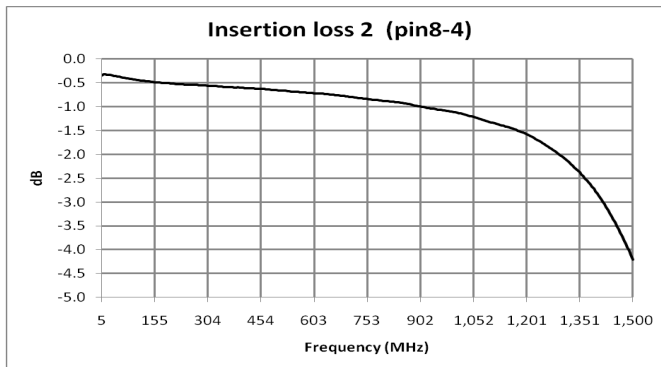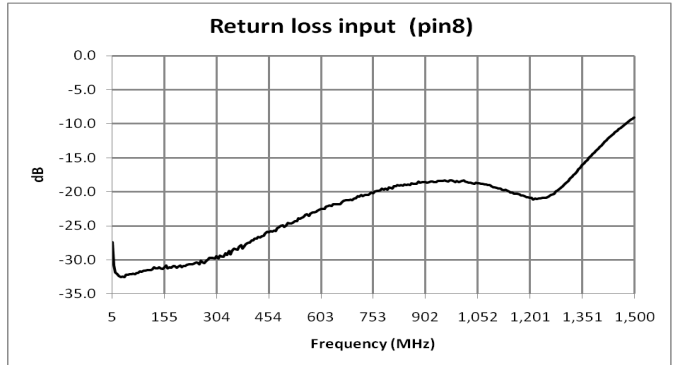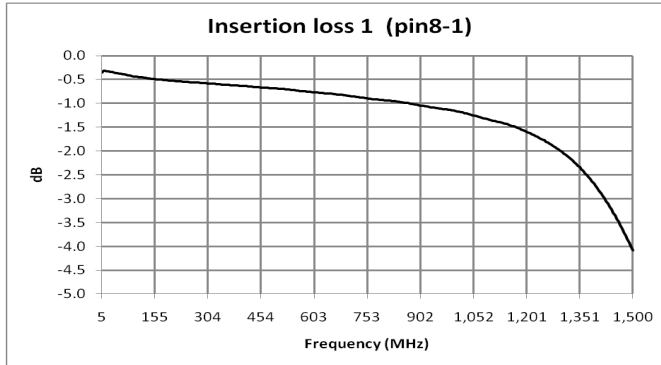

4 **ADVANCE:** Data Sheets contain information regarding a product MACOM is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product MACOM has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
 • India Tel: +91.80.43537383 • China Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

MA-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.