


### Surface Mount Termination 10 Watts, 50Ω

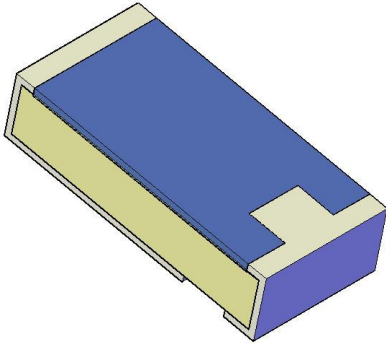

#### Description

The 100200-4Z50-2 is high performance Alumina surface mount termination intended as a lower cost alternative to Aluminum Nitride (AlN) and Beryllium Oxide (BeO). The termination is well suited to all cellular frequency bands such as; AMPS, GSM, DCS, PCS, PHS and UMTS. The high power handling makes the part ideal for terminating 90 degree hybrid, directional couplers, and for use in isolators.

#### General Specifications

<b>Resistive Element</b>	Thick film
<b>Substrate</b>	BeO Ceramic
<b>Terminal Finish</b>	Thick film Silver
<b>Operating Temperature</b>	-55 to +125°C (see chart)

Tolerance is  $\pm 0.010"$ , unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. All dimensions in inches.

#### Electrical Specifications


<b>Resistance Value:</b>	50 ohms, $\pm 2\%$
<b>Power:</b>	10 Watts
<b>Frequency Range:</b>	DC – 3.0 GHz
<b>V.S.W.R.:</b>	1.25:1

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change without notice**

#### Features:

- 10 Watts
- Lowest Cost
- True Surface Mount
- BeO Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested

#### Outline Drawing

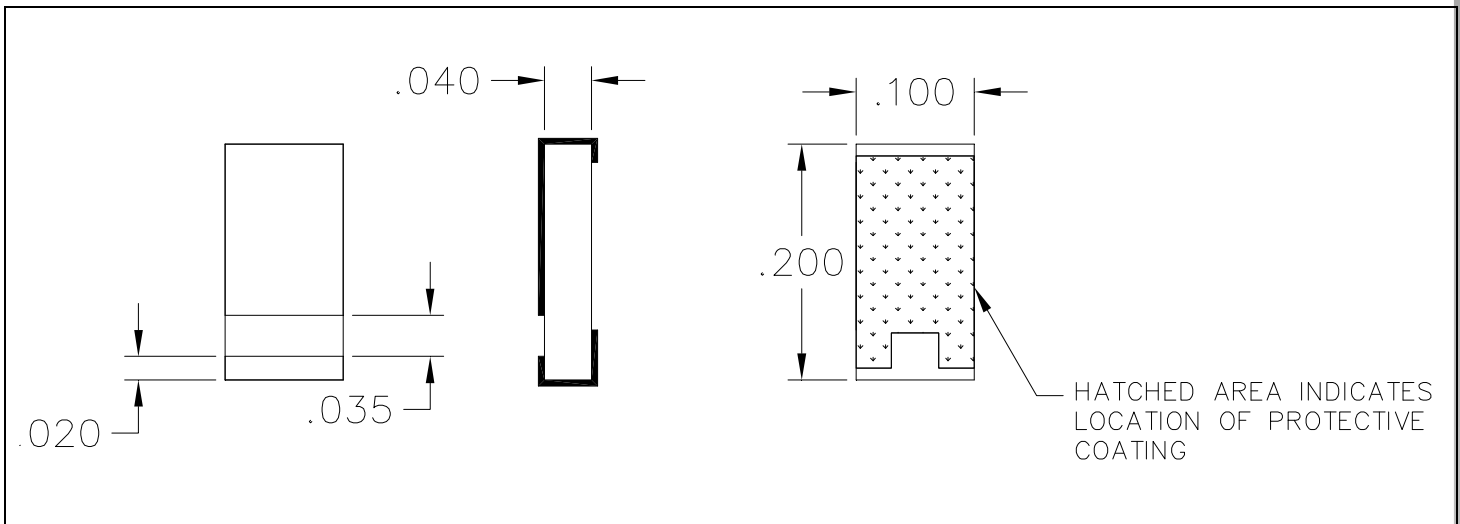

100200-4Z50-2 (097) Rev B pg. 1 of 2

