





| PERFORMANCE SPECIFICATION                        | MIN  | TYP  | MAX  | UNITS              |
|--------------------------------------------------|------|------|------|--------------------|
| Lower Frequency:                                 |      |      | 1800 | MHz                |
| Upper Frequency:                                 | 2200 |      |      | MHz                |
| Tuning Voltage:                                  | 0.5  |      | 18   | VDC                |
| Supply Voltage:                                  | 9.5  | 10   | 10.5 | VDC                |
| Output Power:                                    | -6.0 | -3.0 | 0    | dBm                |
| Supply Current:                                  |      | 15   | 25   | mA                 |
| Harmonic Suppression (2 <sup>nd</sup> Harmonic): |      | -15  | -10  | dBc                |
| Pushing:                                         |      | 1.0  | 3.0  | MHz/V              |
| Pulling, all Phases:                             |      | 4.0  | 6.0  | MHz pk-pk          |
| Tuning Sensitivity:                              |      | 57   |      | MHz/V              |
| Phase Noise @ 10kHz offset:                      |      | -100 | -95  | dBc/Hz             |
| Phase Noise @ 100kHz offset:                     |      | -116 |      | dBc/Hz             |
| Load Impedance:                                  |      | 50   |      | $\Omega$           |
| Input Capacitance:                               |      |      | 50   | pF                 |
| Operating Temperature Range:                     | -40  |      | +85  | $^{\circ}\text{C}$ |
| Storage Temperature Range:                       | -45  |      | +90  | $^{\circ}\text{C}$ |

Phase Noise (1 Hz BW, Typical)

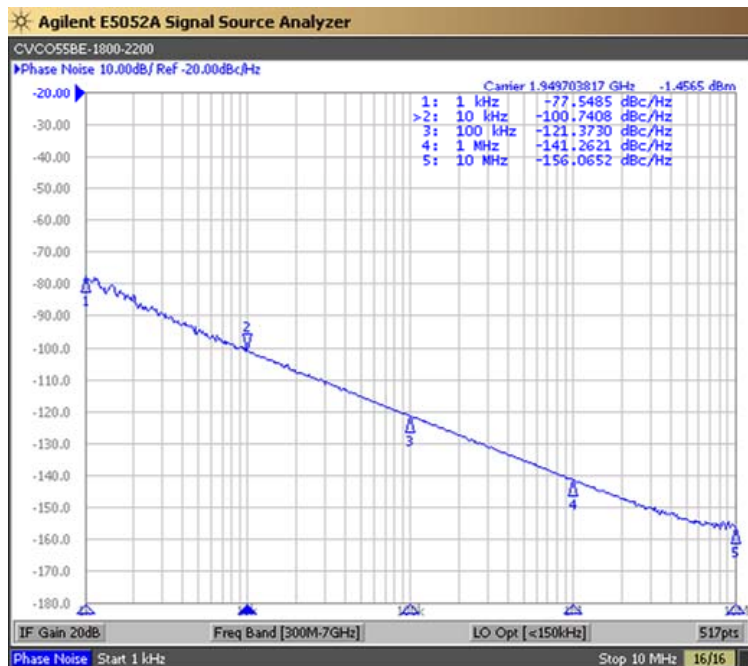


Tuning Curve (Typical)

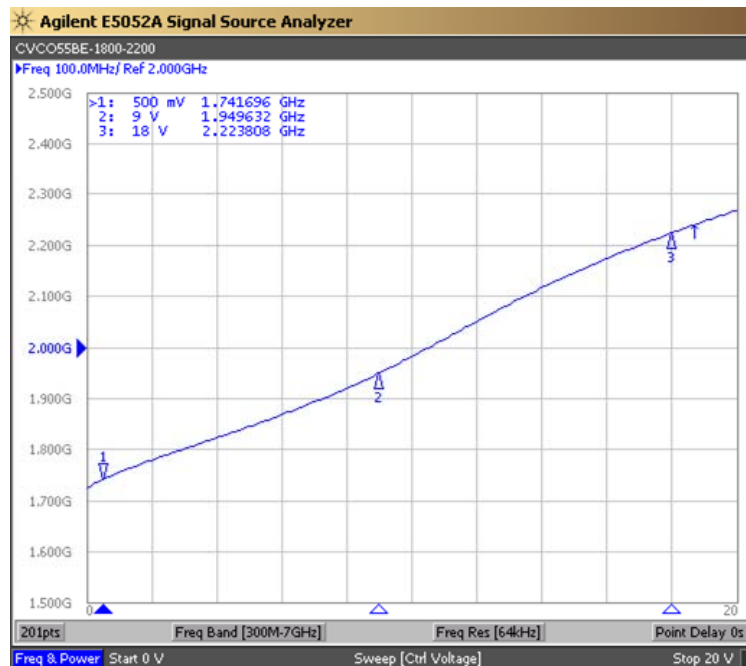

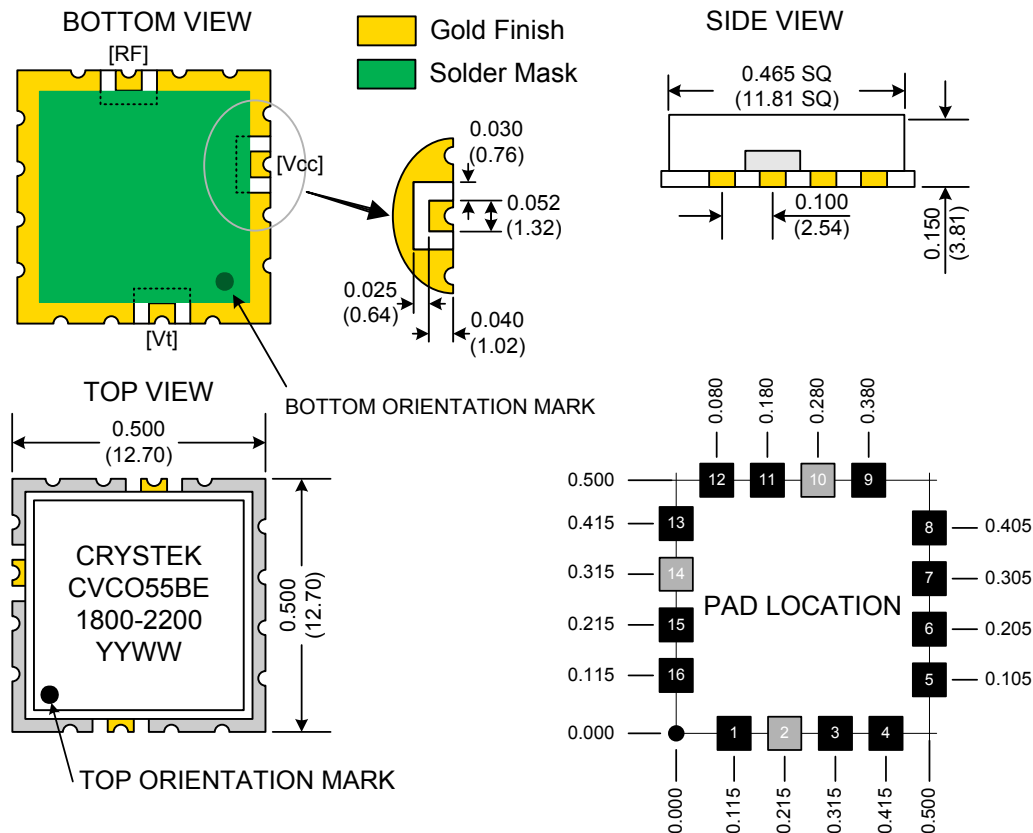

### TAPE AND REEL

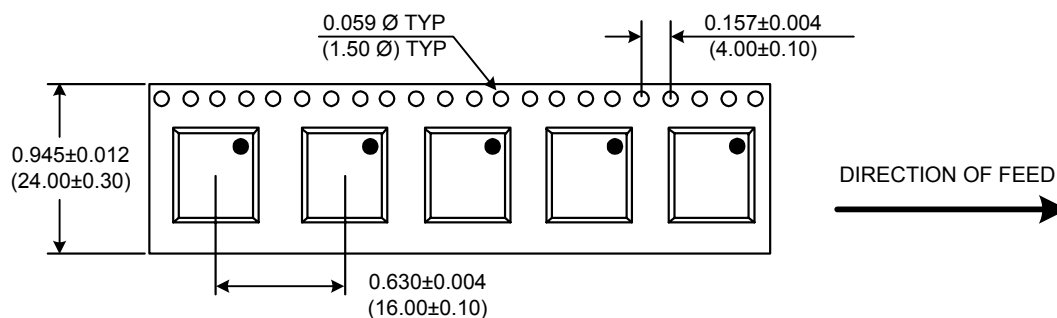

#### Product Control:

|                      |                    |               |             |
|----------------------|--------------------|---------------|-------------|
| Crystek Part Number: | CVCO55BE-1800-2200 | Release Date: | 27-March-08 |
| Revision Level:      | C                  | Responsible:  | C. Vales    |

Specification is subject to change without notice

