

Commercial CCR-39 Multi-Throw DC-18GHz Latching

The CCR-39 Switch is a broadband, multi-throw, electromechanical coaxial switch designed to switch a microwave signal from a common input to any of 3, 4, 5, or 6 outputs. The characteristic impedance is 50 Ohms. The switches are small using the popular connector spacing on a 1.062" dia. circle. Each position has an individual actuator mechanism allowing random position selection. This also minimizes switching time.


Specifications

RF Contacts:	Break before make					
Actuator	Voltage (VDC) 20°C		12	15	28	
	Latching Current (mA)		255	205	90	
		Positions				
	Reset Current (mA)	3	765	615	270	
		4	1020	820	360	
		5	1275	1025	450	
		6	1530	1230	540	
Switching Time:	20 msec max					
Connectors:	SMA (f)					
Weight:	6 oz. max					
Temperature Range:	-40°C to +65°C (Operating)					


The CCR-39 comes with a latching actuator. The latching switch remains in the last position selected when the switch is de-energized. STD dual command requires a reset pulse before a new selected position. A separate reset circuit allows all positions to be set to an open position. User must provide both reset (clear) and set (select new position) commands.

Shock:	MIL-STD-202 Method 213, Condition D (500G
	Non Operating)
Vibration:	MIL-STD-202 Method 214, Condition D (10G RMS Non Operating)
Humidity:	Moisture Seal Available
MTBF:	6.5 Million Hours (MIL-HDBK-217F Fixed, 25° C, <1 Cycle per hour)

RF Power Handling




Specifications	DC-6 GHz	6-12 GHz	12-18 GHz
VSWR (max)	1.25:1	1.40:1	1.50:1
Insertion Loss (min)	0.20 dB	0.40 dB	0.50 dB
Isolation (max)	70.0 dB	60.0 dB	60.0 dB

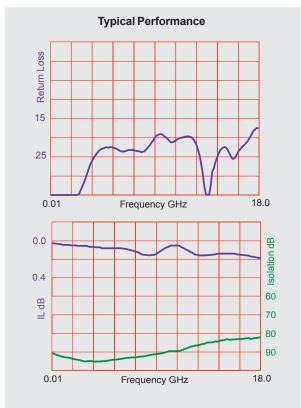



Specifications subject to change without notice.

www.teledynecoax.com email: coax@teledyne.com

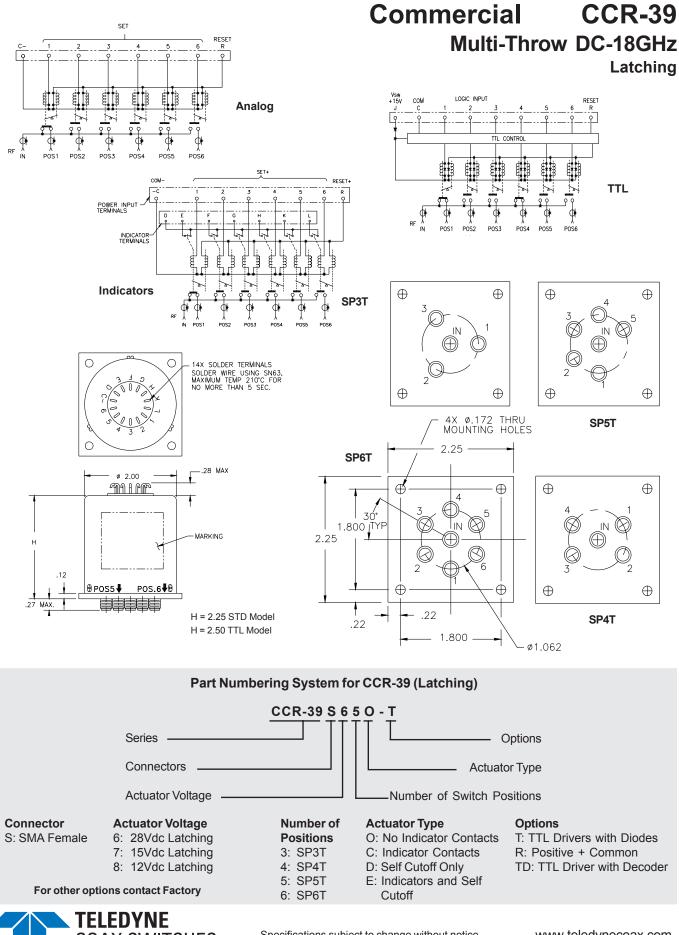

COAX SWITCHES

Specifications subject to change without notice.

www.teledynecoax.com email: coax@teledyne.com