




NOTES: HARDWARE IS INCLUDED.

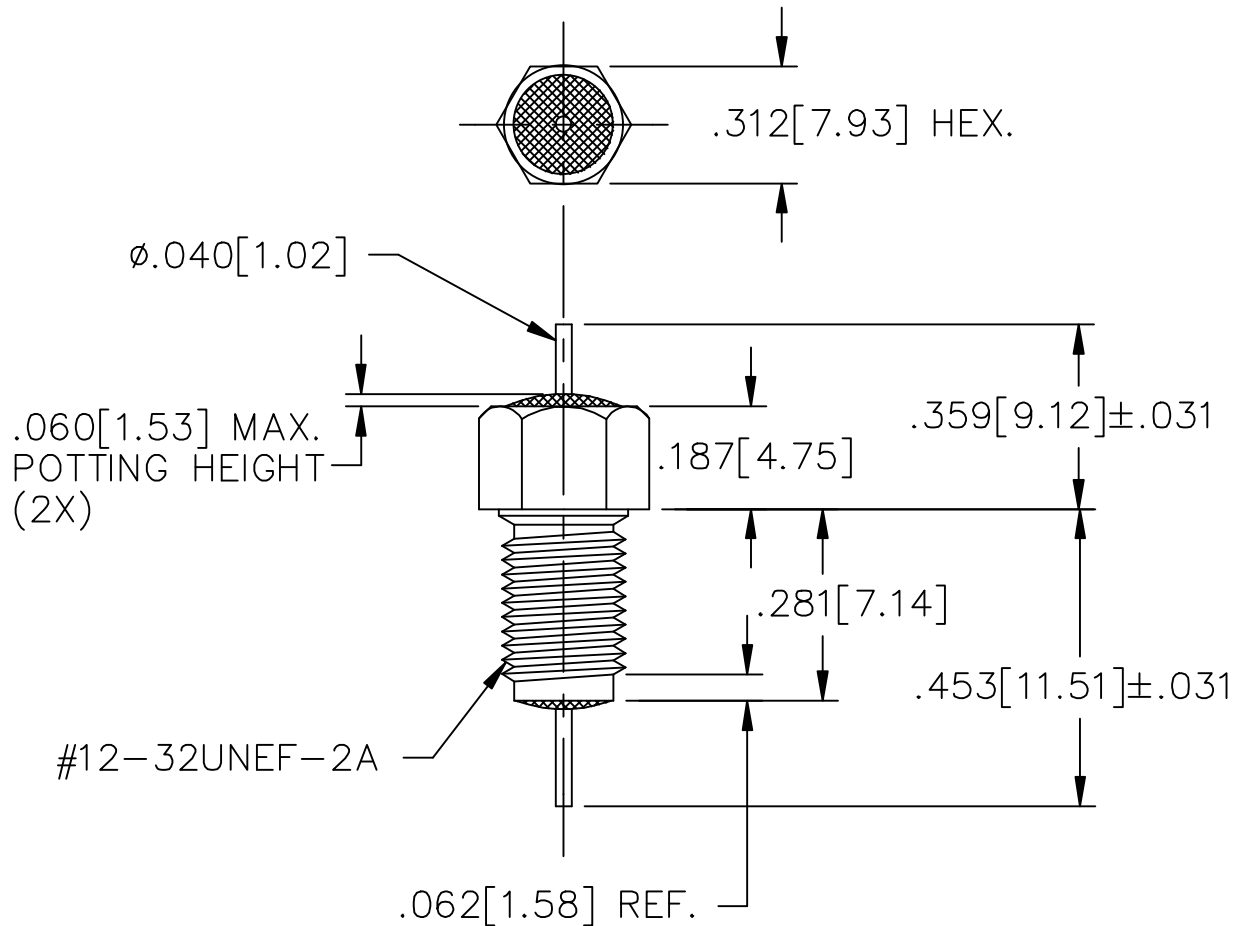

TERMINAL FINISH: SOLDER


BUSHING FINISH: SILVER

CAPACITANCE	.30uF GMV
TEMP. RANGE	-55°C TO +125°C
CURRENT	15 AMPS
WORKING VOLTAGE	85°C 125 VDC 125°C 100 VDC
DC RESISTANCE	.01 OHMS MAX.

IL=PER MIL-STD-220, @25°C N/L

FREQ. MHz	I.L. (db)
.05	5
.1	10
.3	20
1	28
10	45
100	55
1 GHz	60

SCHEMATIC



MARKING:

PART: SCI 9910-381-6002

BAG:

SCI 9910-381-6002

DATE CODE

LOT NO.

QTY./BAG (50 MAX.)

			5	4	3	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 SPECTRUM CONTROL INC.	ERIE, FAIRVIEW PENNSYLVANIA	
			CN 203282	CN 201314	CN 184925	CHANGE NOTICE	Fractions ± 1/64		Dwn. KAUFFMAN	Description
							Dec. .xx±		Ckd. 8/29/01	F/T FILTER
							Dec. .xxx± .010		Apvd.	
							Angles ±0° 30'		Scale NONE	
							CODE IDENT. NO. DLSP2			9910-381-6002