


ALL DESIGN, OPERATIVE AND PROCESS DATA PERTAINING TO THE ARTICLE SHOWN ON THIS SHEET IS THE PROPERTY OF POLYPHASER CORPORATION. THE INFORMATION IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR APPROPRIATED BY OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF POLYPHASER CORPORATION.

REVISIONS

REV	LTR	DATE	ENG	MKTG	Q.A.
-----	-----	------	-----	------	------

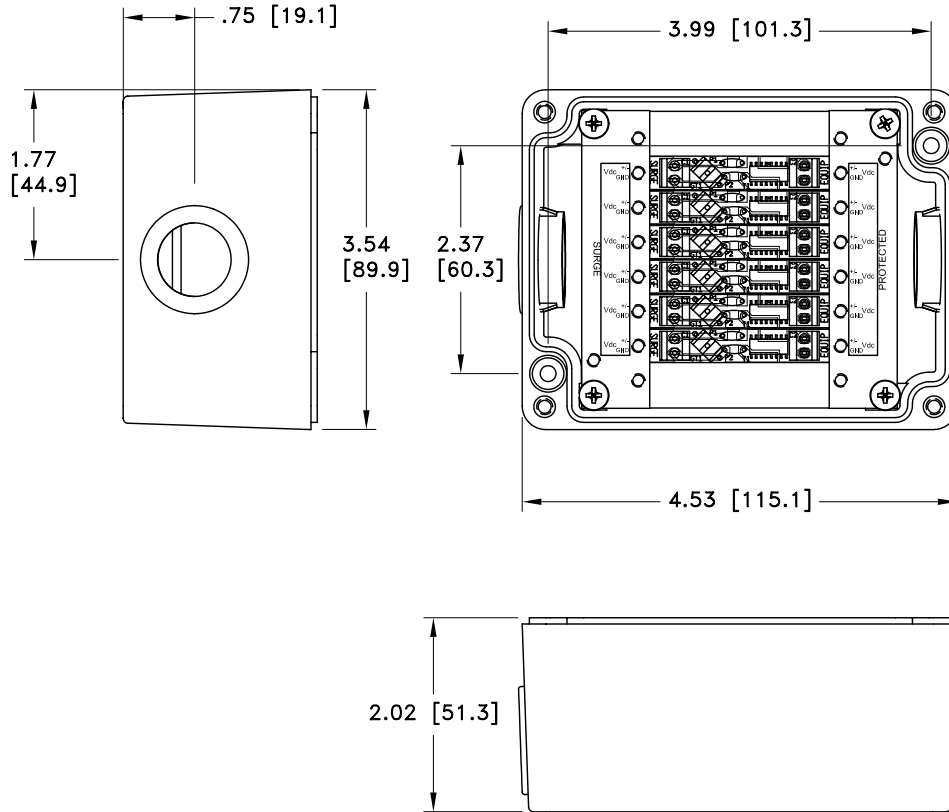

MAXIMUM CHARACTERISTICS (IX-H)

TURN-ON(@10mA):
 $\pm 9V_{dc} \pm 10\%$
 UL 497B STRIKE VOLTAGE BREAKDOWN
 (100 Vdc /SEC RISE):
 $+8.4V_{dc}$ TO $+9.6V_{dc}$
 RESISTANCE:
 $1\Omega \pm 20\%$
 DATA RATE:
 UP TO 100Mbps
 MAX HOLDING CURRENT:
 $400mA @ +20^{\circ}C$
 $620mA @ -40^{\circ}C$
 $290mA @ +50^{\circ}C$
 $235mA @ +65^{\circ}C$

GENERAL CHARACTERISTICS


SURGE:
 BELLCORE 1089 10/1000 μs 100A
 APPLICATION:
 INDOOR PANEL MOUNT
 TEMPERATURE:
 $-40^{\circ}C$ TO $+65^{\circ}C$ STORAGE/OPERATING
 WIRE RANGE:
 16 TO 28 AWG

CUSTOMER APPROVAL: _____ DATE: _____

ALL DIMENSIONS SHOWN ABOVE ARE FOR REFERENCE ONLY.

NOTES:

1. TORQUE 4X M4-20MM LID SCREWS TO 11 lbf-in MINIMUM.

DRAFTER R. SWART	DATE 05/12/06	 P.O. BOX 9000 MINDEN, NV 89423 TEL: 775-782-2511 FAX: 775-782-4476 DWG NO/PART NO/DESCRIPTION IX-6H CUSTOMER PRINT			
MECH ENGINEER R. DUNNING	DATE 05/16/06				
ELEC ENGINEER L. CHANG	DATE 05/15/06				
MARKETING S. DOTTER	DATE 05/16/06				
QUALITY DEPT L. JACQUES	DATE 05/16/06	CAGE CODE 61114	FILE NAME -C1	SCALE 1/2	SHEET 1 OF 1