

Adapters, Between-Series

Quick Connect 7/16 to Type N, DC - 7.5 GHz

SPECIFICATIONS:

Models: 5706Q; 5707Q

RoHS
Compliant

Electrical:

Frequency Range _____ DC - 7.5 GHz
VSWR:
DC To 2GHz _____ 1.20:1 Maximum
2 To 7.5GHz _____ 1.35:1 Maximum
Impedance _____ 50 Ohms
Operating Temp Range _____ -65°C to +85°C

Mechanical:

Connectors _____ White Bronze Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper
Coupling Nuts _____ White Bronze Plated Brass


AEROFLEX
A passion for performance.

Model Number: **5706Q**

DIN-7/16 Male To Type N Female

QUICK CONNECT
COUPLING NUT

9/16 [14.29] WRENCH FLATS

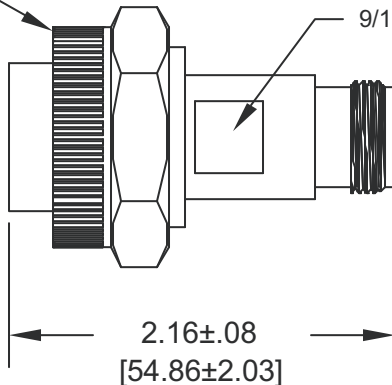


Model Number: **5707Q**

DIN-7/16 Male To Type N Male

QUICK CONNECT
COUPLING NUT

9/16 [14.29] WRENCH FLATS

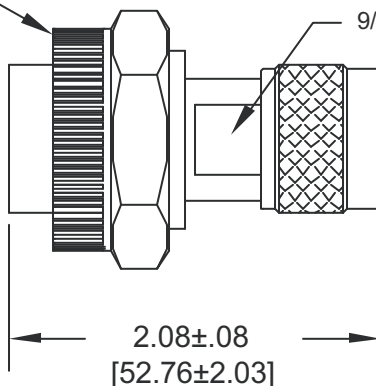


Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design, specifications are subject to change without notice. Contact factory for technical specifications before purchasing or use.

5706Q: REV -

AEROFLEX
INMET

Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@eroflex.com

5706Q Adapter

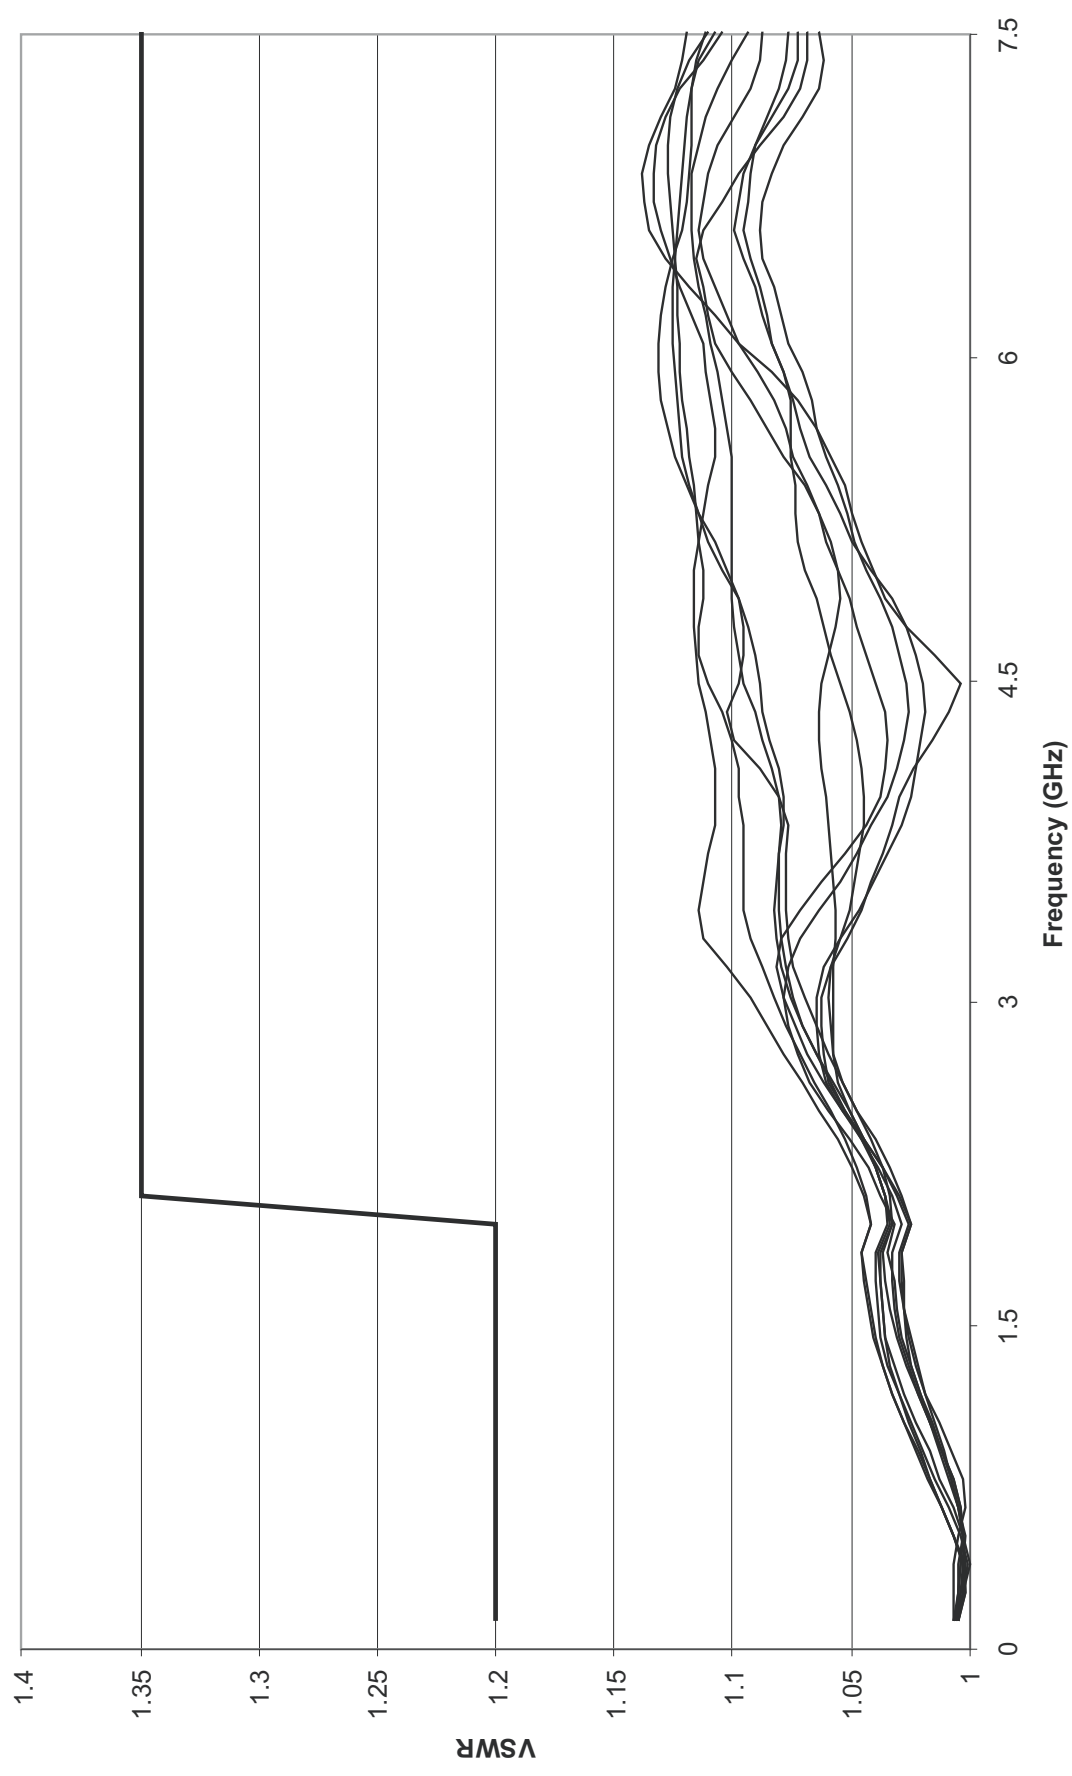

5057Q Adapter

