This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	7/16/07	WWW



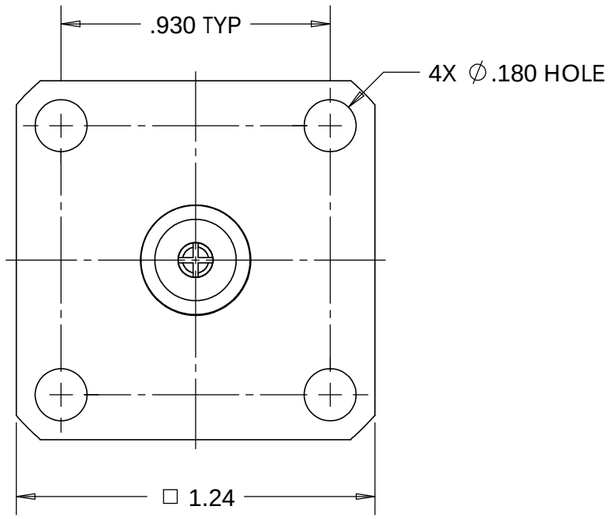

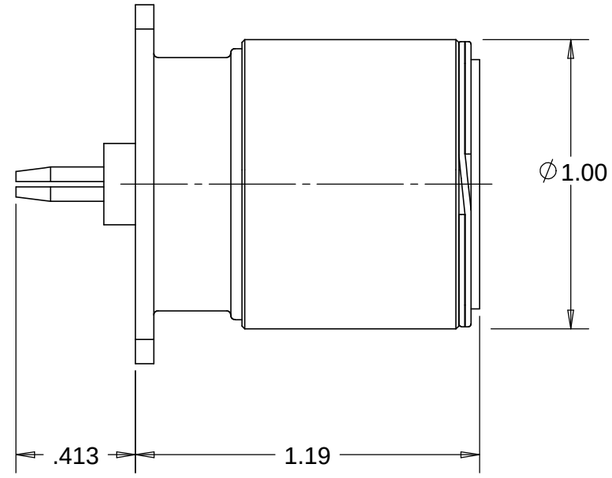

ENGINEERING DATA:

ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL

MECHANICAL:
INTERFACE: QDS(m) PER TRU SPEC
QC(m) PER TRU SPEC
MATERIAL:
GASKET: SILICONE RUBBER
INSULATOR: TEFLON PER ASTM-D1710, I1A
CONTACT: BERYLLIUM COPPER C17300, TD04 (H) PER ASTM-B196
OTHER METAL PARTS: BRASS C36000, H02 PER ASTM-B16

FINISH:
CONTACTS: SILVER PLATED
OTHER METAL PARTS: NICKEL PLATED

NOTES:
1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE REFERENCE ONLY.

2. PRODUCT COMPLIES WITH ROHS DIRECTIVE 2002/95/EC.

MATERIAL	DO NOT SCALE DRAWING	DRAWN: Warren Whitten	DATE: 5/14/07
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR.: AM	DATE: 7/16/07
	TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2` MACHINED SURFACES: 63	MFG APPR.	DATE
COMMENTS:		OTHER APPR.	DATE
surface area: sq inch / weight: lbs		THIRD ANGLE PROJECTION	

TRU CORPORATION
245 LYNNFIELD STREET, PEABODY, MA 01960
The Custom Interconnect Leader™

TITLE:
CONNECTOR, COAXIAL, RF
QDS(m) to QC(m) ADAPTER

SIZE	DWG. NO.	REV
B	TRU-15001	-
CAGE CODE: 92180	SCALE: 2:1	SHEET 1 OF 1