

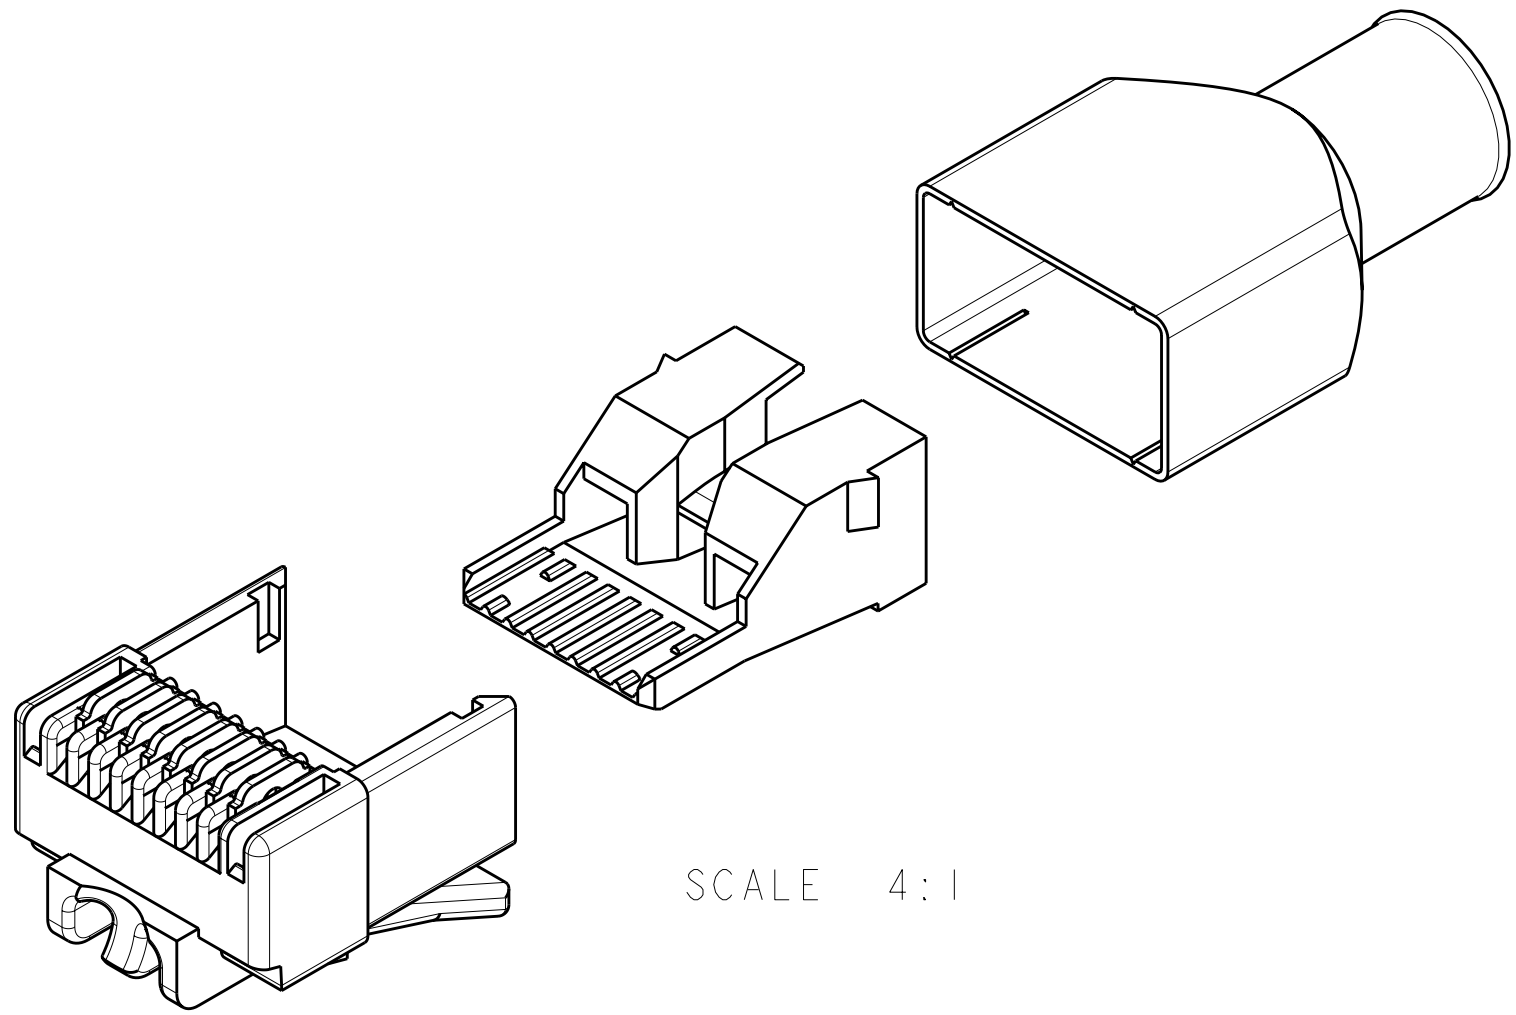
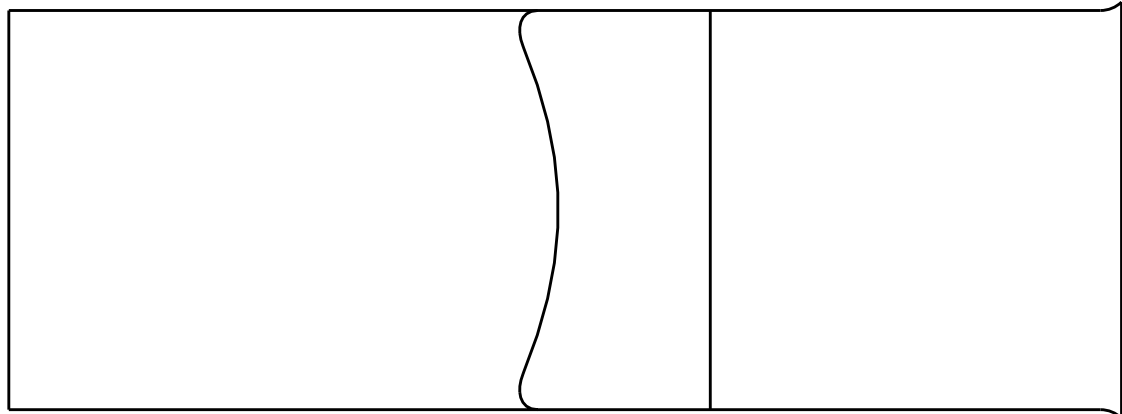
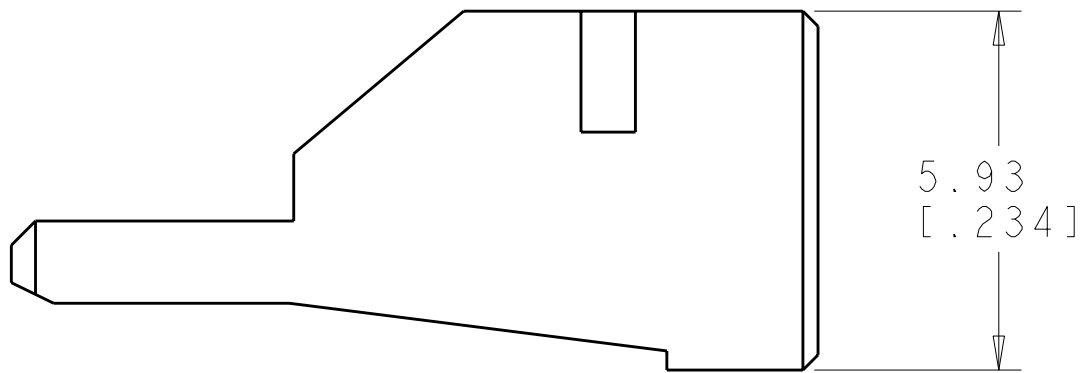
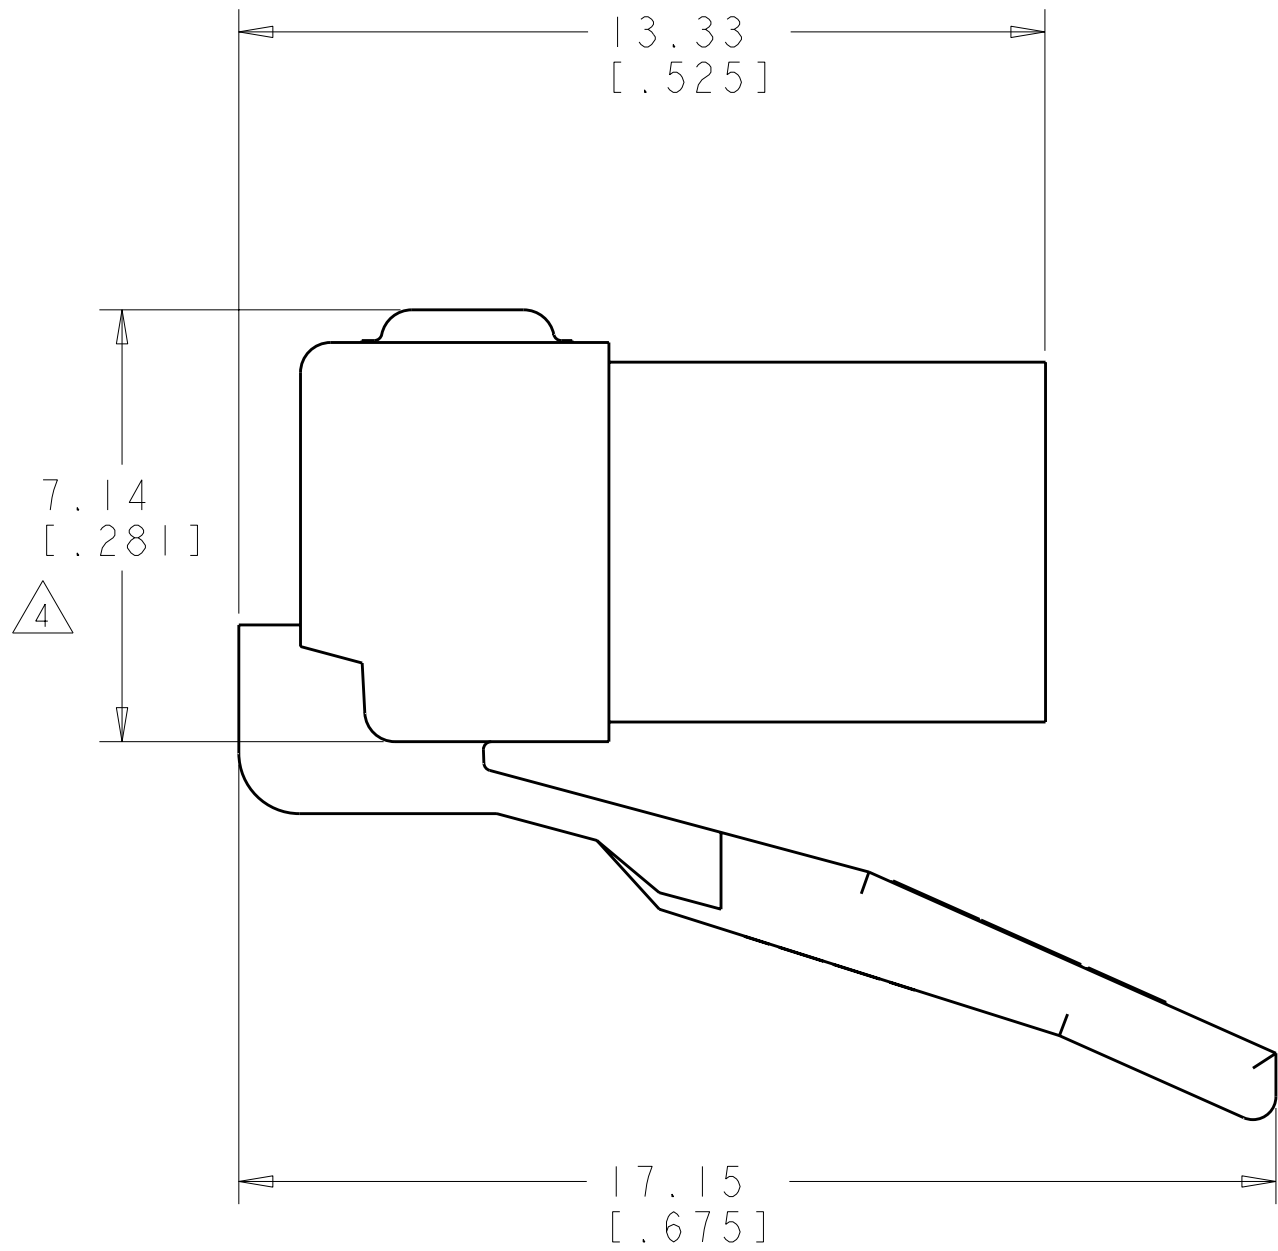
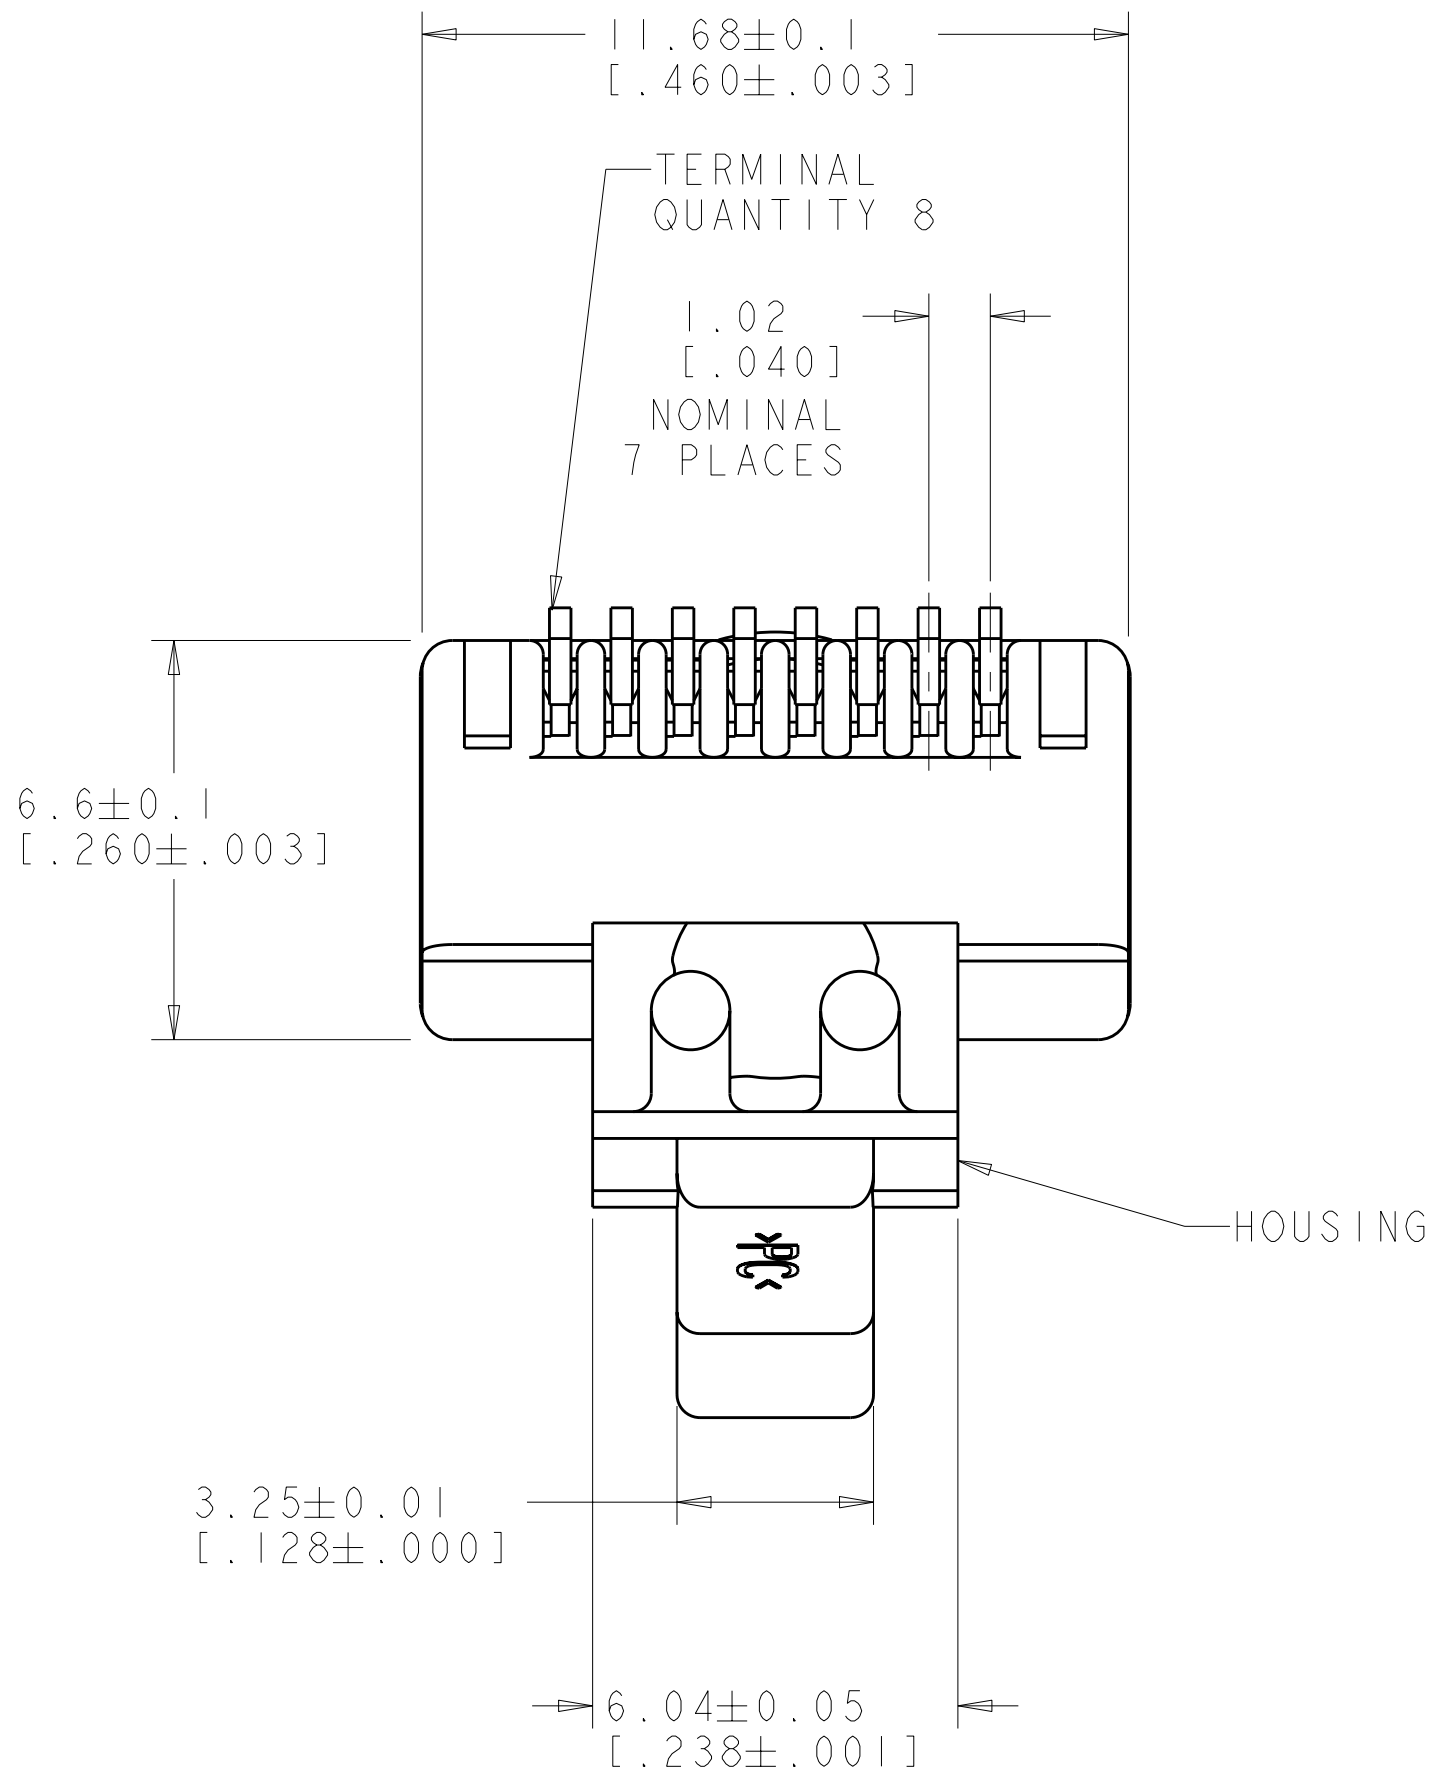
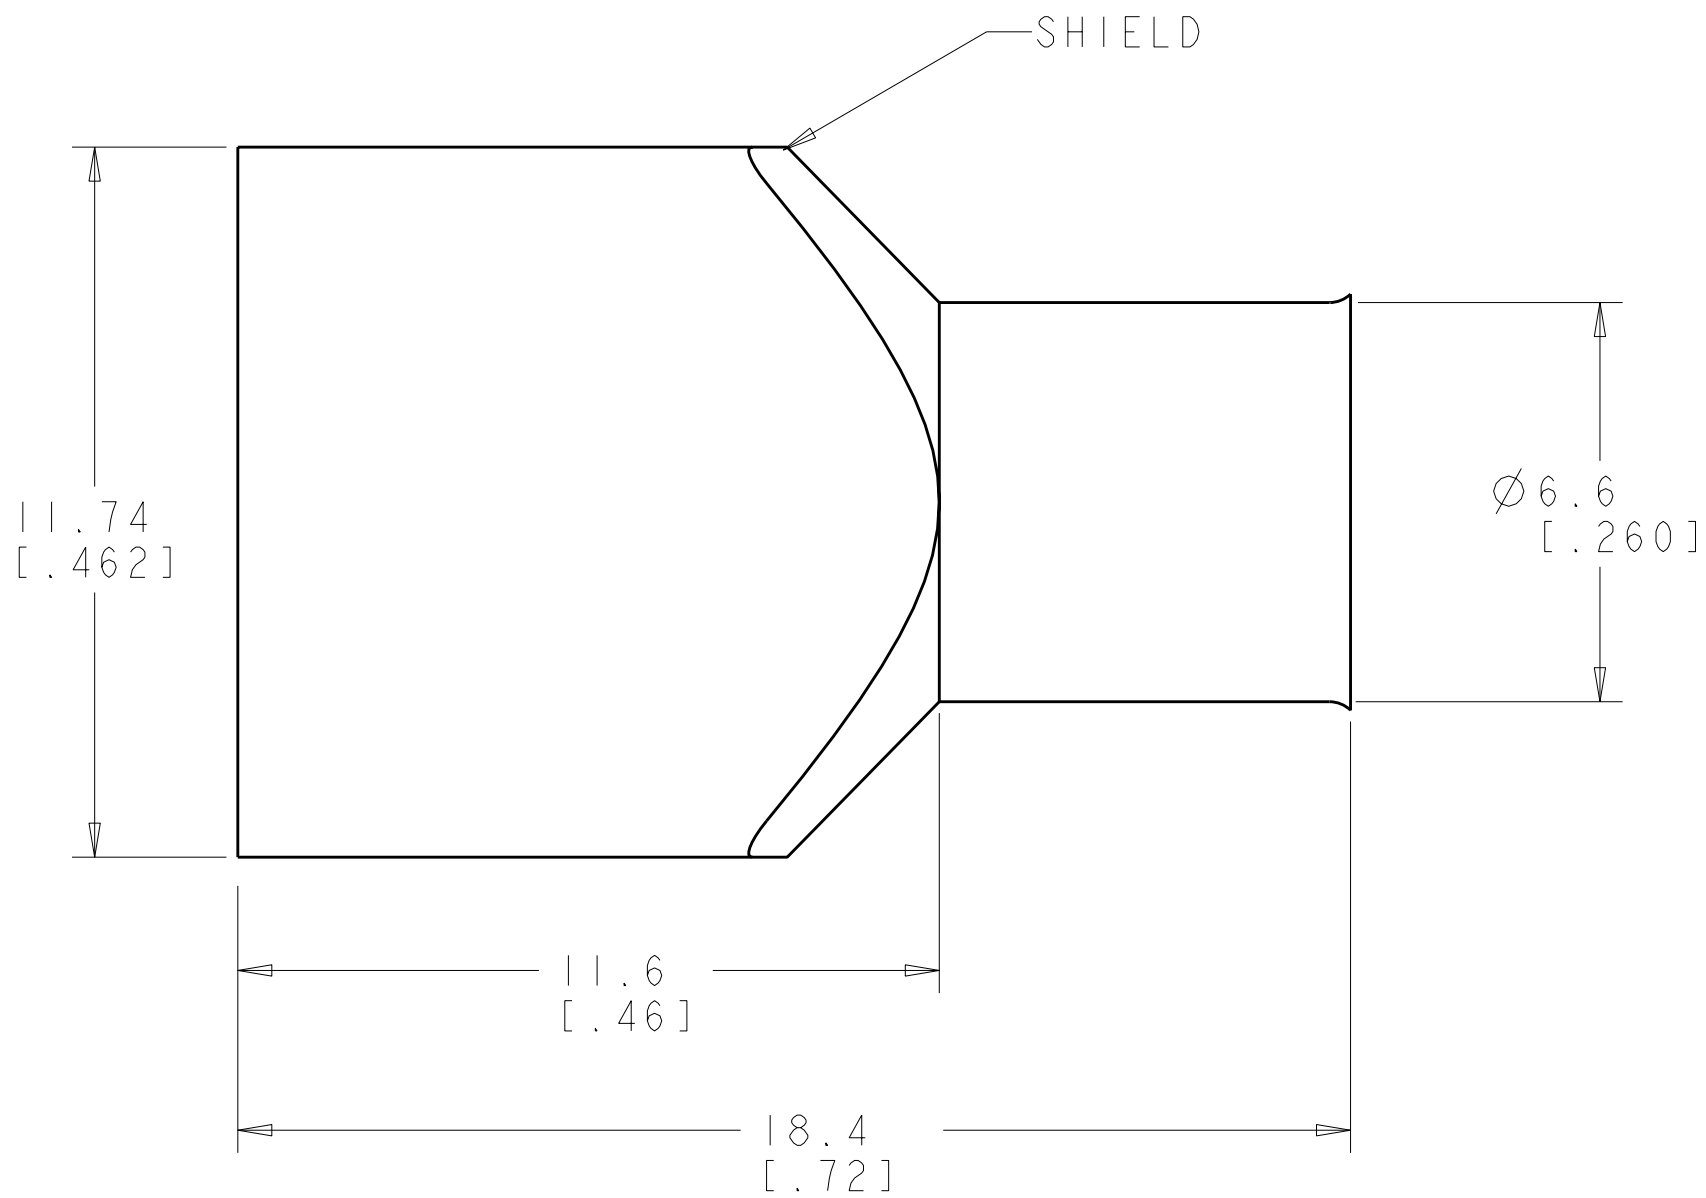


LOC		DIST		REVISIONS			
HM	00	F	LYR	DESCRIPTION	DATE	DWN	APVD
		E		REV ECO-08-011017	05MAY2008	LH	BM

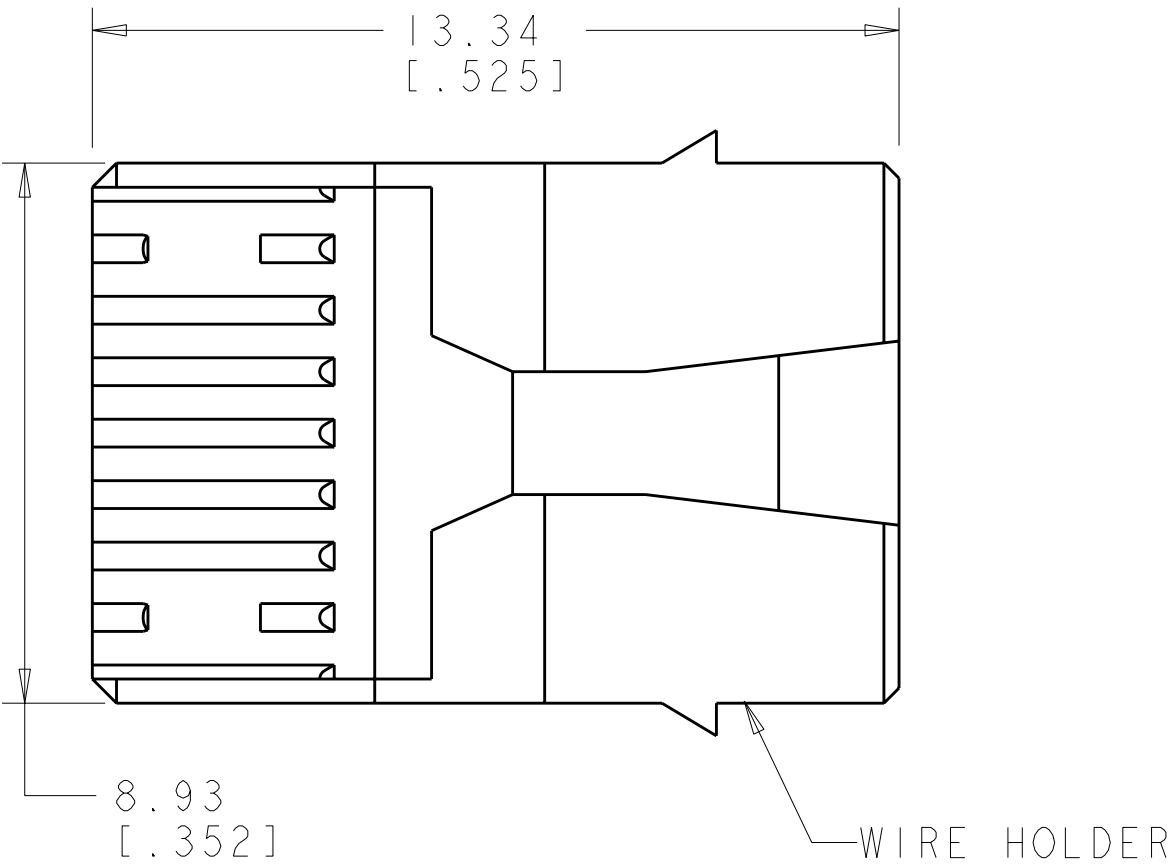

1. MATERIAL: HOUSING - 94V-0 RATED POLYCARBONATE CLEAR TERMINAL - 0.36 [0.014] THICK PHOSPHAR BRONZE PLATED WITH 1.27 μ m [0.00050] MINIMUM THICK GOLD IN LOCALIZED AREA, GOLD FLASH OVER THE REMAINDER, OVER 2.54 μ m [0.00100] MINIMUM THICK NICKEL UNDERPLATE. WIRE HOLDER - POLYCARBONATE MAKROLON CLEAR. SHIELD - BRASS DIN 17660 - CuZn33.
2. DIMENSIONS ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
3. PLUG WILL ACCEPT A 23-24 AWG SOLID CONDUCTOR, PROVIDED THE INSULATION CONDUCTOR DIAMETER IS WITHIN .89 - 1.09 [0.035 - .043]; WITH THE SUM OF DIAMETERS FOR ALL EIGHT CONDUCTORS WITHIN THE CABLE MUST NOT EXCEED 7.8MM [0.31 IN]. CABLE JACKET DIAMETER OF 5.0 - 6.0MM [0.20-0.24 IN].
4. TERMINATED DIMENSION 6.15 [0.242] MAXIMUM.
5. PACKAGE 1,000 ASSEMBLIES, 1,000 WIRE HOLDERS, AND 1,000 SHIELDS.
6. PACKAGE 100 ASSEMBLIES, 100 WIRE HOLDERS, AND 100 SHIELDS.
7. PACKAGE 25 ASSEMBLIES, 25 WIRE HOLDERS, AND 25 SHIELDS.
8. PACKAGE 500 ASSEMBLIES, 500 WIRE HOLDERS, AND 500 SHIELDS.
9. MODULAR PLUG BOOT PART NUMBER 737893-X (X-DENOTES VARIOUS COLORS) MAY BE USED WITH KIT ASSEMBLY SHOWN.
10. UL RECOGNIZED: FILE NUMBER E81956.

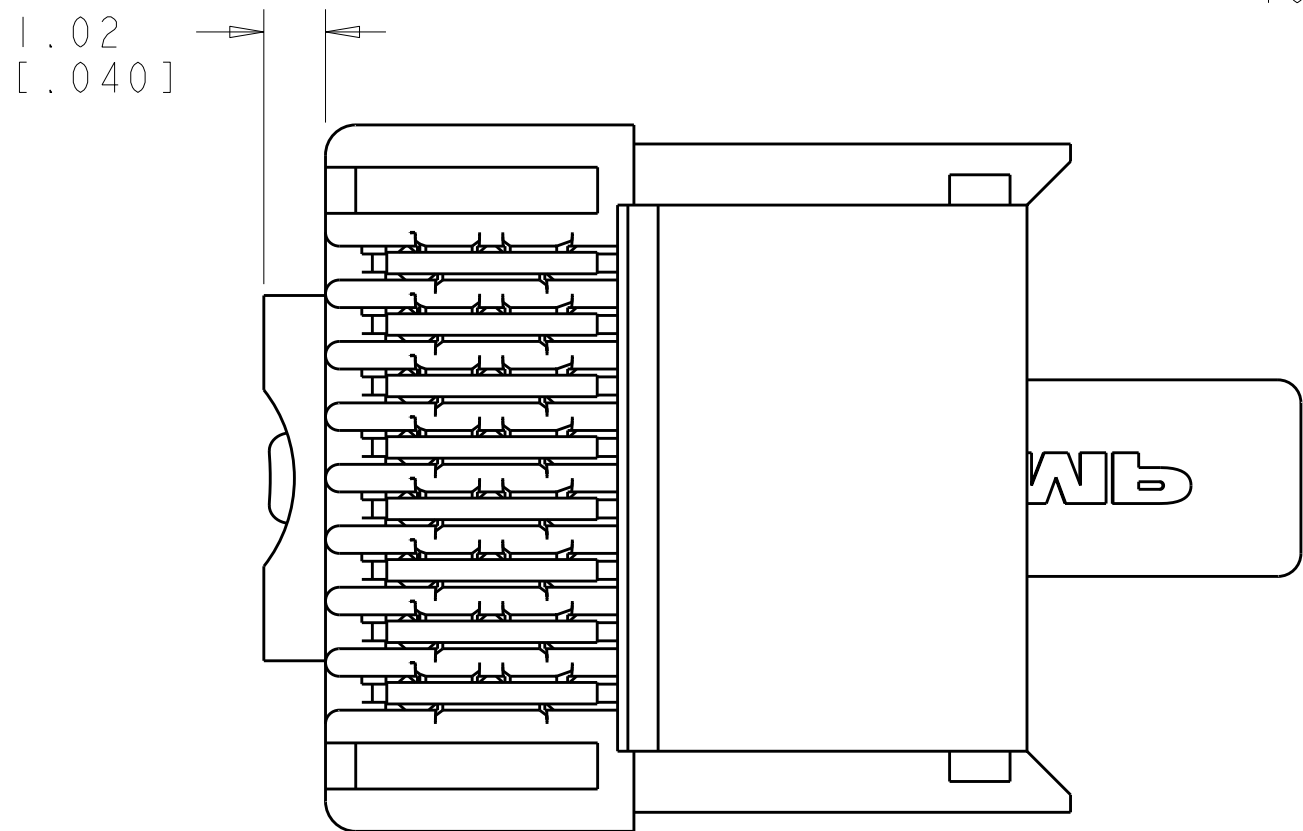

7	5-1375204-4
6	5-1375204-3
8	5-1375204-2
5	5-1375204-1
PACKAGE	PART NO.

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE CONTROLLED TO PREVENT UNAUTHORIZED REPRODUCTION AND DISTRIBUTION. IT IS TO BE CONTROLLED TO PREVENT UNAUTHORIZED REPRODUCTION AND DISTRIBUTION. IT IS TO BE CONTROLLED TO PREVENT UNAUTHORIZED REPRODUCTION AND DISTRIBUTION.		DWN	L. HALL	30JUL2001	Tyco Electronics Harrisburg, PA 17105-3608		
DIMENSIONS: MM [INCHES]		CHK	M. DELPHIAS	06AUG2001	NAME KIT, 8 POSN, MOD PLUG, SOLID WIRE, CAT 6		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	M. DELPHIAS	06AUG2001	SIZE A1		
9 PLC ±		PRODUCT SPEC		DRAWING NO			
2 PLC ±		108-1990		CAGE CODE			
3 PLC ±		APPLICATION SPEC		DRAWING NO			
5 PLC ±		114-13035		CAGE CODE			
4 PLC ±		WEIGHT		REV			
ANGLES		FINISH		E			
MATERIAL		CUSTOMER DRAWING		SCALE			
:		:		8:1			
				SHEET			
				1 OF 1			
				REV			
				E			