

HUBER+SUHNER® DATA SHEET


Coaxial PCB Connector: 85_QMA-S50-0-2/111_N



Description

Right angle PCB jack

Interface Standards
QMA QLF compliant

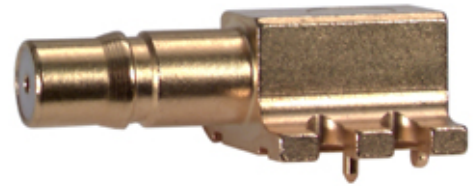

Technical Data

Electrical Data

Impedance 50 Ω
Interface frequency max. 18 GHz

Mechanical Data

Board mounting type surface mount
Weight 0.0064 kg

Environmental Data

Operating Temperature -40 °C to 85 °C
2002/95/EC (RoHS) compliant

Material Data

Piece Parts

| | |
|----------------|---------------------------|
| Centre contact | Copper Beryllium / Bronze |
| Outer contact | Brass |
| Body | Brass |
| Insulator | PFA / PTFE |

Surface Plating

SUCOPRO Plating
SUCOPRO Plating
SUCOPRO Plating

Related Documents

Outline drawing DOU-00012592
Mounting hole DOU-00013090

Ordering Information

| | |
|-----------------------|-----------------------|
| Bulk 100 pcs package | 85_QMA-S50-0-2/111_NH |
| Single package | 85_QMA-S50-0-2/111_NE |
| Tape and Reel package | 85_QMA-S50-0-2/111_NM |

HUBER+SUHNER is certified according to ISO 9001 and ISO 14001

WAIVER!

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical contained specifications and/or the fitness for any particular purpose. The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

HUBER+SUHNER – Excellence in Connectivity Solutions



HUBER+SUHNER AG
RF Technology
9100 Herisau, Switzerland
Phone +41 (0)71 353 41 11
Fax +41 (0)71 353 45 90
www.hubersuhner.com