




REV.	DATE	DESCRIPTION
NC	06/23/07	INITIAL RELEASE

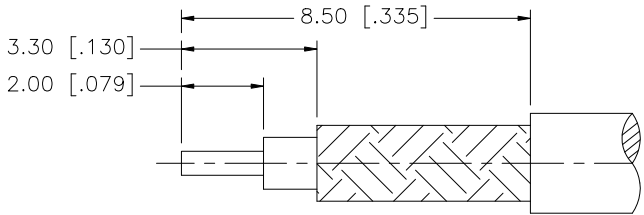

RECOMMENDED
CABLE STRIPPING DIM'S

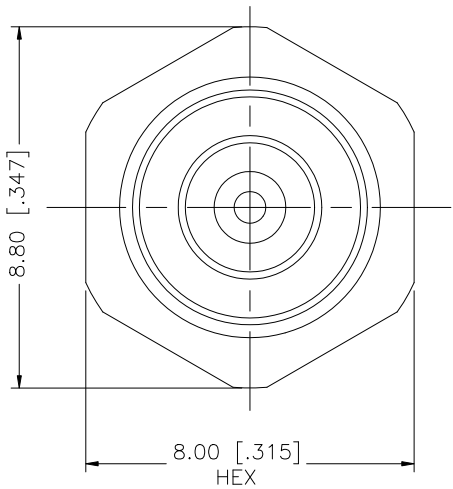

1/4-36UNS-2A

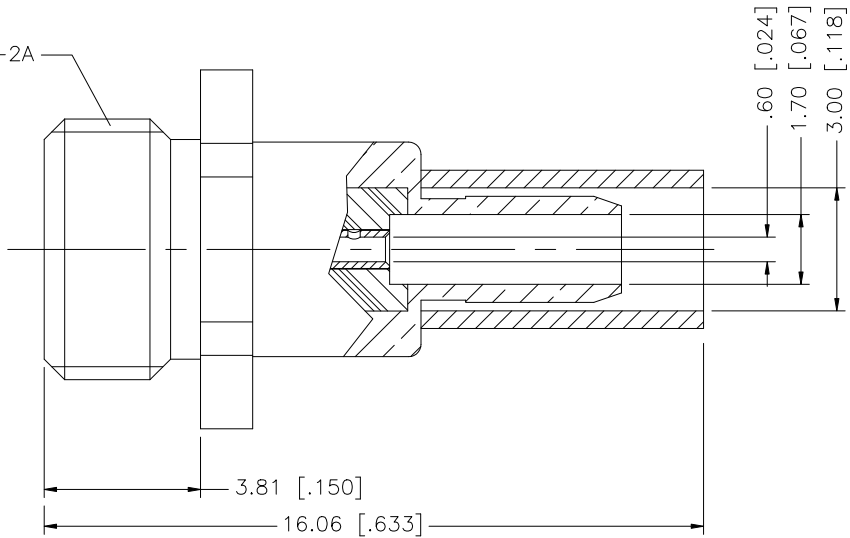

8				
7				
6				
5				
4	FERRULE	COPPER	GOLD	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	06/23/07
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/252/252193.DWG

Amphenol Connex			
PART DESCRIPTION			
MCX CRIMP JACK (FOR RG-316 CABLE)			
PART NO.			
252193			
DWG. NO.	252193.DWG	REV.	NC
SIZE	A	SCALE	NA