


ROHS COMPLIANT		PRODUCT DATA DRAWING		REVISION HISTORY			
REV	DESCRIPTION			DATE	APPROVED		
-	REL. NRN 35091			11/11/08	STW		

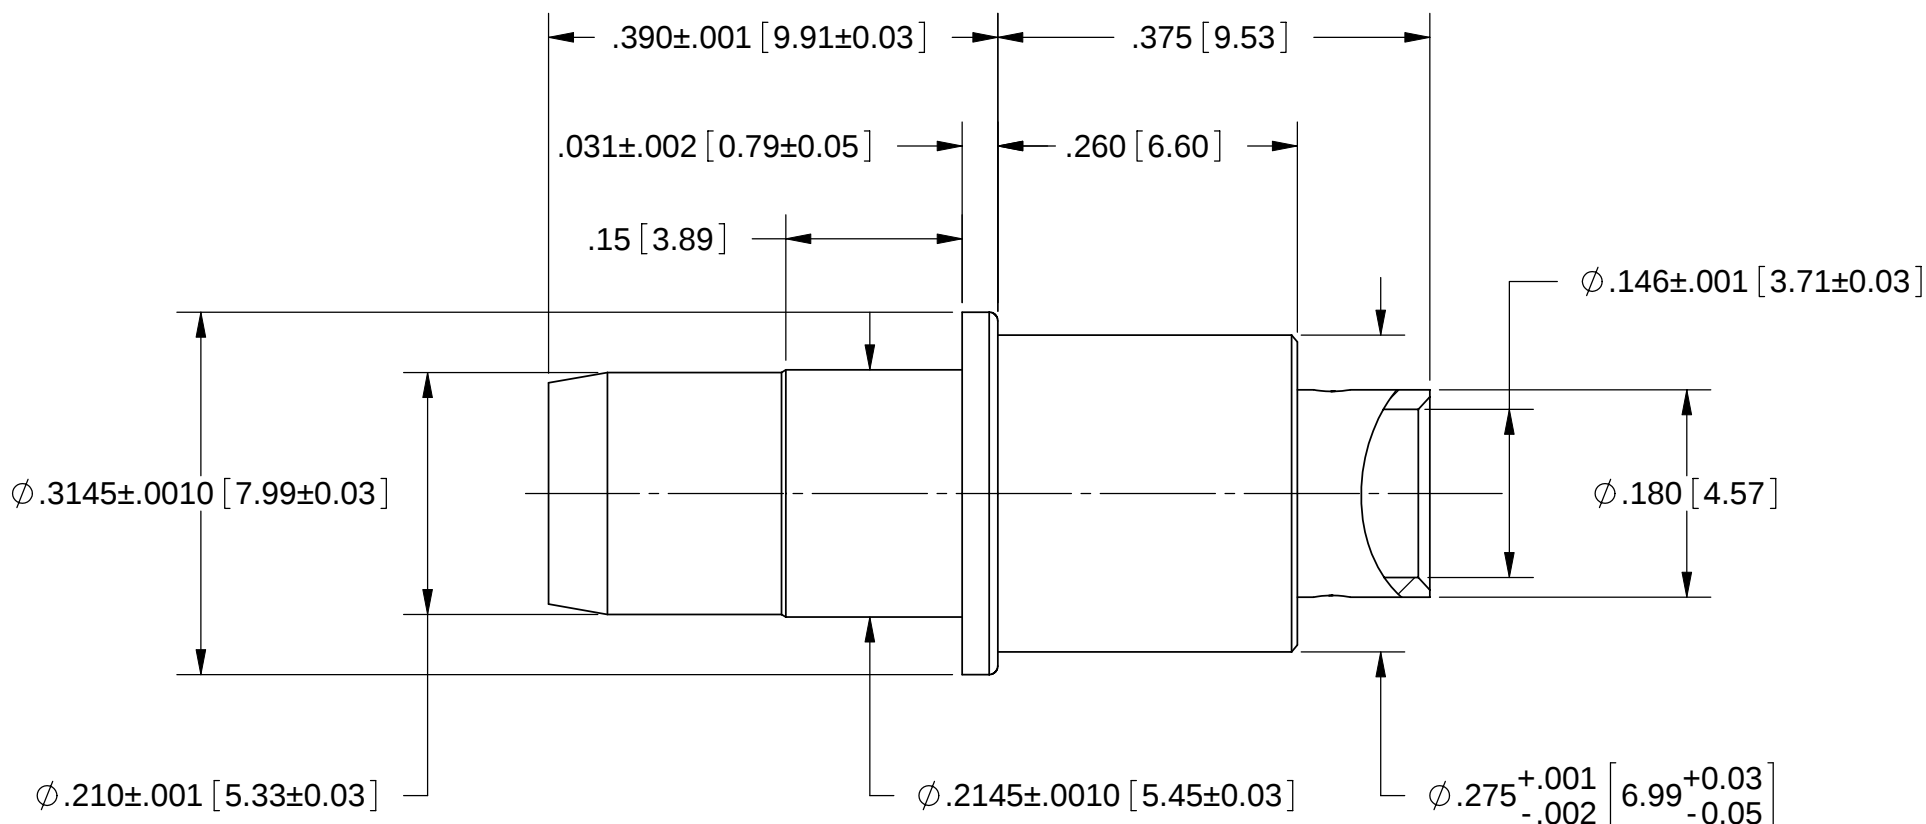

MATERIAL:

BODY:

CONTACT:

INSULATOR:

FINISH:

BODY:

CONTACTS:

PERFORMANCE:

IMPEDANCE:

FREQ. RANGE:

VSWR:

DWV:

INSUL. RES.:

STAINLESS STEEL PER AMS-5640,
ALLOY UNS S30300, TYPE 1

BERYLLIUM COPPER PER ASTM B196,
ALLOY No. UNS C17300, TD04

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

GOLD PER ASTM B488, TYPE II,
CODE C, CLASS 1.27 OVER NICKEL
PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

GOLD PER ASTM B488, TYPE II,
CODE C, CLASS 1.52 OVER NICKEL
PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

50 OHMS
DC TO 18 GHz
1.30:1 DC TO 18 GHz
1000 VRMS
5000 MEGOHMS MIN.

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'
-----------	-----------	---